


AERODROME
CHART - ICAO

ARP 543927N 0061257W

AD ELEV 268FT


BELFAST ALDERGROVE
EGAA

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 07/25	Grooved Asphalt	71/R/B/X/T	-
RWY 17/35	Porous Friction Course	71/F/C/W/U	-
Main Apron	Asphalt	71/R/B/W/U	232ft amsl
East Apron	Asphalt	71/R/B/W/U	241ft amsl
West Apron	Concrete	71/R/B/W/U	222ft amsl
GA Apron	Concrete	15	248ft amsl
Echo Apron	Asphalt/Concrete	-	-
Twy A, C, D	Asphalt	71/R/B/W/U	-
Twy B	Concrete	71/R/B/W/U	-
Twy F	Asphalt	71/R/B/W/U	-
Twy L	Asphalt/Concrete	71/R/B/W/U	-



GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL	454 (186)

VAR 3.8°W - 2015
N
Annual Rate
of Change 0.17°E

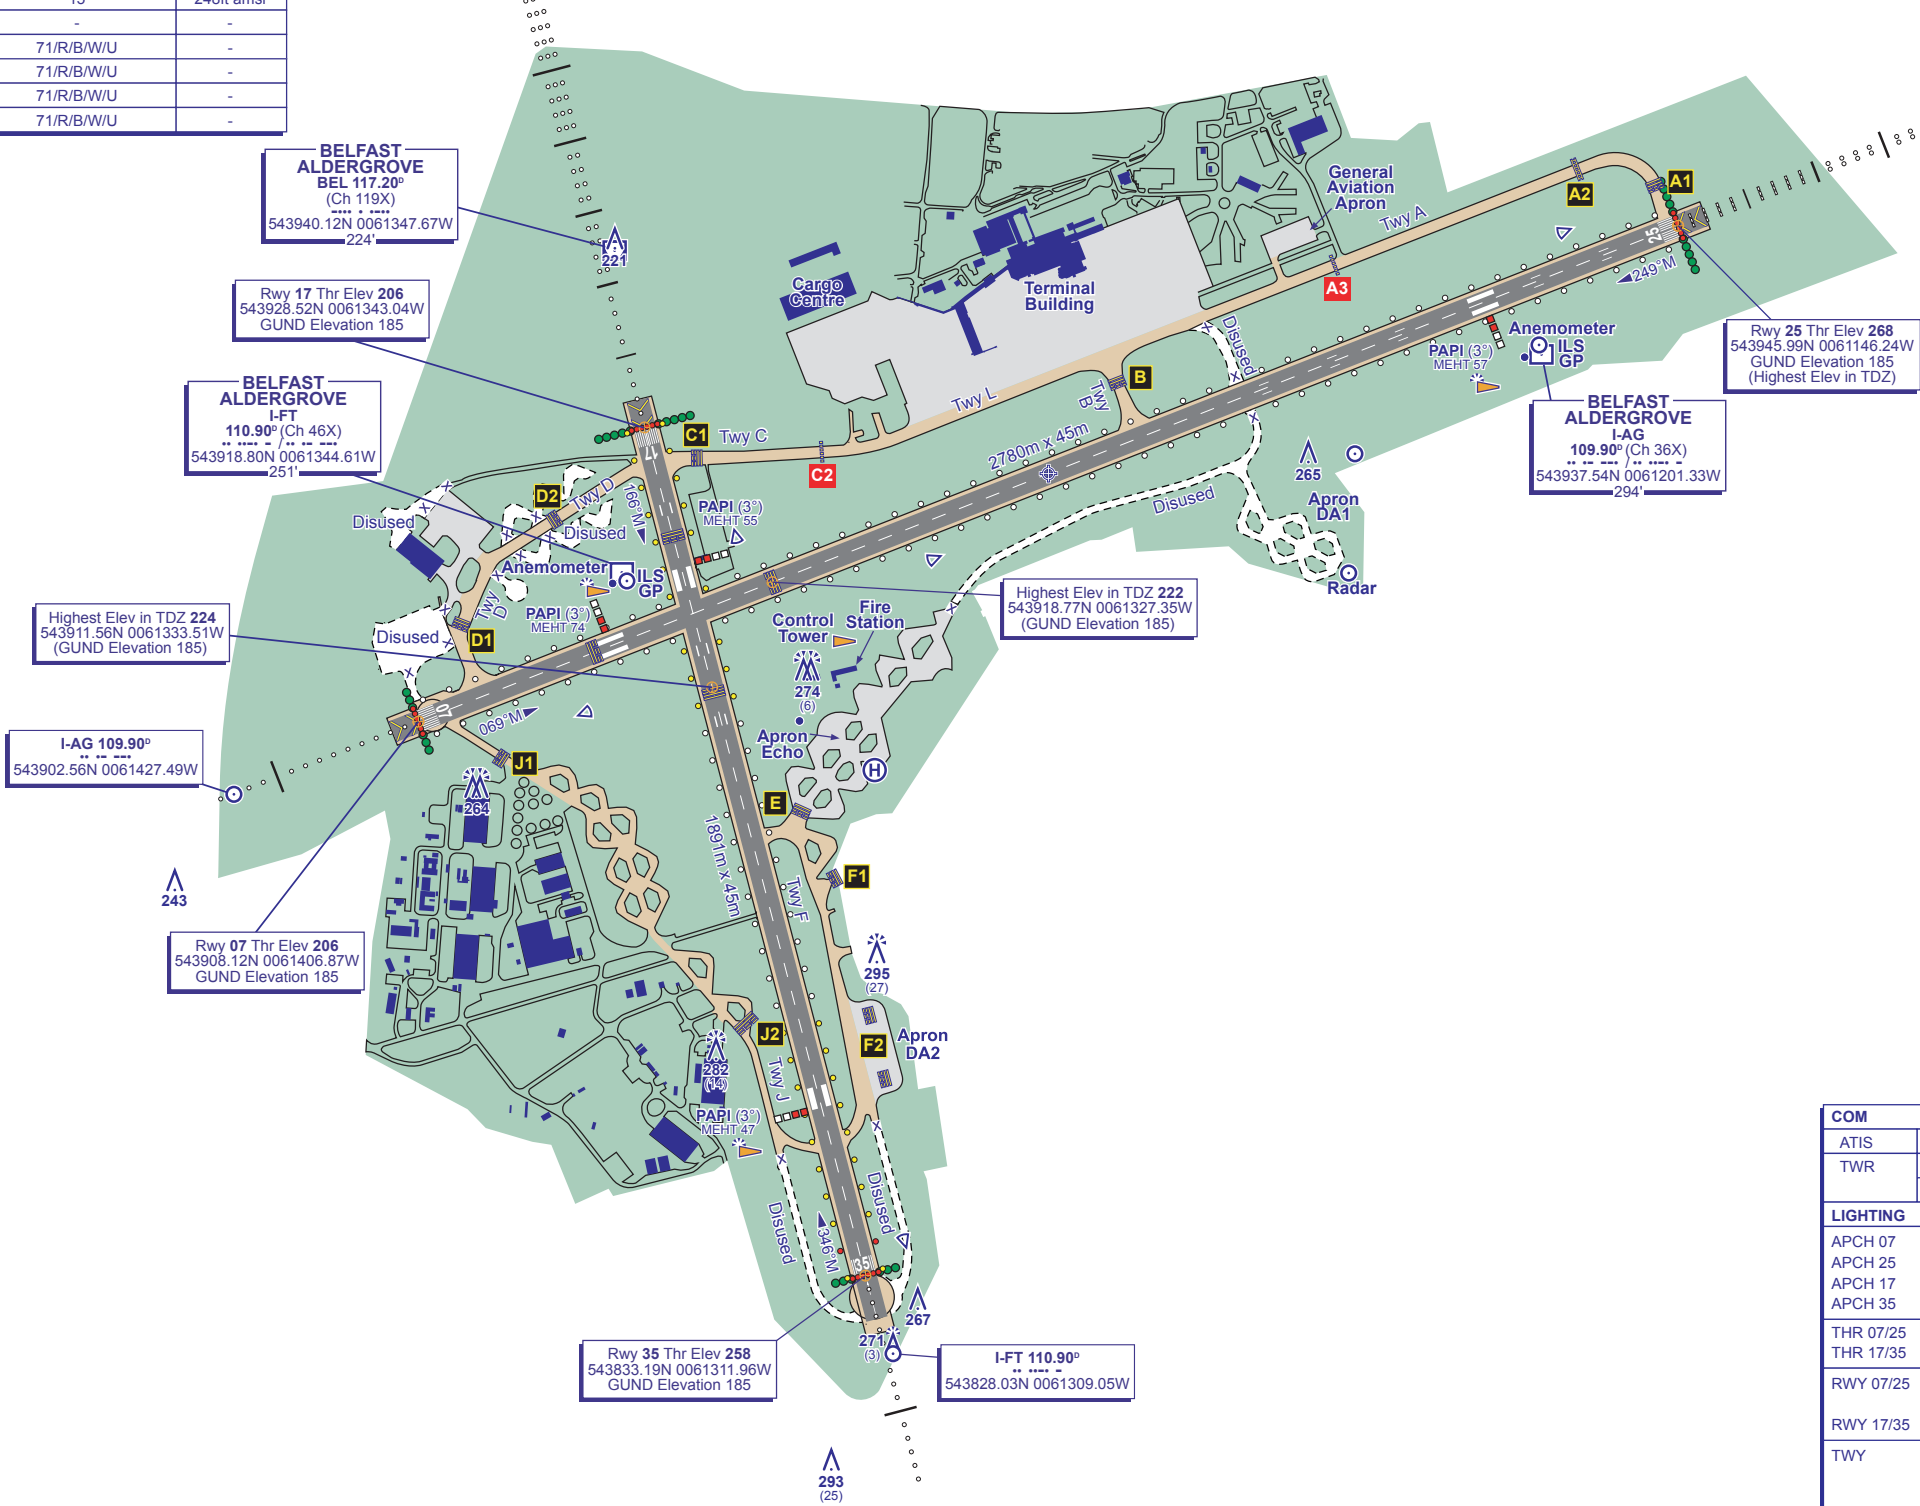

COM		
ATIS	128.200	ALDERGROVE INFO
TWR	118.300	ALDERGROVE TOWER
	121.600	BELFAST FIRE
LIGHTING		
APCH 07	439m HI C/L with 1 bar.	
APCH 25	882m HI Coded C/L with 5 bars. 288m HI supplementary inner.	
APCH 17	910m HI Coded C/L with bars.	
APCH 35	522m C/L with 1 bar.	
THR 07/25	HI green with HI green W bars.	
THR 17/35	HI green with HI green W bars.	
RWY 07/25	HI elev bi-d edge with LI omni-d component. HI Colour Coded C/L. End lights red	
RWY 17/35	HI elev bi-d edge with LI omni-d component. End lights red.	
TWY	Yellow centre-line and holding position markings on all taxiways Green centre-line lighting on Taxiways A, B, C, D, J and L Alternate green-red lead on/off lights from runways to stop bars Blue edge lights on B and F Runway guard lights at runway holding positions.	

CHANGE (3/16): OBSTACLES AMENDED.

AERO INFO DATE 26 NOV 15