AERODROME CHART - ICAO

ARP 543705N 0055221W

AD ELEV 15FT

BELFAST CITY
EGAC

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	**SURFACE**	**BEARING STRENGTH**
RWY 04/22	Grooved Asphalt	69/F/D/W/T
Terminal Stands		
Stands 1,2,9,10	Concrete	29/R/D/W/T
Stands 3-8	Concrete	48/R/D/W/T
Stand 21	Concrete	30/R/D/W/T
Stand 24	Concrete	39/R/D/W/T
Victoria Apron	Concrete	30/R/D/W/T
Taxiway A	Asphalt	50/F/D/W/T

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Elipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL	**99**
HEIGHTS IN FEET ABOVE AD	(84)

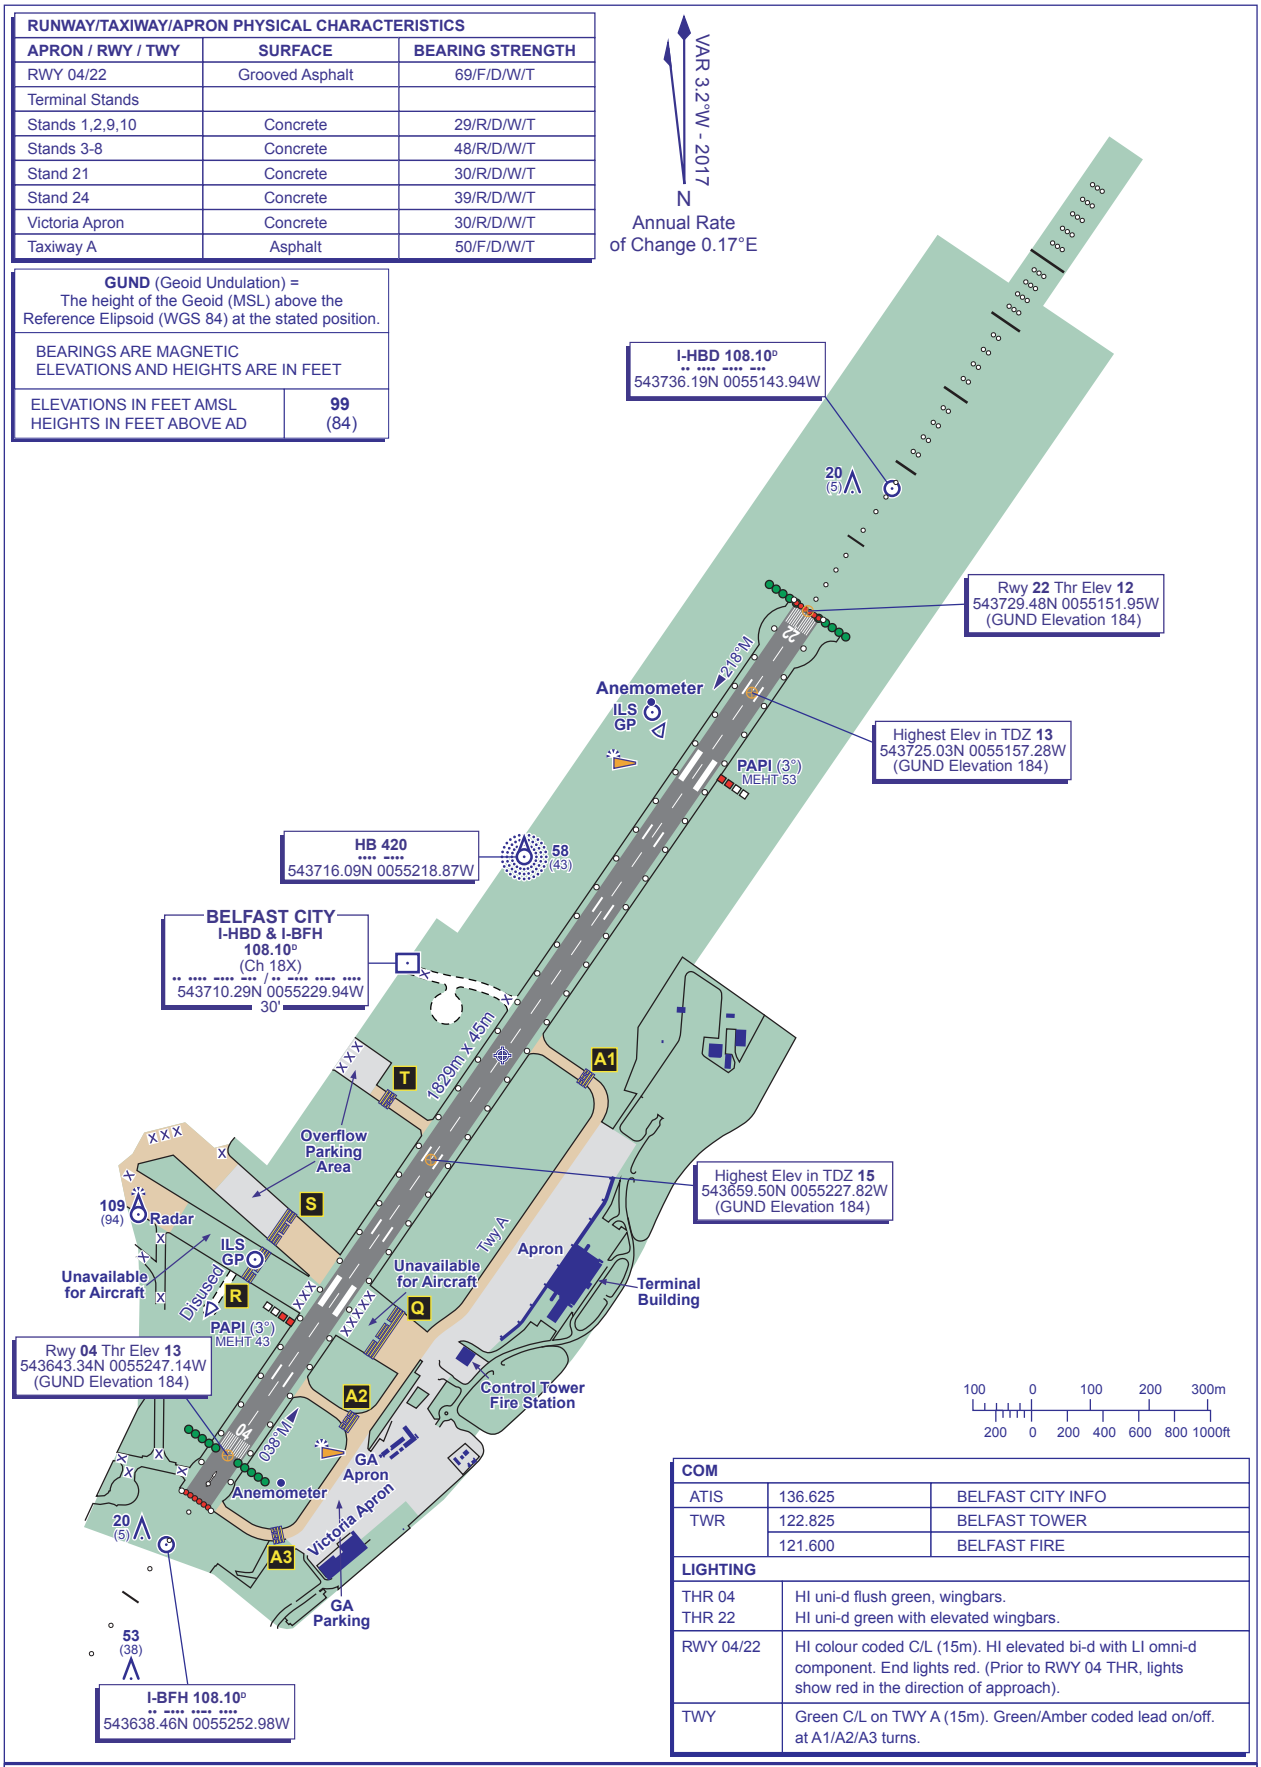

COM		
ATIS	136.625	BELFAST CITY INFO
TWR	122.825	BELFAST TOWER
	121.600	BELFAST FIRE

LIGHTING	
THR 04 THR 22	HI uni-d flush green, wingbars. HI uni-d green with elevated wingbars.
RWY 04/22	HI colour coded C/L (15m). HI elevated bi-d with LI omni-d component. End lights red. (Prior to RWY 04 THR, lights show red in the direction of approach).
TWY	Green C/L on TWY A (15m). Green/Amber coded lead on/off. at A1/A2/A3 turns.

CHANGE (9/16): MAG VAR. RUNWAY TOUCH DOWN ZONE MARKINGS AMENDED.

AERO INFO DATE 25 MAY 16