

INSTRUMENT APPROACH CHART - ICAO


CARDIFF

RNAV (GNSS)


RWY 30

(ACFT CAT A,B,C,D)

MSA 25NM NDB(L) CDF	MSA 10NM NDB(L) CDF	APP 119.150, 125.850	CARDIFF APPROACH	AD ELEVATION 220	EGNOS CH 84240 E30A MIN TEMP -10°C TRANSITION ALTITUDE 6000
		TWR 133.100	CARDIFF TOWER	THR ELEVATION 213	
		RAD 125.850	CARDIFF RADAR	OBSTACLE ELEVATION 1299 AMSL (1086) (ABOVE THR)	
		119.150 (LARS)		BEARINGS ARE MAGNETIC	
		ATIS 132.475	CARDIFF INFORMATION		

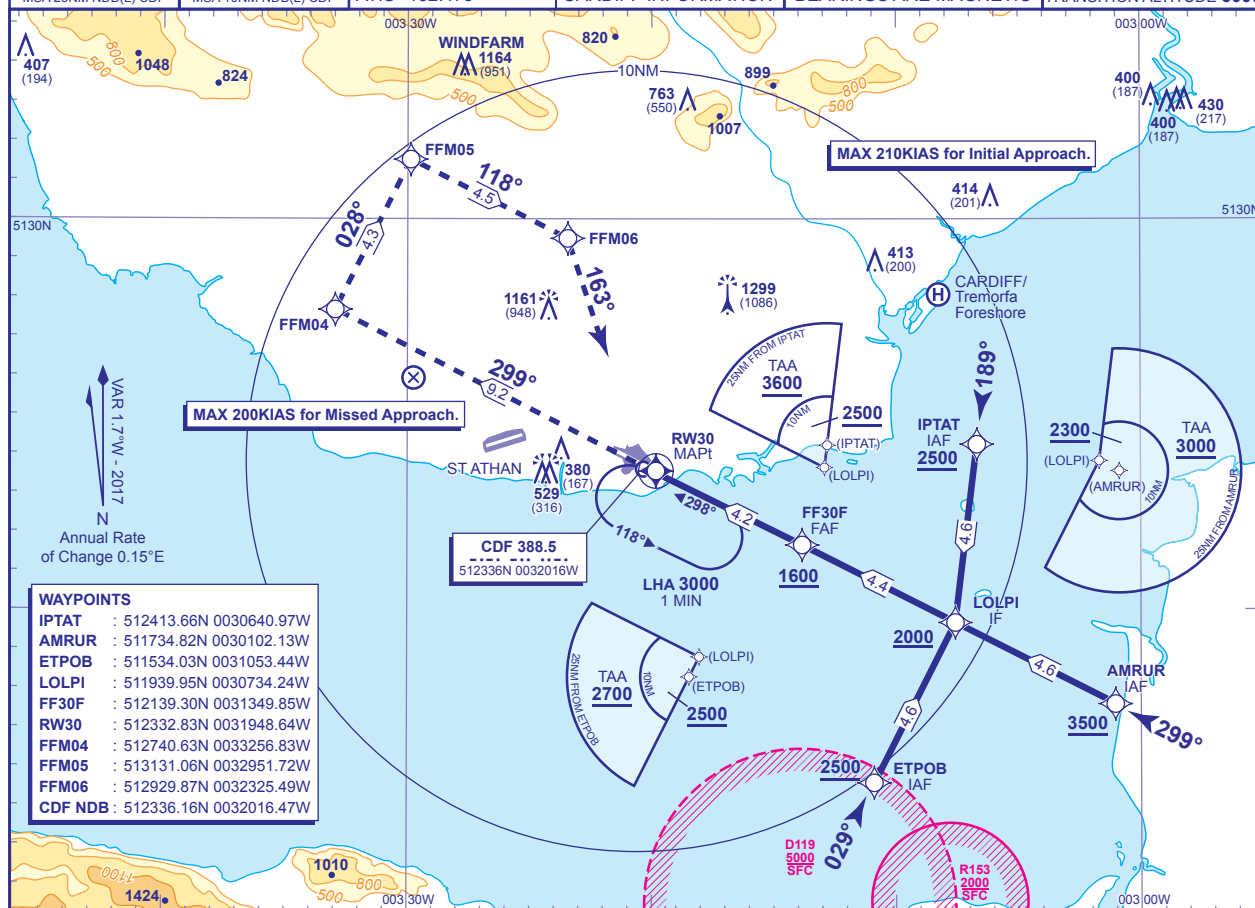

NM to RW30	4	3	2	1
ALT(HGT)	1540(1327)	1220(1007)	900(687)	580(367)

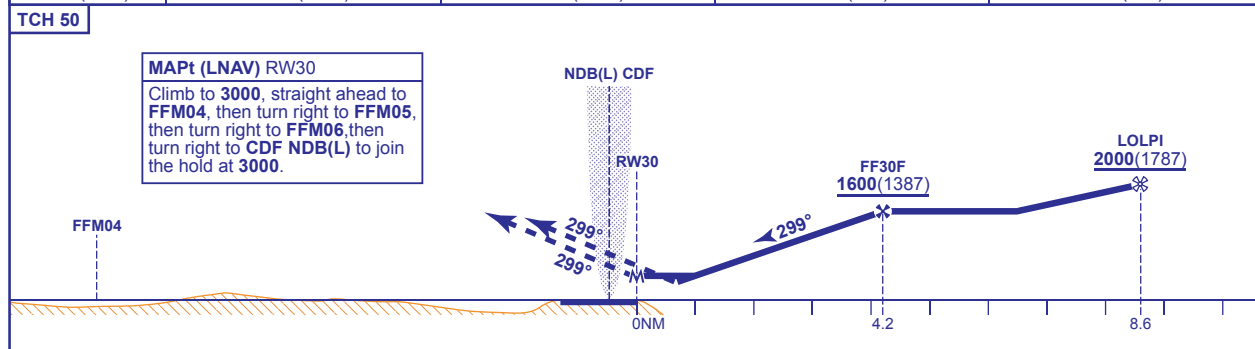

Aircraft Category	A	B	C	D	Rate of descent	G/S KT	160	140	120	100	80
OCA (OCH)	LNAV	540(327)	540(327)	540(327)	540(327)	FT/MIN	850	740	640	530	420
	LNAV/VNAV	470(257)	470(257)	470(257)	470(257)						
	LPV	463(250)	467(254)	475(262)	486(273)						
VM(C)OCA (OCH AAL)	Total Area	680(460)	820(600)	1560(1340)	1690(1470)						
	SW of RWY 12/30	680(460)	820(600)	920(700)	920(700)						

NOTE NDB(L) CDF required for missed approach.

CHANGE (11/16): NEW CHART.

AERO INFO DATE 6 JUL 16