


AIRCRAFT PARKING/DOCKING
CHART - ICAO

ARP 505722N 0005621E

AD ELEV 13FT

LYDD
EGMD


GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL	46
HEIGHTS IN FEET ABOVE AD	(33)



VAR 0.1°W - 2017
N
Annual Rate
of Change 0.14°E

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 03/21	Grooved Asphalt	46/F/C/X/T	-
Apron B	Asphalt	46/F/C/X/T	10ft amsl
Apron C	Asphalt	-	-
Taxiways A & D	Asphalt	-	-
Taxiways B & C	Asphalt	46/F/C/X/T	-

COM		
ATIS	129.225	LYDD INFORMATION
TWR	120.700	LYDD APPROACH/TOWER
	119.375(As Directed)	LYDD TOWER
	121.600	LYDD FIRE
LIGHTING		
THR 03	HI elev green uni-d.	
THR 21	HI green flush uni-d. HI elev green Wbars.	
RWY 03/21	Elev HI bi-d with LI omni-d component. End lights red.	
TWY	Blue edge on B, C Taxiways.	

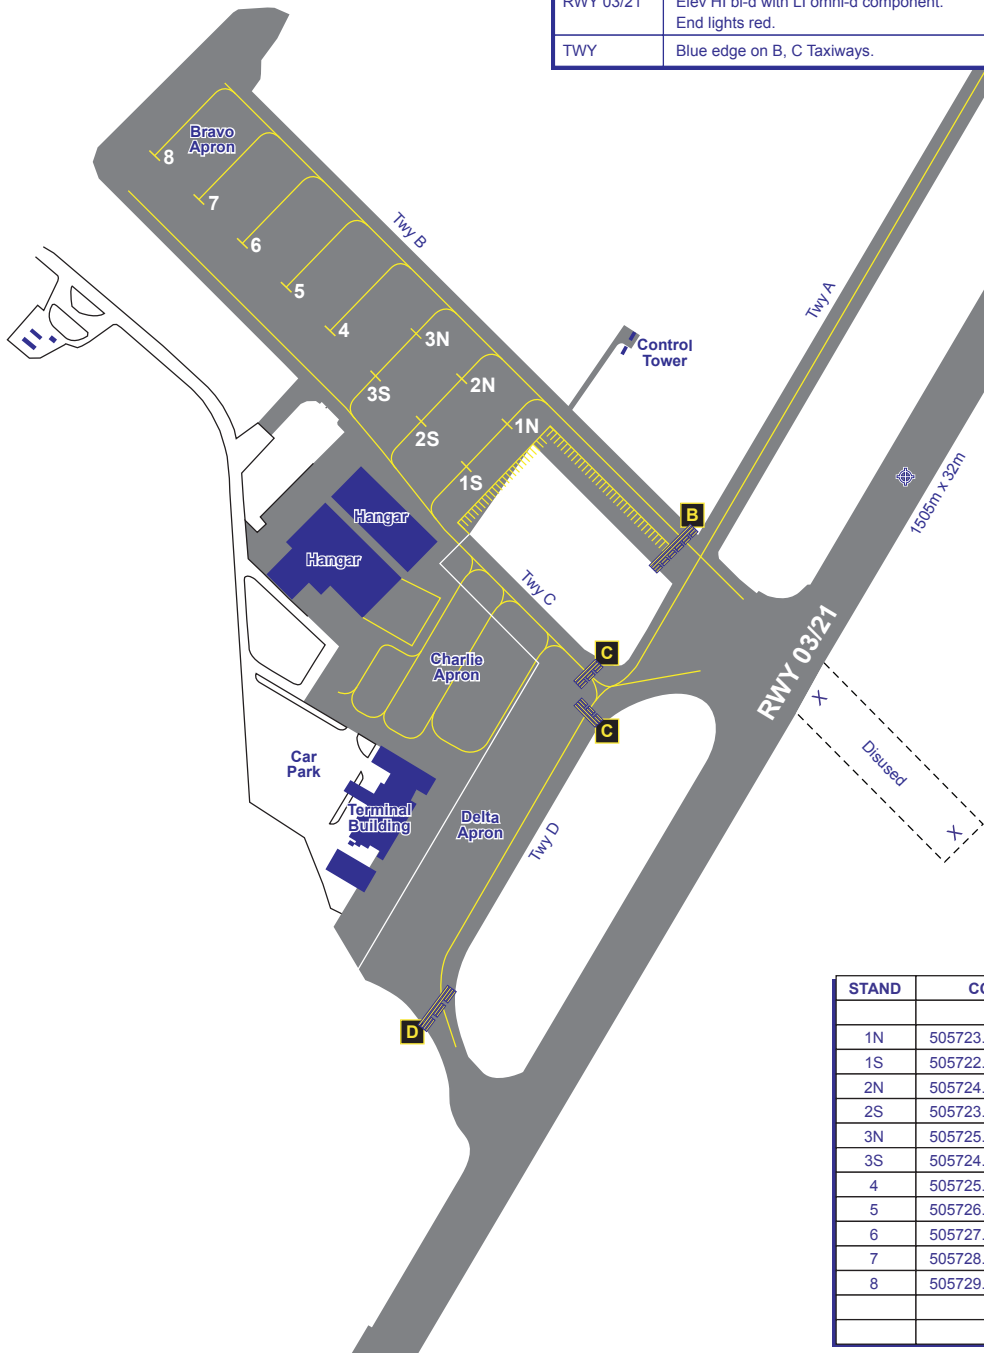

CHANGE (3/17): MAG VAR. DISUSED AREA/HOLDS/STAND CENTRE LINES AMENDED. NEW HANGAR ADDED. TWY C DESIGNATED.

AERO INFO DATE 15 DEC 16