

SCATSTA
EGPM

AD ELEV 81FT


ARP 602558N 0011746W

AIRCRAFT PARKING/DOCKING
CHART - ICAO

COM		COM
ATIS	128.500	SCATSTA INFORMATION
RAD	131.000	SCATSTA RADAR
TWR	123.600	SCATSTA TOWER
	121.600	SCATSTA FIRE
LIGHTING		
THR 06/24	HI with W bars.	
RWY 06/24	HI bi-d edge with LI omni-d component. YZ. End lights red.	
TWY	Blue edge. Uni-d inset red stop bars at Holds A and B.	

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 06/24	Macadam	32/F/B/Y/T	-
Main Apron	Macadam	39/F/B/Y/T	-
Main Taxiway	Macadam	44/F/B/Y/T	-

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position. BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	191 (110)
ELEVATIONS IN FEET AMSL HEIGHTS IN FEET ABOVE AD	

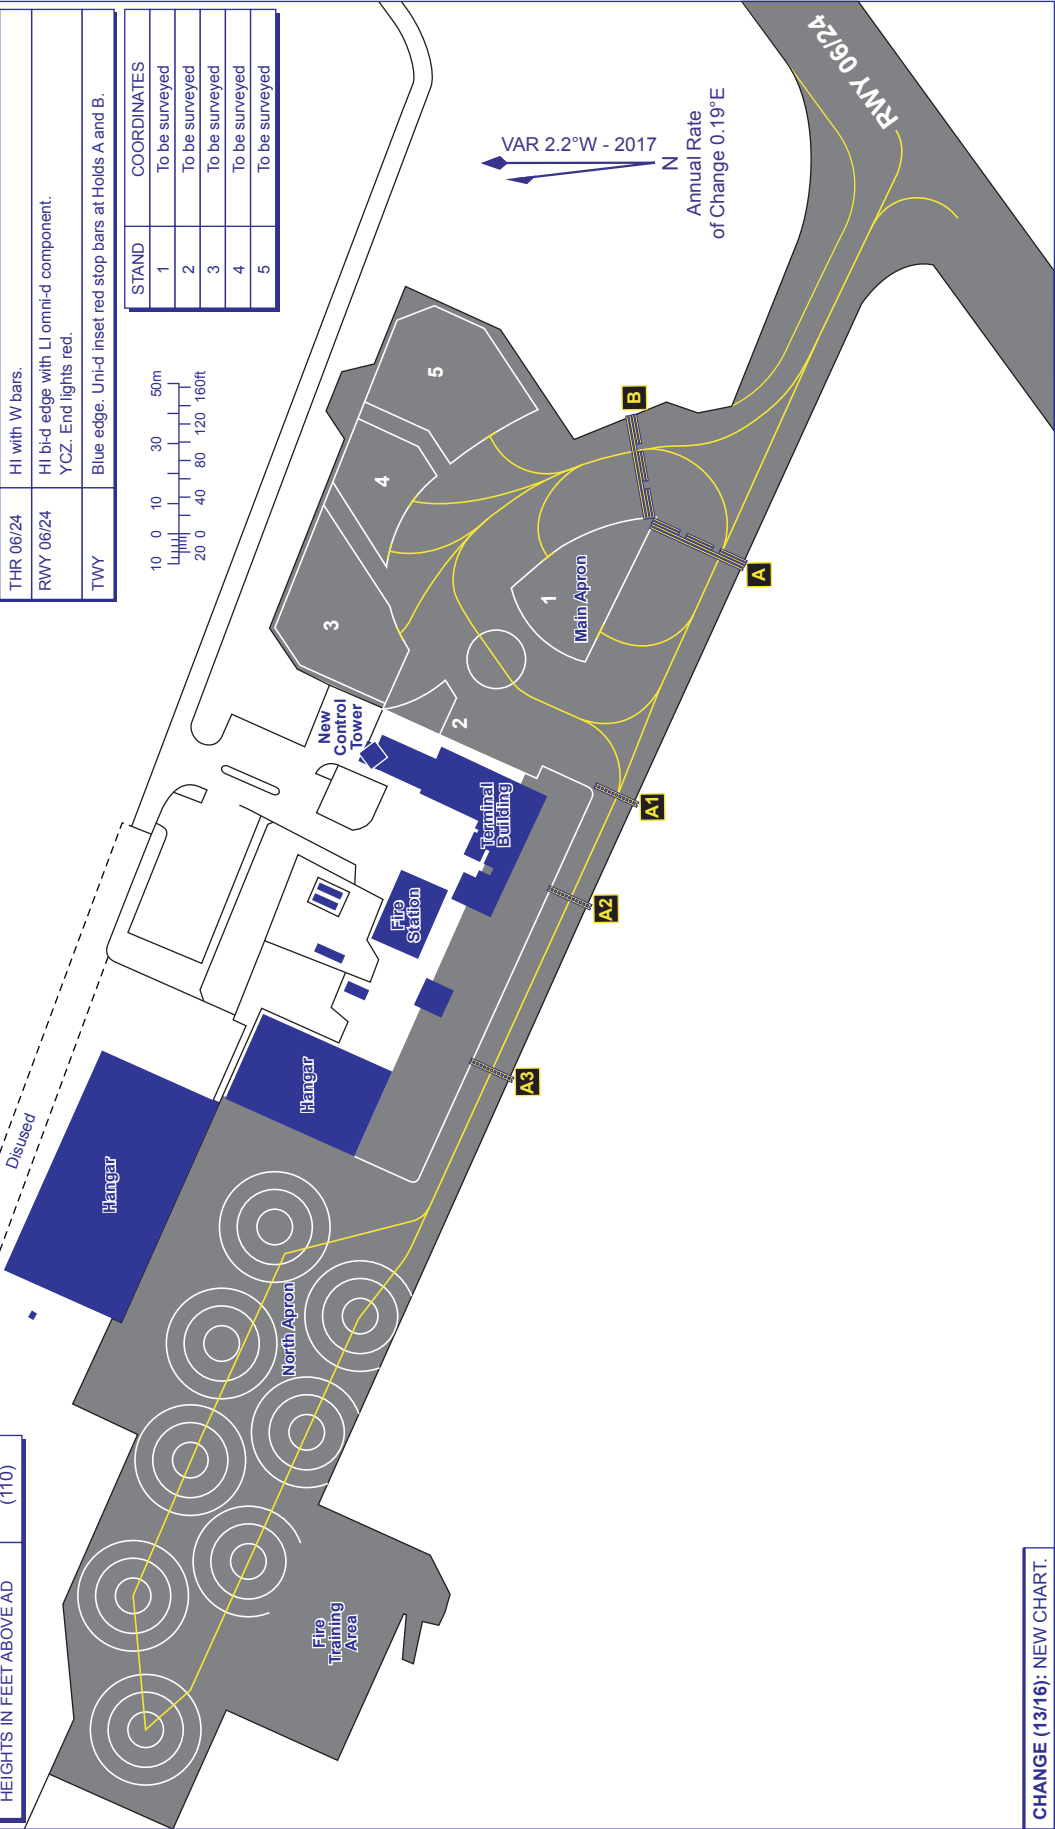

AERO INFO DATE 30 SEP 16