AERODROME CHART - ICAO

ARP 581256N 0061952W

AD ELEV 26FT

STORNOWAY
EGPO

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Elipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL	**109**
HEIGHTS IN FEET ABOVE AD	(83)

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS

APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 06/24	Grooved Asphalt	9/F/B/Y/U	-
RWY 18/36	Grooved Asphalt	47/F/A/W/T	-
Main Apron	Brick	32/F/B/X/T	22ft amsl
Lower Apron	Concrete	6/R/B/X/T	-
Taxiway A	Asphalt	15/F/A/X/T	-
Taxiway B	Asphalt	9/F/B/Y/U	-
Taxiway C	Concrete	-	-
Taxiway Apron	Concrete	-	-

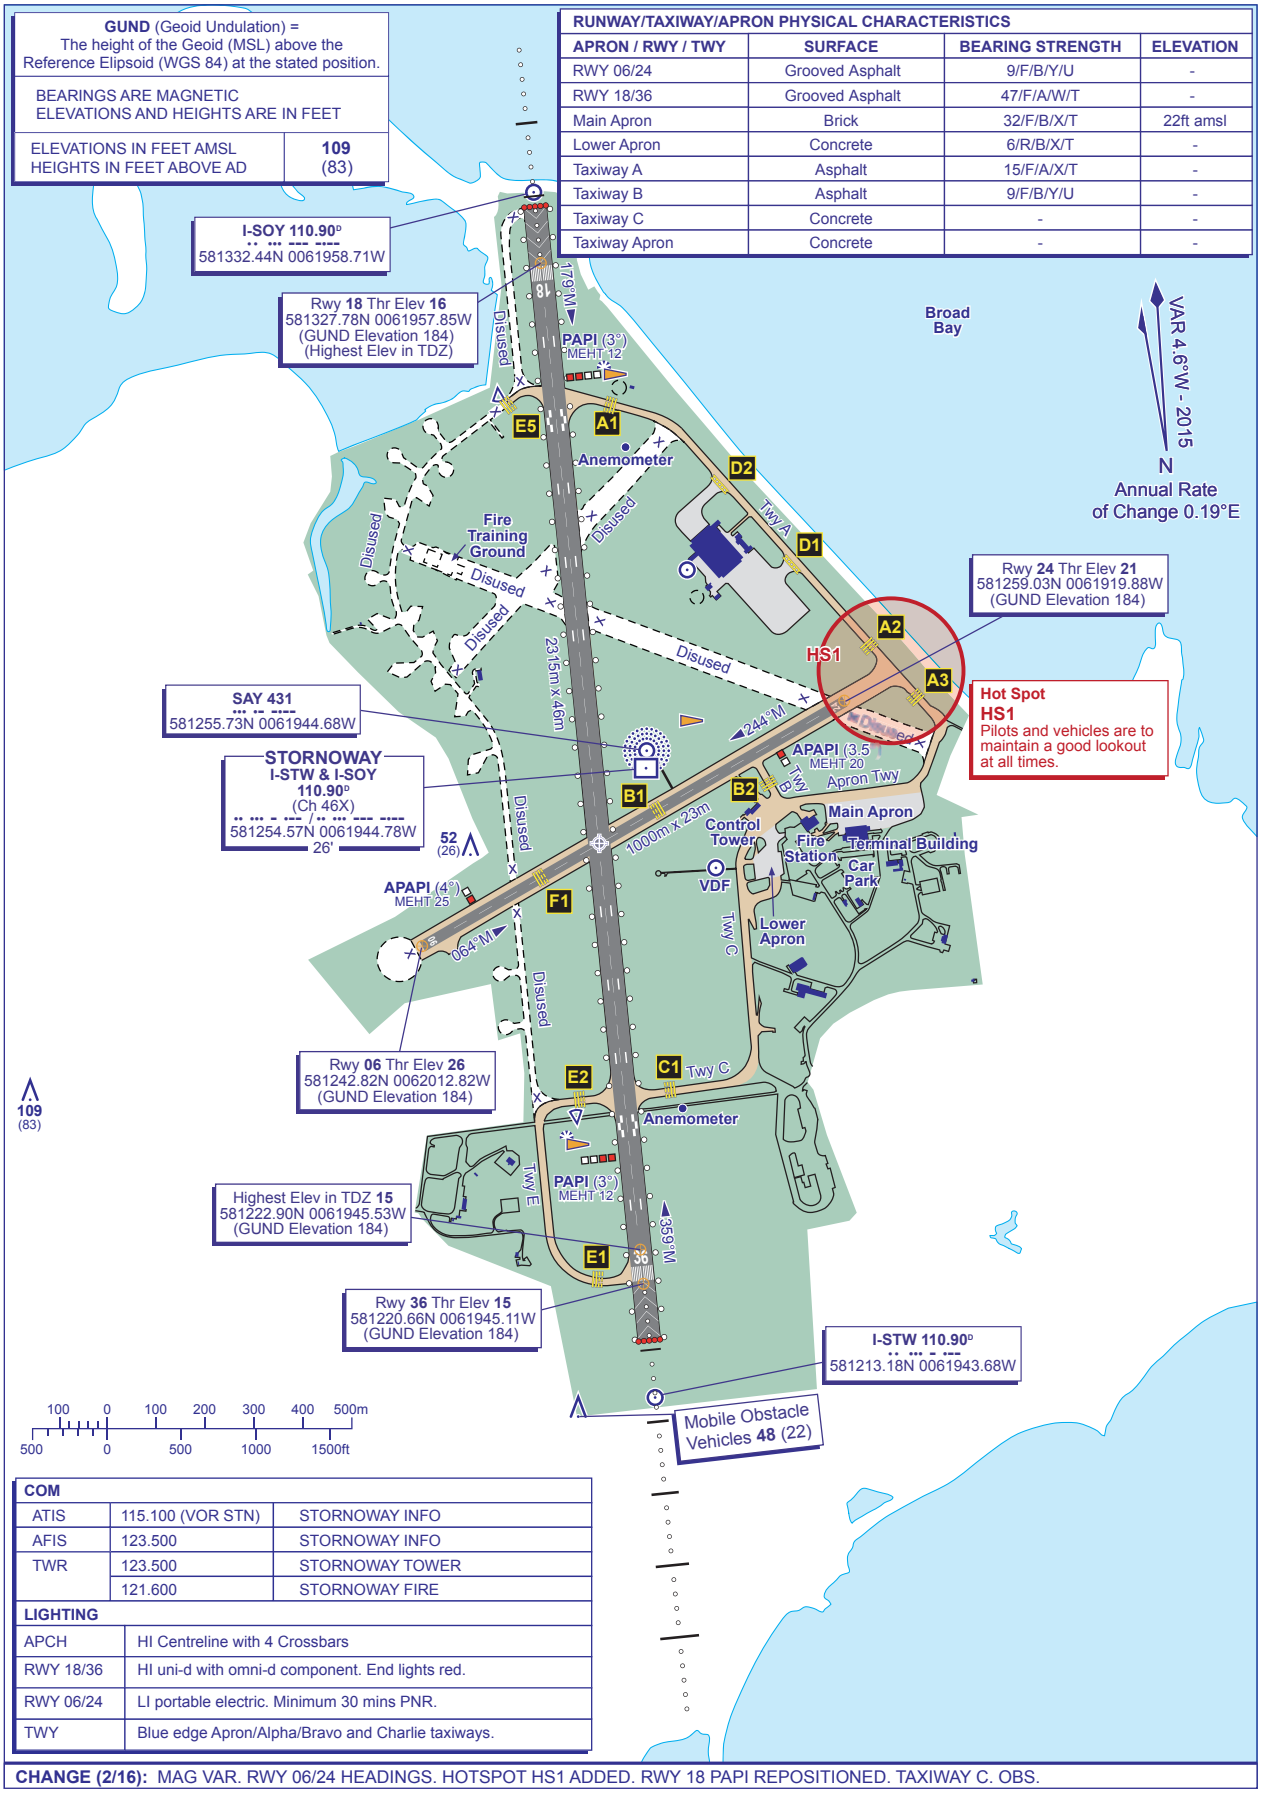

COM		
ATIS	115.100 (VOR STN)	STORNOWAY INFO
AFIS	123.500	STORNOWAY INFO
TWR	123.500	STORNOWAY TOWER
	121.600	STORNOWAY FIRE

LIGHTING	
APCH	HI Centreline with 4 Crossbars
RWY 18/36	HI uni-d with omni-d component. End lights red.
RWY 06/24	LI portable electric. Minimum 30 mins PNR.
TWY	Blue edge Apron/Alpha/Bravo and Charlie taxiways.

CHANGE (2/16): MAG VAR. RWY 06/24 HEADINGS. HOTSPOT HS1 ADDED. RWY 18 PAPI REPOSITIONED. TAXIWAY C. OBS.

AERO INFO DATE 19 NOV 15