INSTRUMENT APPROACH CHART - ICAO

TIREE
RNAV (GNSS)
RWY 05
(ACFT CAT A,B)

4 2 MSA 25NM ARP	AFIS 122.700	TIREE INFORMATION	AD ELEVATION 38
			THR ELEVATION 30
			OBSTACLE ELEVATION 530 AMSL (500) (ABOVE THR)
			BEARINGS ARE MAGNETIC

EGNOS CH 79425 E05A
TRANSITION ALTITUDE 3000

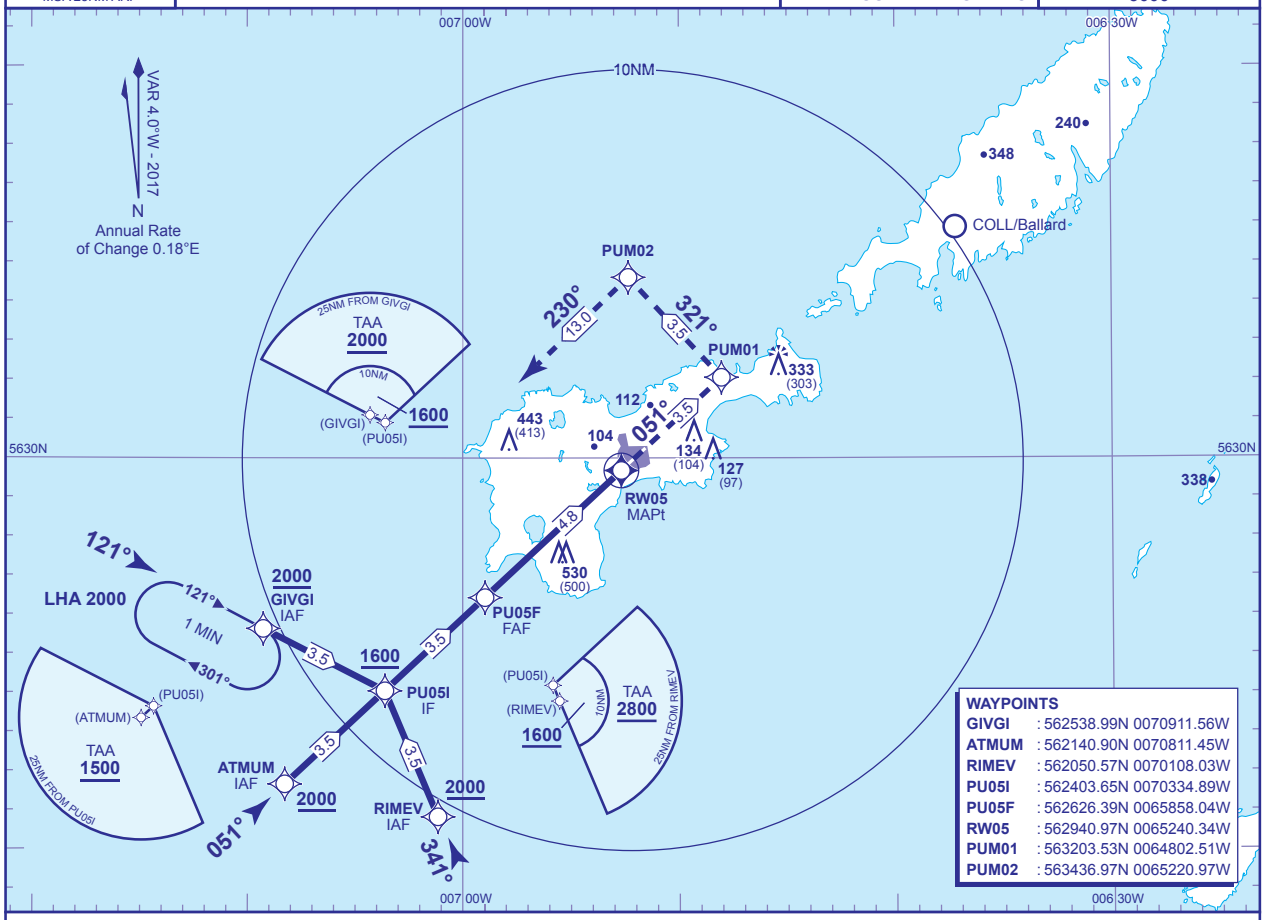

RECOMMENDED PROFILE LPV - VERTICAL PATH ANGLE 3.0° (LNAV 5.2% 320FT/NM)

NM to RW05	4	3	2	1
ALT(HGT)	**1350**(1320)	**1040**(1010)	**720**(690)	**400**(370)

TCH 50

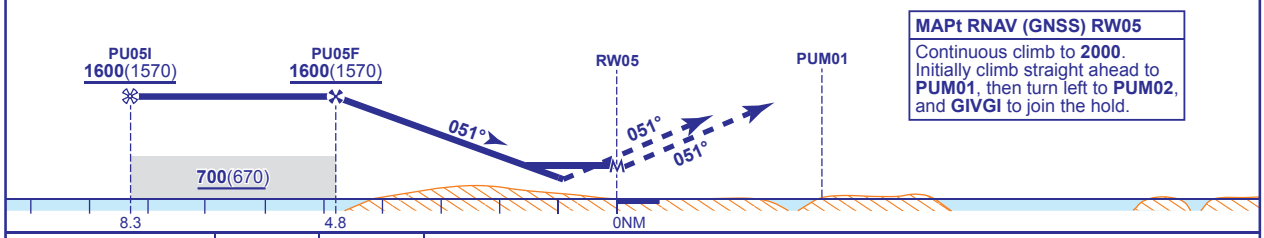

MAPt RNAV (GNSS) RW05
Continuous climb to **2000**. Initially climb straight ahead to **PUM01**, then turn left to **PUM02**, and **GIVGI** to join the hold.

Aircraft Category		A	B
OCA (OCH)	LPV	**330**(300)	**330**(300)
	LNAV	**680**(650)	**680**(650)
VM(C)OCA (OCH AAL)	Total Area	**470**(432)	**600**(562)

NOTES
1. Use of RNAV procedures at this aerodrome restricted to Highlands and Islands Airports Ltd - Approved Operators only.
2. Use of this procedure is strictly PPR from the aerodrome operator.
3. Prior to commencing the procedure, pilots are to broadcast on AFIS 122.700 with flight details and intentions.

CHANGE (9/16): MAG VAR. MAG TRACKS. EGNOS CHANNEL.

AERO INFO DATE 03 JUN 16