

INSTRUMENT APPROACH CHART - ICAO

PLAN VIEW SCALE: 1:350 000


ÅLESUND

VIGRA


RNAV(GNSS) Z RWY 06

TRANSITION ALTITUDE
7000

ATIS: 128.650	AD ELEV: 70	
APP : 129.325	THR ELEV: 35	DIST IN NM
TWR: 118.100	HGT RELATED TO THR RWY 06	ELEV, ALT AND HGT IN FT
CIRCLING HGT RELATED TO AD ELEV		
BEARINGS ARE MAGNETIC - VAR 0.5 ° E (2015)		

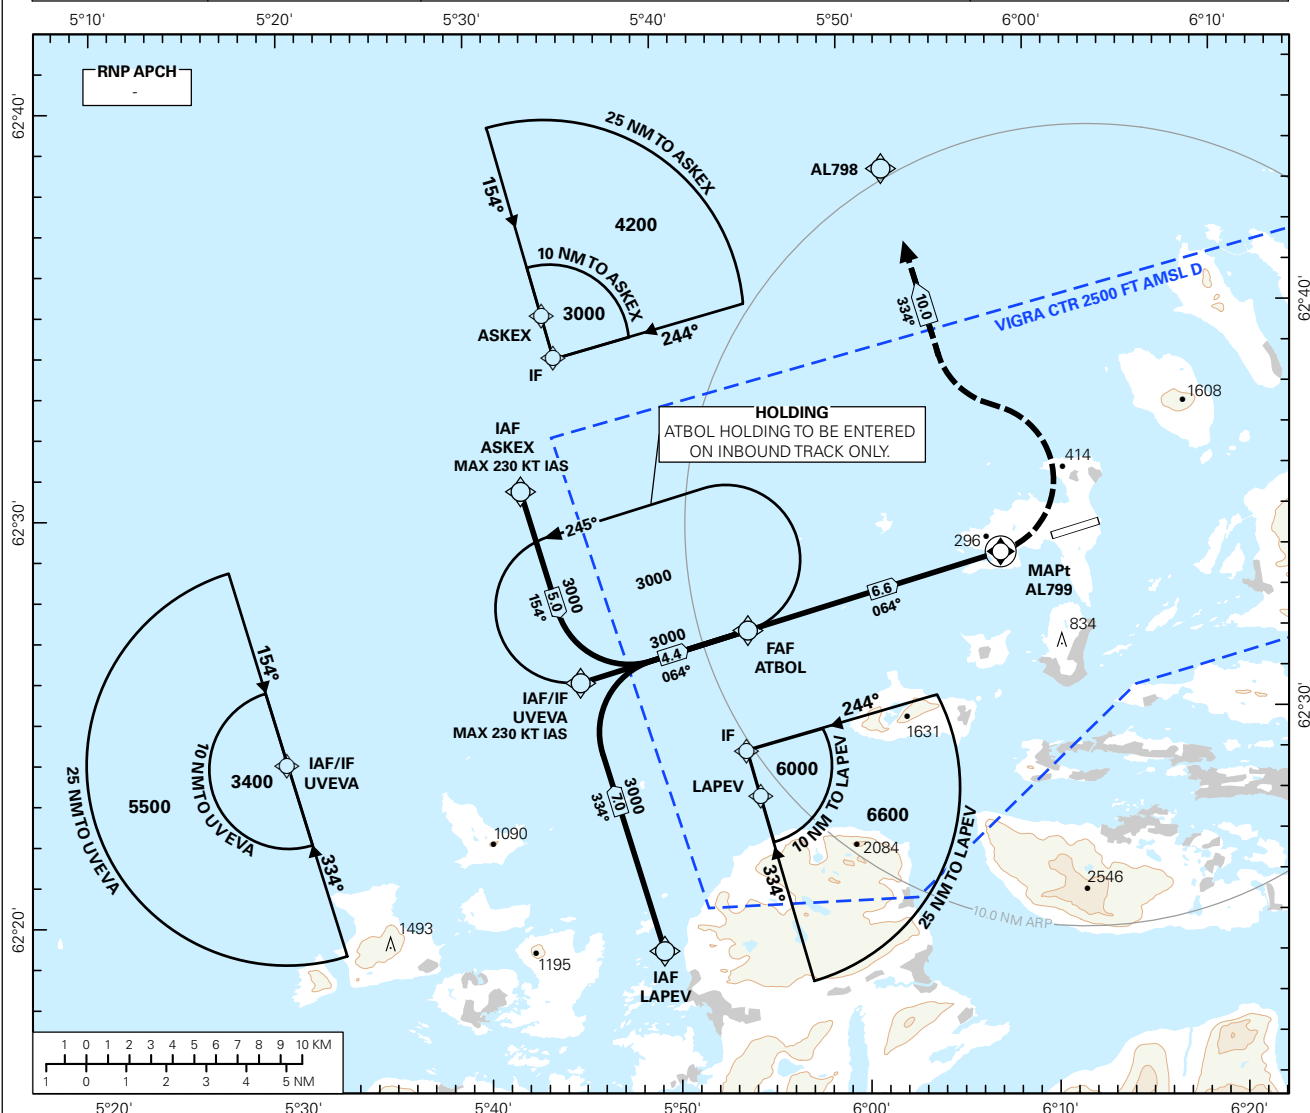

DIST TO AL799	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	2790 (2755)	2420 (2385)	2060 (2025)	1690 (1655)	1330 (1295)	960 (925)

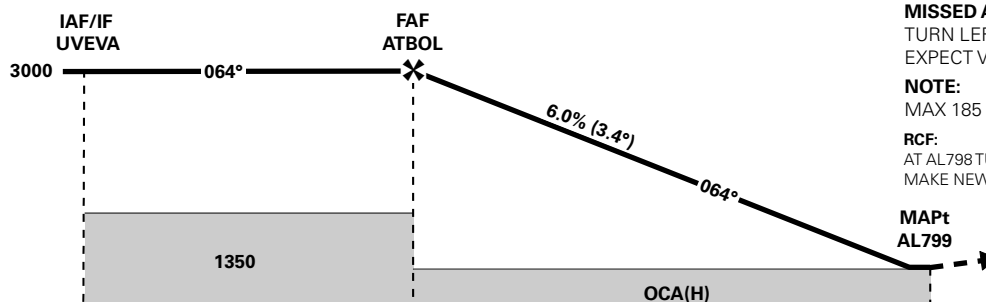

MISSED APCH:
TURN LEFT TO AL798 CLIMBING TO 3000.
EXPECT VECTORED.

NOTE:
MAX 185 KT IAS IN INITIAL TURN.

RCF:
AT AL798 TURN LEFT DCT ASKEX.
MAKE NEW APCH.

MAPt
AL799

11.0 12.4		6.6 8.0		0 1.4		0		← AL799 ← THR				
CAT OF ACFT		A	B	C	D	FINAL APCH	DIST FAF - MAPt: 6.6 NM					
OCA (H) STRAIGHT - IN	LNAV	600 (565)										
		-	-	-	-	SPEED	KT	70	90	120	150	180
		-	-	-	-	TIME	MIN:SEC	05:55	04:36	03:27	02:46	02:18
CIRCLING		760 (690)		2060 (1990)		ROD	FT/MIN	425	545	730	910	1095
NOTE: CAT B,D CIRCLING N OF AD ONLY												

NOTE: CAT B,D CIRCLING N OF AD ONLY.

CHANGES: EDITORIALS.

Avinor

10 NOV 2016

RECOMMENDED RNAV PROCEDURE CODING

ENAL RNAV Z (GNSS) RWY 06										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	LAPEV	-	-	-	-	-	A5000+	-	-
020	TF	UVEVA	-	334 (334.4)	-	7.0	-	A3000+	K230-	-
030	IF	ASKEX	-	-	-	-	-	A3000+	K230-	-
040	TF	UVEVA	-	154 (154.2)	-	5.0	-	A3000+	-	-
050	IF	UVEVA	-	-	-	-	-	A3000+	K230-	-
060	TF	ATBOL	-	064 (064.2)	-	4.4	-	A3000+	-	-
070	TF	AL799	Y	064 (064.4)	-	6.6	-	-	-	-
080	TF	AL798	-	334 (334.6)	-	10.0	L	A3000	K185-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: ATBOL holding not included in standard APCH transitions.