



ANDØYA

	ATIS: 136.125	AD ELEV: 46		ANDØYA ANDENES RNAV(GNSS) RWY 14 TRANSITION ALTITUDE 7000
	TWR: 118.200 118.700	THR ELEV: 26	DIST IN NM	
	122.100	HGT RELATED TO THR RWY 14	ELEV, ALT AND HGT IN FT	
	VDF: 118.700	CIRCLING HGT RELATED TO AD ELEV		
		BEARINGS ARE MAGNETIC - VAR 6.3 ° E (2015)		

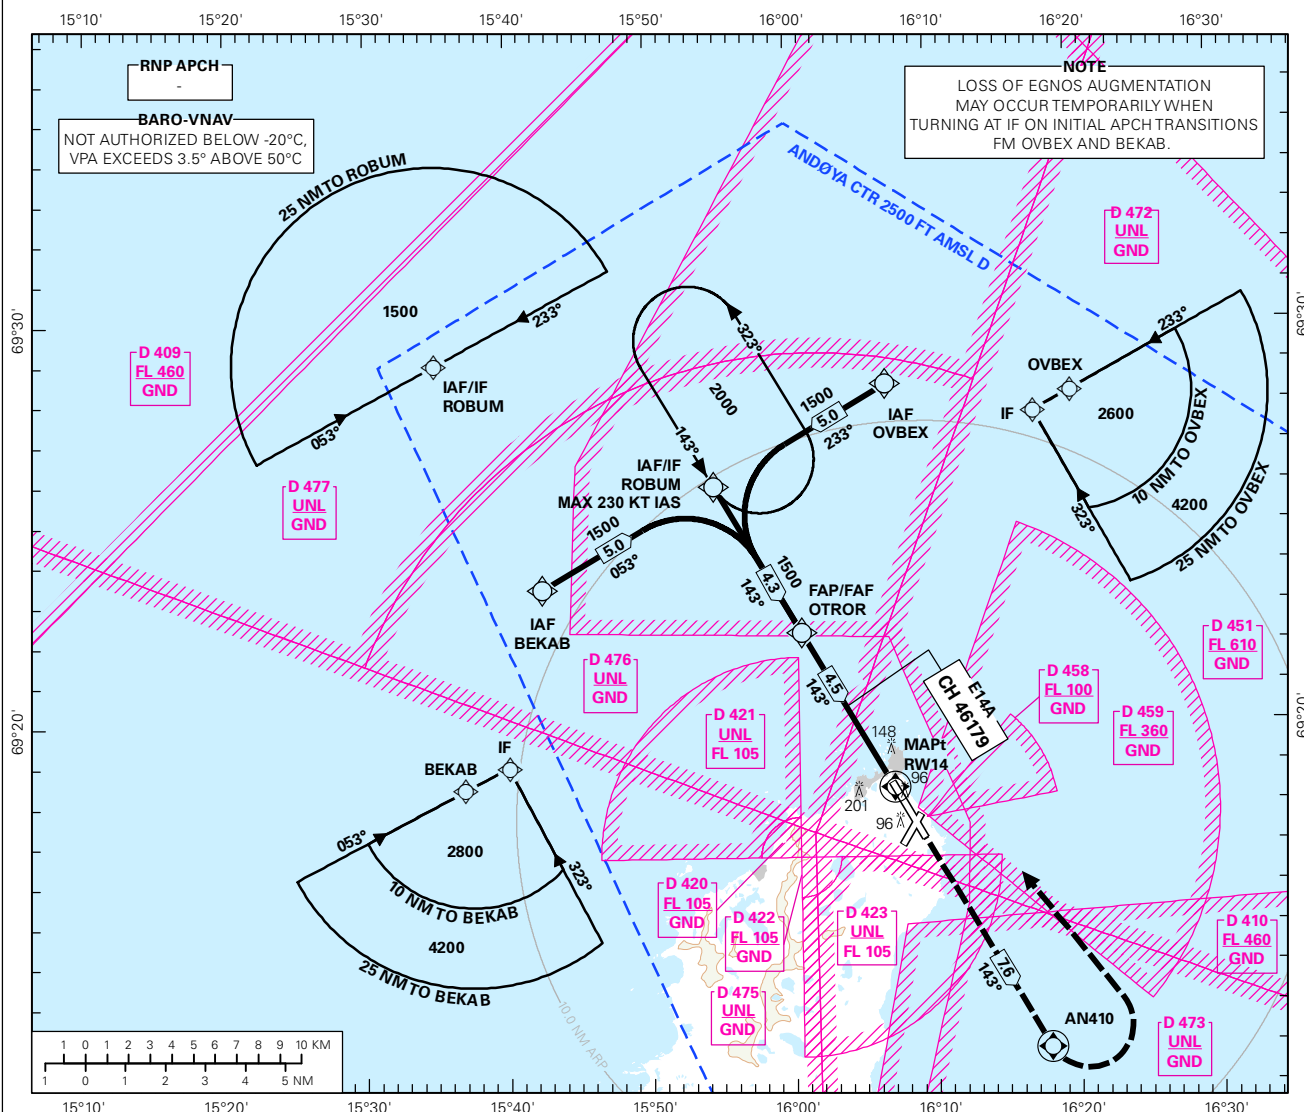

DIST TO RW14	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	-	-	1350 (1324)	1030 (1004)	710 (684)	400 (374)

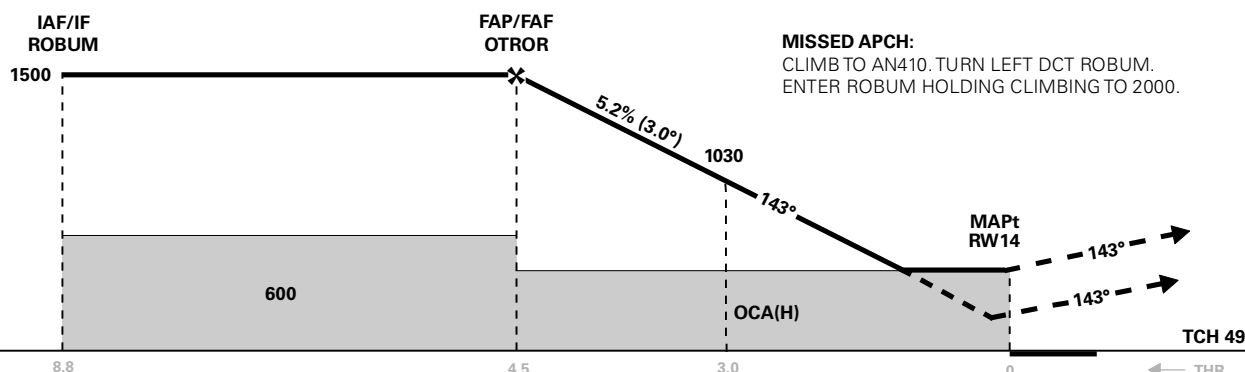

CAT OF ACFT		A	B	C	D	FINAL APCH	DIST FAF - RW14: 4.5					
OCA(H) STRAIGHT - IN	LPV	230 (204)	240 (214)	250 (224)	260 (234)		SPEED	KT	70	90	120	150
	LNAV/VNAV	340 (314)				TIME		MIN:SEC	03:52	03:00	02:15	01:48
	LNAV	400 (374)					ROD	FT/MIN	370	475	635	790
CIRCLING		500 (454)	1540 (1494)	1740 (1694)	1930 (1884)							

NOTE: NO CIRCLING W OF AD BETWEEN RWY 03 and RWY 14.

CHANGES: EDITORIALS.

RECOMMENDED RNAV PROCEDURE CODING

ENAN RNAV(GNSS) RWY 14										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	OVBEY	-	-	-	-	-	A2600+	-	-
020	TF	ROBUM	-	233 (239.7)	-	5.0	-	A1500+	K230-	-
010	IF	BEKAB	-	-	-	-	-	A2800+	-	-
020	TF	ROBUM	-	053 (059.4)	-	5.0	-	A1500+	K230-	-
010	IF	ROBUM	-	-	-	-	-	A1500+	K230-	-
020	TF	OTROR	-	143 (149.5)	-	4.3	-	A1500+	-	-
030	TF	RW14	Y	143 (149.6)	-	4.5	-	-	-	-
040	TF	AN410	Y	143 (149.7)	-	7.6	-	-	-	-
050	DF	ROBUM	-	-	-	-	L	A2000	-	-
060	HM	ROBUM	-	143 (149.5)	-	1 MIN	L	A2000+	-	-

Note: Recommended RNAV procedure coding is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: The use of SBAS/GNSS geometric altitude as a source of altitude for approaches to LNAV/VNAV minima is permitted only for aircraft specifically certified for this type of operation. See "EASA-CM-AS-002 Clarifications to AMC 20-27" for additional information.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.

Note: ROBUM holding not included in standard APCH transitions.

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	43.5
SBAS Provider	1	FPAP latitude	691709.0275N
Airport Identifier	ENAN	FPAP longitude	0160917.2470E
Runway	RW14	Threshold crossing height	15
Approach performance designator	0	TCH units	M
Route Indicator	-	Glide path angle	3.0
Reference path data selector	0	Course width at threshold	105
Reference path Identifier	E14A	Length offset	0
LTP/FTP latitude	691825.3500N	Horizontal alert limit (HAL)	40
LTP/FTP longitude	0160711.4365E	Vertical alert limit (VAL)	50
PRECISION APPROACH PATH CRC REMAINDER		4CD56EB6	

NON FAS DATA BLOCK FIELDS

LTP Ortometric Height	8.0
FPAP Ortometric Height	8.0