

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE:1:350 000


ALTA

ALTA

RNAV(GNSS) - A

TRANSITION ALTITUDE
7000


5₀ MSA 25 NM ARP	ATIS: 118.175	AD ELEV: 10	
	APP: 120.400		DIST IN NM
	TWR: 120.400 118.100		ELEV, ALT AND HGT IN FT
		CIRCLING HGT RELATED TO AD ELEV	
		BEARINGS ARE MAGNETIC - VAR 10.6 ° E (2015)	

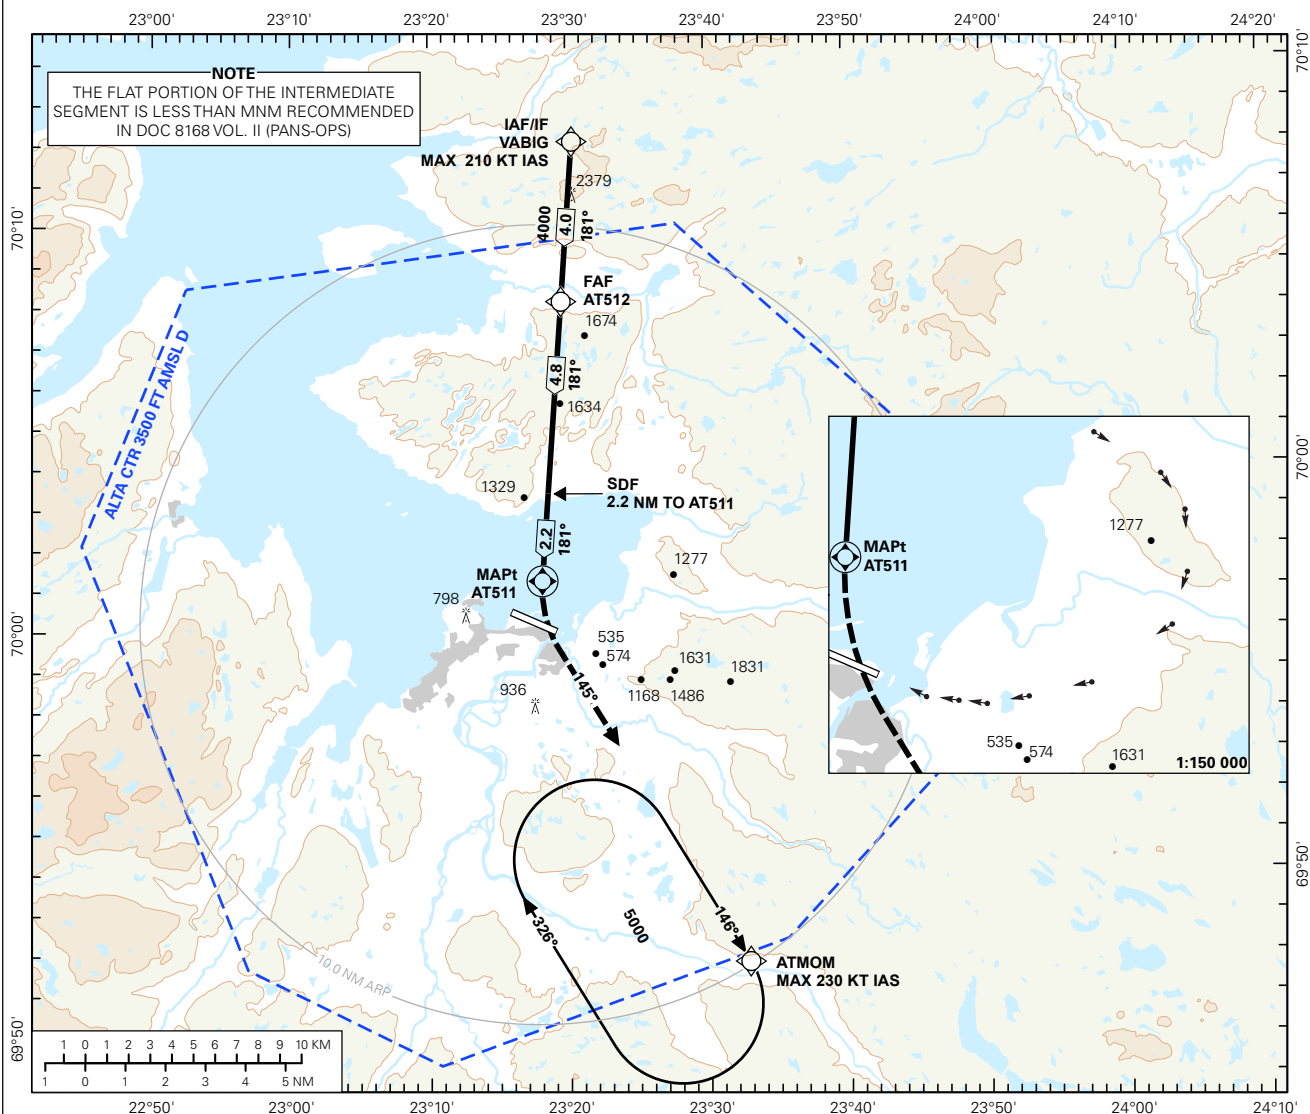

DIST TO AT511	7	6	5	4	3	2	1	0
ALT (HGT)	4000 (3990)	3600 (3590)	3190 (3180)	2780 (2770)	2370 (2360)	1960 (1950)	1550 (1540)	1150 (1140)

MISSED APCH:
INTERCEPT AND CLIMB ON COURSE 145° TO ATMOM.
ENTER ATMOM HOLDING CLIMBING TO 5000.

NOTE:
DESCENT GRADIENT CALCULATED FM FAF TO MAPt.

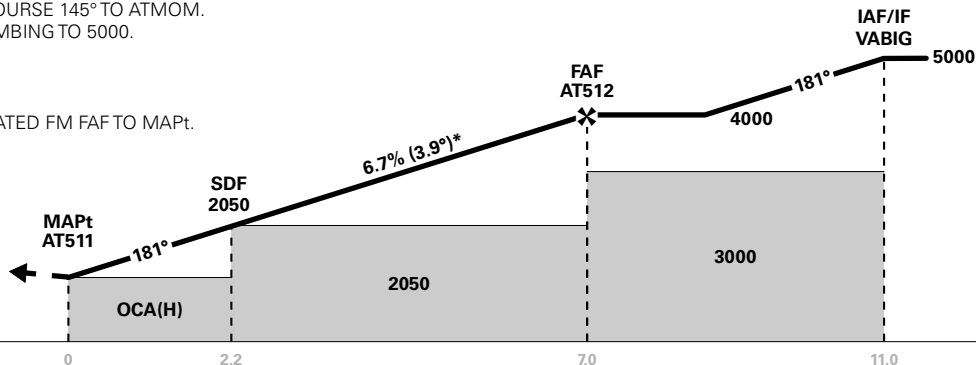

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 7.0					
OCA(H)	-	-	-	-	SPEED	KT	70	90	120	150	180
STRAIGHT - IN	-	-	-	-	TIME	MIN:SEC	06:00	04:40	03:30	02:48	02:20
CIRCLING	1150 (1140)*	1520 (1510)*	2080 (2070)	2280 (2270)	ROD	FT/MIN	475	615	820	1020	1225

NOTE: *WHEN FOLLOWING CIRCLING LIGHTS USE CAT C MINIMUM.

CHANGES: NEW PROCEDURE.

Avinor

23 JUN 2016

RECOMMENDED RNAV PROCEDURE CODING

ENAT RNAV(GNSS)-A										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
01	IF	VABIG	-	-	-	-	-	A5000+	K210-	-
02	TF	AT512	-	181(191.7)	-	4.0	-	A4000+	-	-
02	TF	AT511	Y	181(191.6)	-	7.0	-	-	-	-
03	CF	ATMOM	-	145(156.0)	-	-	-	-	K230-	-
05	HM	ATMOM	-	146(156.2)	-	1 MIN	R	A5000	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.