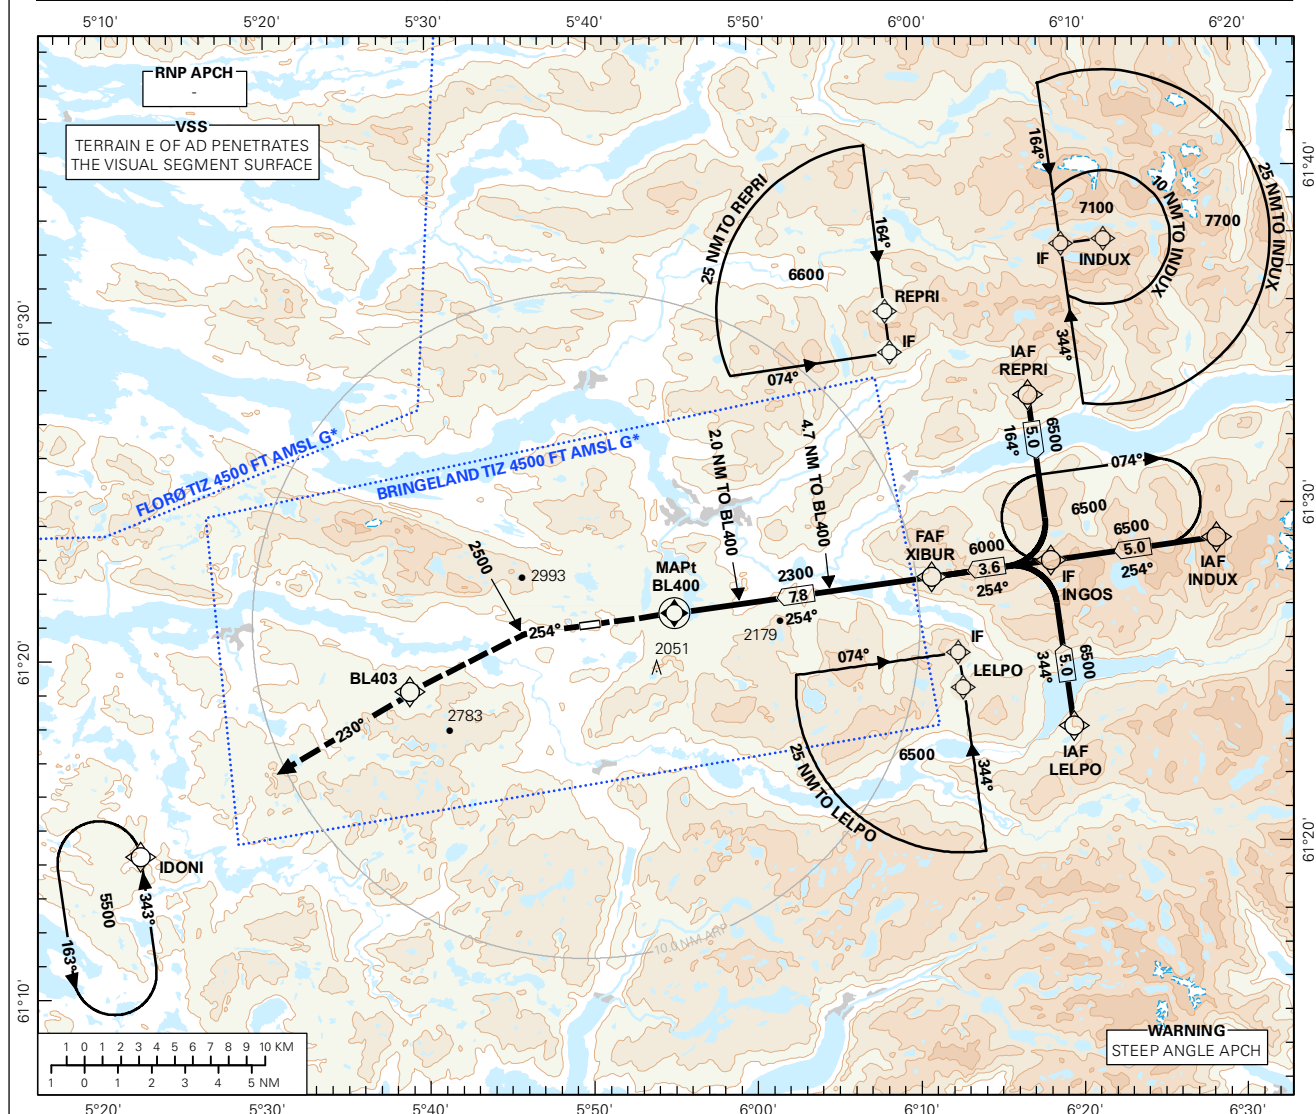


INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:420 000

FØRDE

BRINGELAND


RNAV(GNSS) Z RWY 25

TRANSITION ALTITUDE
6000

DIST TO BL400	8	7	6	5	4	3	2	1
ALT (HGT)	-	5630 (4585)	5140 (4095)	4660 (3615)	4170 (3125)	3680 (2635)	3190 (2145)	2710 (1665)

MISSED APCH:

CLIMB FROM BL400 TO 2500 ON TRACK 254°.
TURN LEFT DCT BL403 CLIMBING TO 5500.
CONTINUE TO IDONI. ENTER IDONI HOLDING
CLIMBING TO 5500.

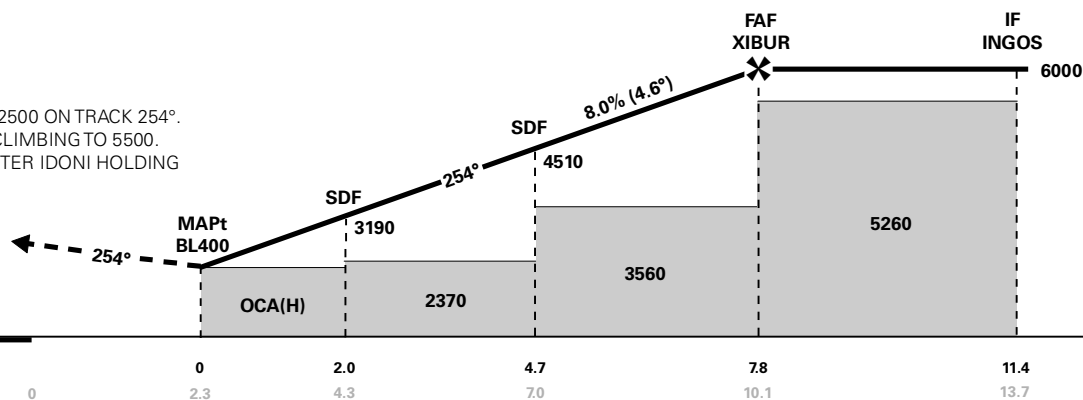

CAT OF ACFT		A	B	C	D	FINAL APCH					
OCA(H)	LNNAV	2300 (1255)	-	-	-	DIST FAF - MAPt: 7.8					
	-	-	-	-	-	SPEED	KT	70	90	100	120
CIRCLING	-	-	-	-	-	TIME	MIN:SEC	06:40	05:11	04:40	03:54
	2300 (1255)	2970 (1925)	-	-	-	ROD	FT/MIN	570	730	810	975

NOTE: CIRCLING S OF AD ONLY.

CHANGES: PROCEDURE INDICATOR.

Avinor

28 MAY 2015

RECOMMENDED RNAV PROCEDURE CODING

ENBL RNAV(GNSS) Z RWY 25										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	REPRI	-	-	-	-	-	A6600+	-	-
020	TF	INGOS	-	164 (164.2)	-	5.0	-	A6500+	-	-
010	IF	LELPO	-	-	-	-	-	A6500+	-	-
020	TF	INGOS	-	344 (344.3)	-	5.0	-	A6500+	-	-
010	IF	INDUX	-	-	-	-	-	A7100+	-	-
020	TF	INGOS	-	254 (254.4)	-	5.0	-	A6500+	-	-
030	TF	XIBUR	-	254 (254.2)	-	3.6	-	A6000+	-	-
040	TF	BL400	Y	254 (254.1)	-	7.8	-	-	-	-
050	CA	-	-	254 (253.9)	-	-	-	A2500+	-	-
060	DF	BL403	-	-	-	-	-	-	-	-
070	TF	IDONI	-	230 (230.2)	-	9.4	-	-	-	-
080	HM	IDONI	-	343 (343.4)	-	1 MIN	L	A5500	-	-

Note: Recommended RNAV procedure coding is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

| Note: INGOS holding not included in standard APCH transitions.