

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:250 000


BRØNNØYSUND

BRØNNØY


RNAV(GNSS) 086

TRANSITION ALTITUDE
7000

5₃ MSA 25 NM ARP	ATIS: 135.900	AD ELEV: 25	
	APP: 127.900	THR ELEV: 14	DIST IN NM
	AFIS: 119.600	HGT RELATED TO THR RWY 04	ELEV, ALT AND HGT IN FT
	VDF: 119.600	CIRCLING HGT RELATED TO AD ELEV	
		BEARINGS ARE MAGNETIC - VAR 3.6 ° E (2015)	

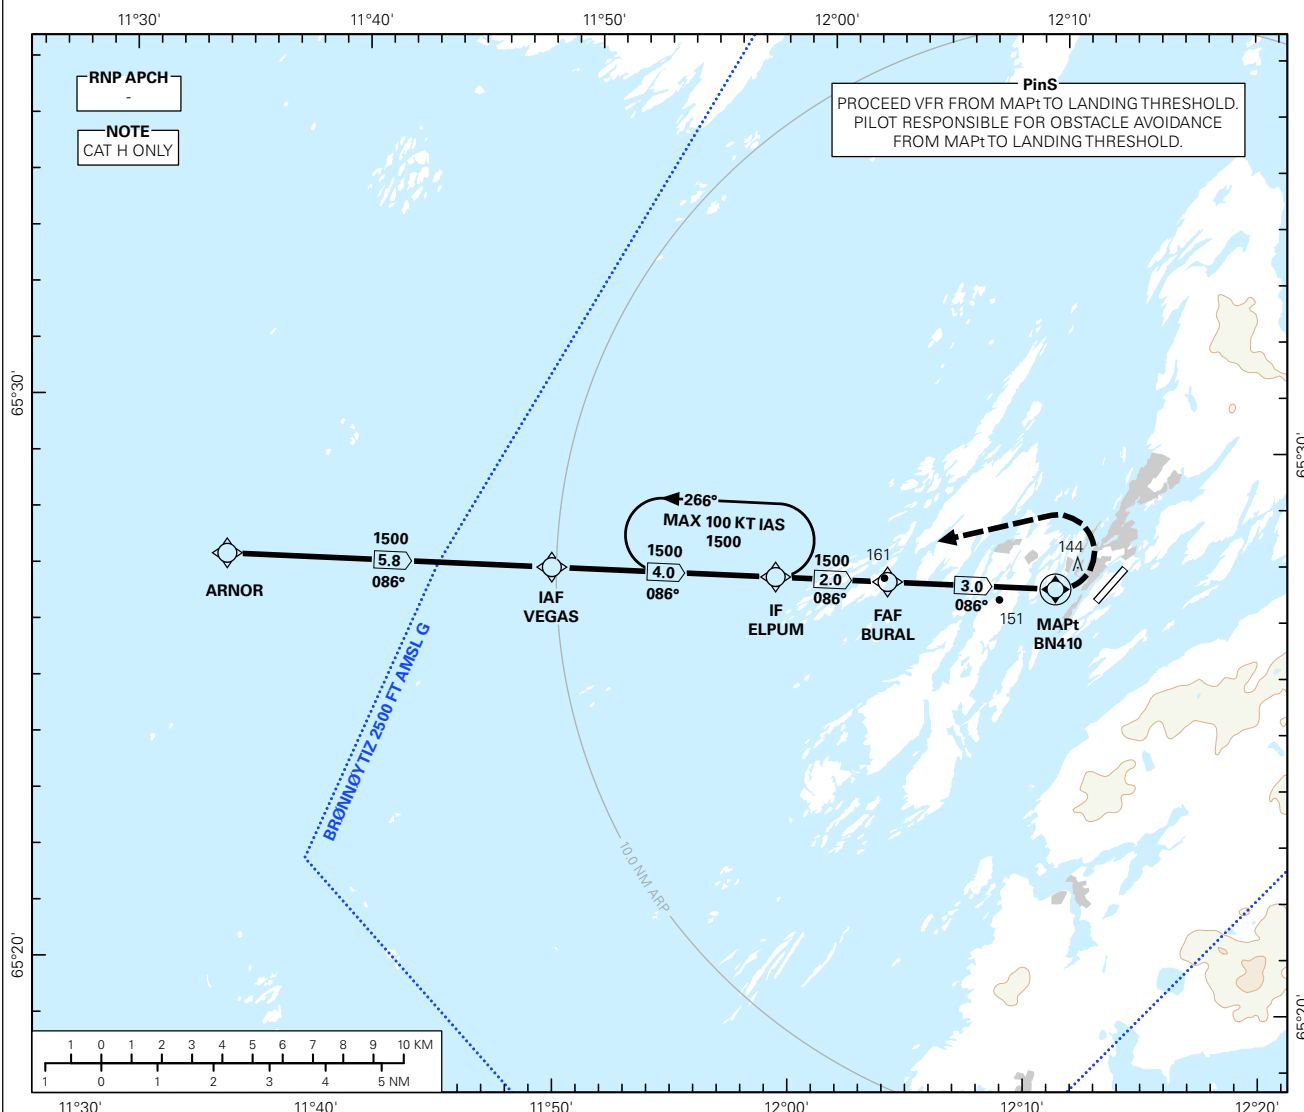

DIST TO BN410	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	-	-	-	1500 (1475)	1160 (1135)	810 (785)

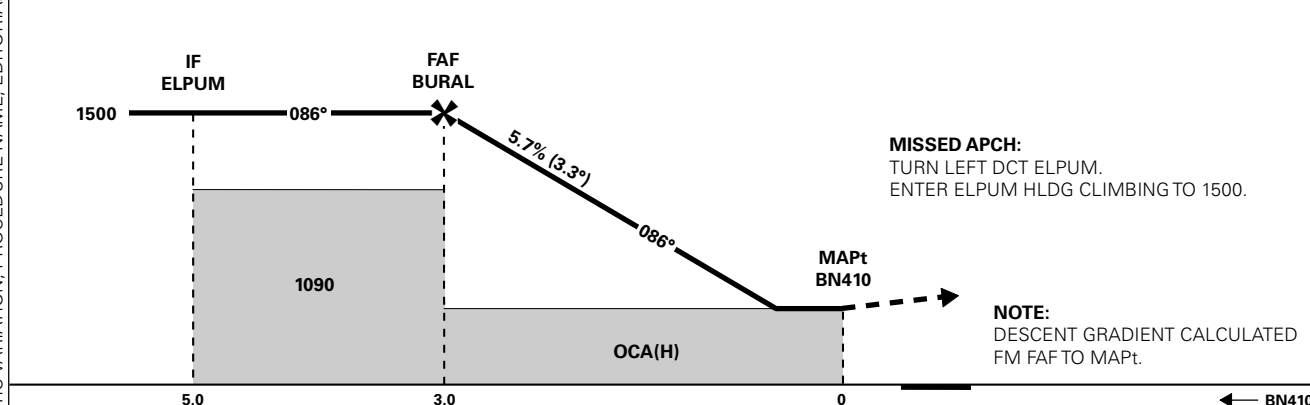

CAT OF ACFT		A	B	C	D	FINAL APCH	DIST FAF - MAPt: 3.0					
OCA(H)	LNAV 4.2%*	450 (425)	-	-	-		SPEED	KT	60	70	90	100
		-	-	-	-	TIME	MIN:SEC	03:00	02:35	02:00	01:48	01:30
		-	-	-	-	ROD	FT/MIN	350	410	525	585	700
CIRCLING		-	-	-	-							

NOTE: *MNM MISSED APCH CLIMB GRADIENT. VISUAL MANOEUVRING REQUIRED.

CHANGES: MAGNETIC VARIATION, PROCEDURE NAME, EDITORIALS

Avinor

08 DEC 2016

RECOMMENDED RNAV PROCEDURE CODING

ENBN RNAV(GNSS) 086										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	ARNOR	-	-	-	-	-	A1500+	-	-
020	TF	VEGAS	-	-	-	5.8	-	A1500+	-	-
030	TF	ELPUM	-	-	-	4.0	-	A1500+	-	-
040	TF	BURAL	-	-	-	2.0	-	A1500+	-	-
050	TF	BN410	Y	-	-	3.0	-	-	-	-
060	DF	ELPUM	-	-	-	-	L	A1500	-	-
070	HM	ELPUM	-	086 (090.0)	-	1 MIN	L	A1500+	K100-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.