


	ATIS: 135.900	AD ELEV: 25		BRØNNØYSUND BRØNNØY RNAV(GNSS) X RWY 04 TRANSITION ALTITUDE 7000
	APP: 127.900	THR ELEV: 14	DIST IN NM	
	AFIS: 119.600	HGT RELATED TO THR RWY 04	ELEV, ALT AND HGT IN FT	
	VDF: 119.600	CIRCLING HGT RELATED TO AD ELEV		
		BEARINGS ARE MAGNETIC - VAR 3.6 ° E (2015)		

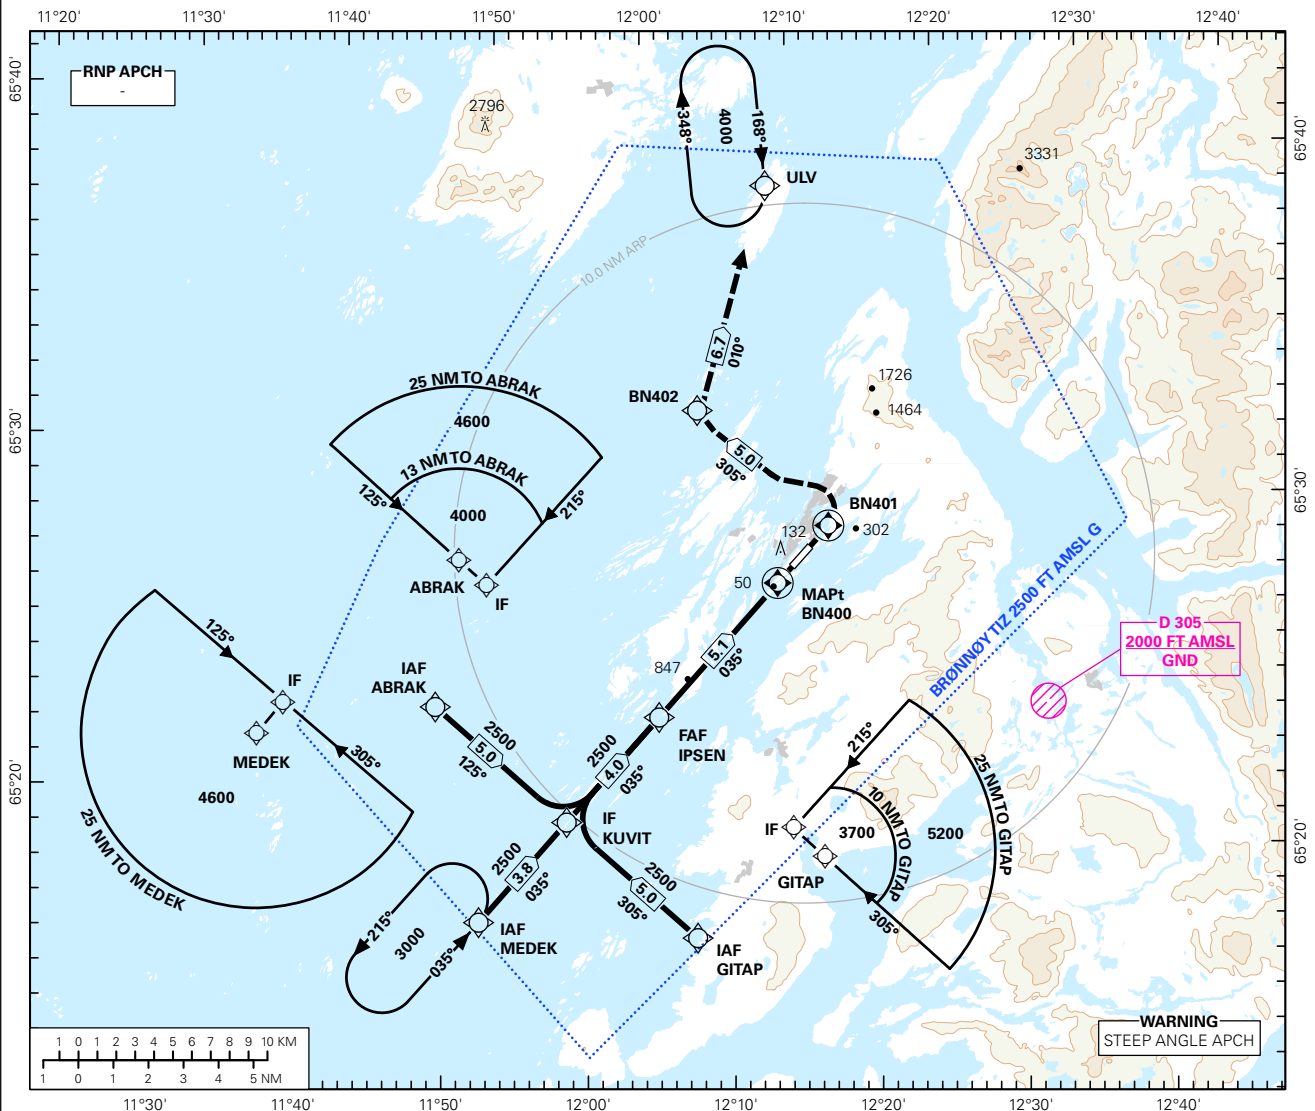


DISTO TO BN400	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	-	-	2450 (2436)	2030 (2016)	1610 (1596)	1190 (1176)

MISSED APCH:
CLIMB ON COURSE 035° TO BN401.
TURN LEFT* TO BN402, TO ULV.
FM ULV ON TRACK 010° TO 2700.
TURN LEFT DCT ULV. ENTER ULV
HLDG CLIMBING TO 4000.

NOTE:
*MAX 130 KT IAS DURING FIRST MISSED APCH TURN.

NOTE:
ACFT REACHING 2700 BEFORE ULV,
MAY ENTER ULV HLDG.

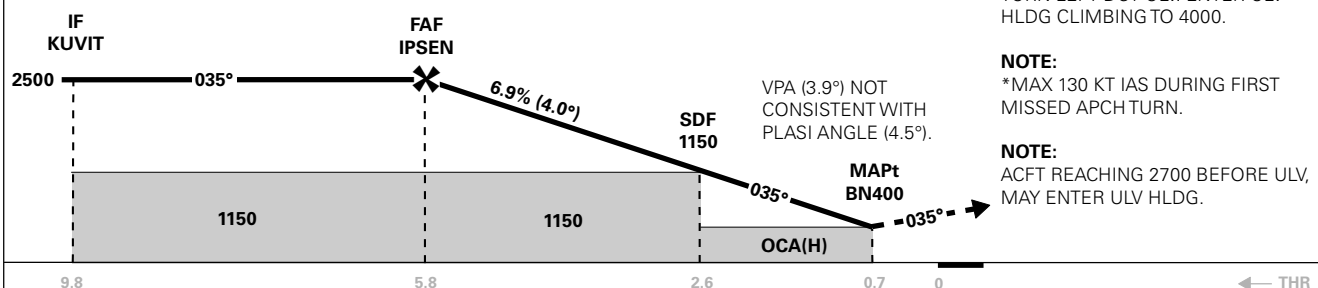

CAT OF ACFT		A	B	C	D	FINAL APCH	DIST FAF - MAPt: 5.1					
OCA(H) STRAIGHT - IN	LNAV 2.5%*	810 (796)	830 (816)	-	-		SPEED	KT	70	90	100	120
	LNAV 3.5%*	520 (506)	550 (536)	-	-	TIME		MIN:SEC	04:24	03:25	03:05	02:34
	LNAV 4.3%*	350 (336)		-	-		ROD	FT/MIN	490	630	700	840
CIRCLING		810 (785)	830 (805)	-	-							

NOTE: CIRCLING W OF AD ONLY. *MNM MISSED APCH CLIMB GRADIENT.

CHANGES: PROCEDURE NAME, EDITORIALS.

RECOMMENDED RNAV PROCEDURE CODING

ENBN RNAV(GNSS) X RWY 04										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	ABRAK	-	-	-	-	-	A2500+	-	-
020	TF	KUVIT	-	-	-	5.0	-	A2500+	-	-
010	IF	GITAP	-	-	-	-	-	A2500+	-	-
020	TF	KUVIT	-	-	-	5.0	-	A2500+	-	-
010	IF	MEDEK	-	-	-	-	-	A2500+	-	-
020	TF	KUVIT	-	-	-	3.8	-	A2500+	-	-
030	TF	IPSEN	-	-	-	4.0	-	A2500+	-	-
040	TF	BN400	Y	-	-	5.1	-	-	-	-
050	TF	BN401	Y	-	-	2.2	-	A2700	-	-
060	TF	BN402	-	-	-	5.0	L	A2700	K130-	-
070	TF	ULV	-	-	-	6.7	-	A2700	-	-
080	CA	-	-	011 (014.1)	-	-	-	A2700	-	-
090	DF	ULV	-	-	-	-	L	A4000	-	-
100	HM	ULV	-	168 (171.8)	-	1 MIN	R	A4000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.