

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

BÅTSFJORD

BÅTSFJORD

RNAV(GNSS) RWY 03

TRANSITION ALTITUDE
7000

AFIS: 123.400

AD ELEV: 490

VDF: 123.400


THR ELEV: 480

DIST IN NM


HGT RELATED TO THR RWY 03 ELEV, ALT AND HGT IN FT

CIRCLING HGT RELATED TO AD ELEV

BEARINGS ARE MAGNETIC - VAR 14.4 ° E (2015)

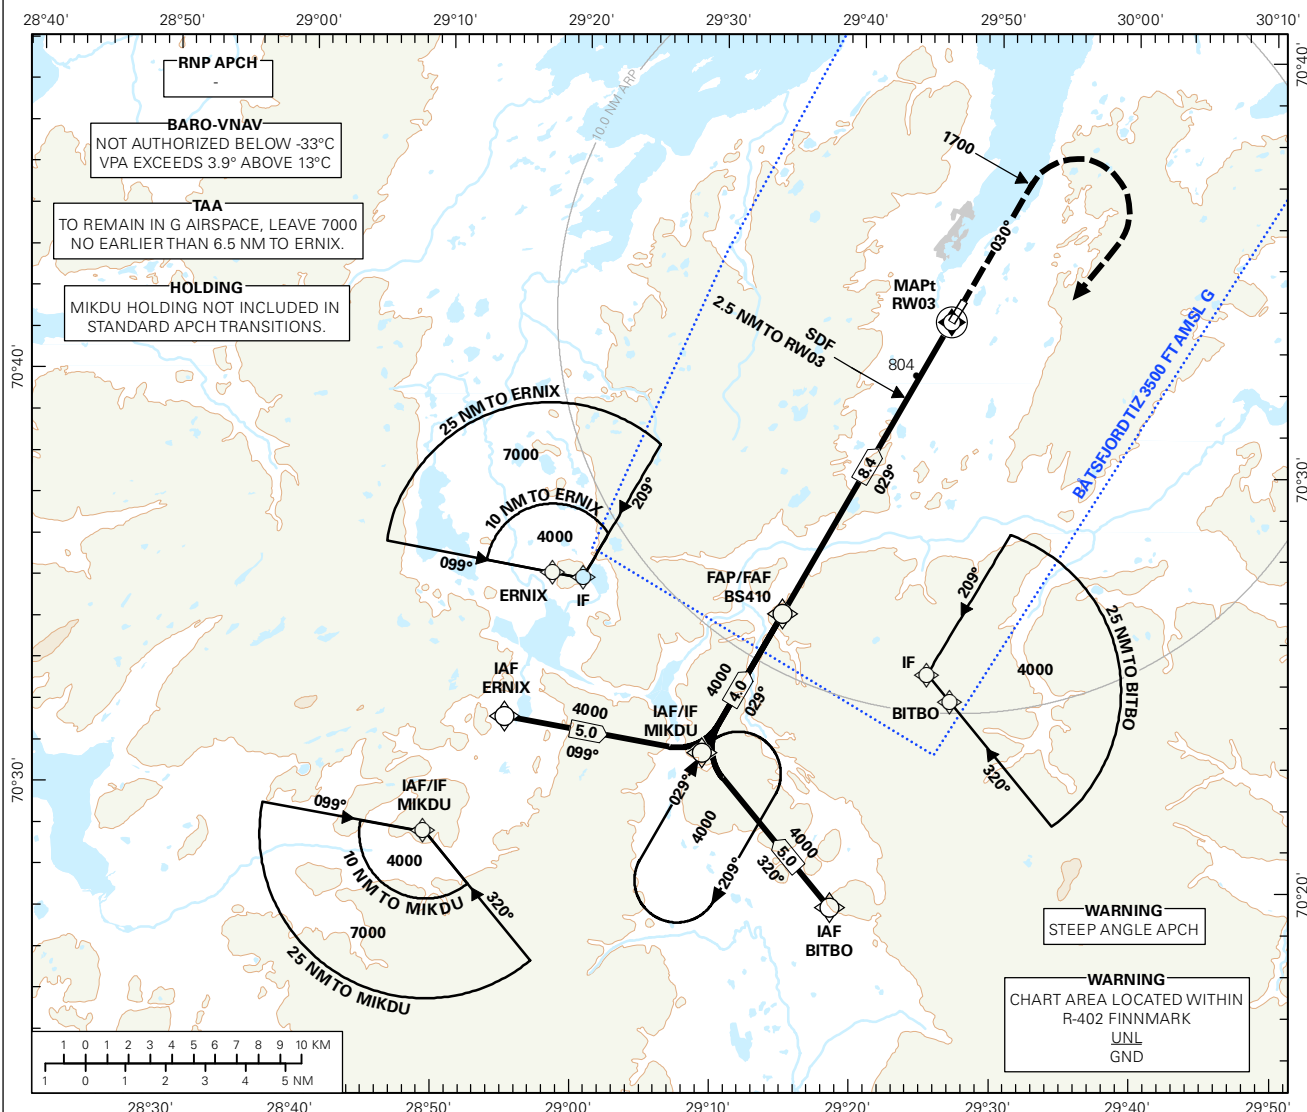

DIST TO RWY03	9	8	7	6	5	4	3	2
ALT (HGT)	-	3840 (3360)	3430 (2950)	3010 (2530)	2600 (2120)	2190 (1710)	1770 (1290)	1360 (880)

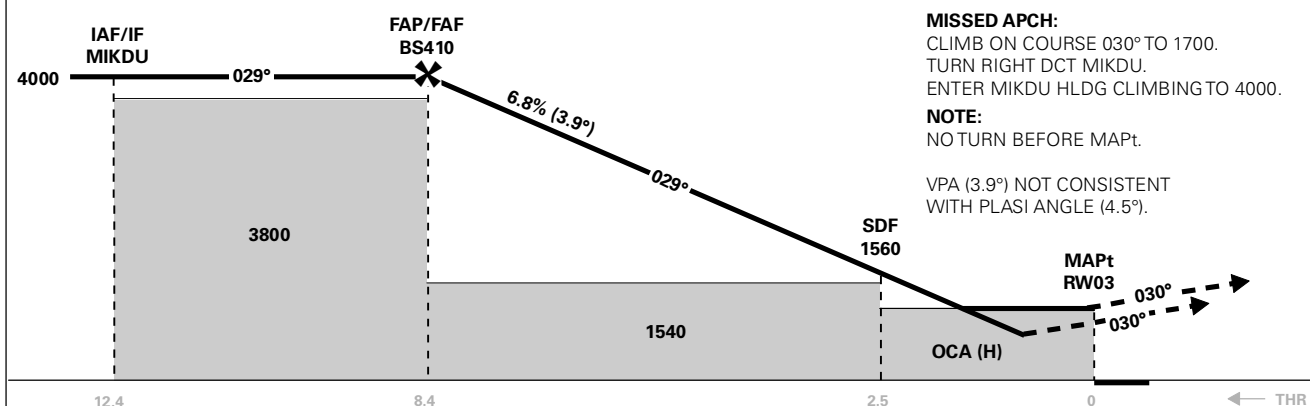

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 8.4
OCA(H)	1000 (520)	1020 (540)	-	-	SPEED	KT
STRAIGHT - IN	1220 (740)	-	-	-	TIME	MIN:SEC
CIRCLING	1220 (730)	1510 (1020)	-	-	ROD	FT/MIN

NOTE: CIRCLING E OF AD ONLY.

CHANGES: COMPLETE REVISION.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENBS RNAV(GNSS) RWY 03										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	ERNIX	-	-	-	-	-	A4000+	-	-
020	TF	MIKDU	-	-	-	5.0	-	A4000+	-	-
010	IF	BITBO	-	-	-	-	-	A4000+	-	-
020	TF	MIKDU	-	-	-	5.0	-	A4000+	-	-
010	IF	MIKDU	-	-	-	-	-	A4000+	-	-
020	TF	BS410	-	-	-	4.0	-	A4000+	-	-
030	TF	RW03	Y	-	-	8.4	-	-	-	3.9/15
040	CA	-	-	030 (044.0)	-	-	-	A1700+	-	-
050	DF	MIKDU	-	-	-	-	R	A4000	-	-
060	HM	MIKDU	-	029 (043.6)	-	1 MIN	R	A4000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.

Note: MIKDU holding not included in standard APCH transitions.