



INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE:1:350 000

	AFIS: 120.100	AD ELEV: 43		BERLEVÅG BERLEVÅG RNAV(GNSS) RWY 06 TRANSITION ALTITUDE 7000
	VDF: 120.100	THR ELEV: 43	DIST IN NM	
		HGT RELATED TO THR RWY 06	ELEV, ALT AND HGT IN FT	
		CIRCLING HGT RELATED TO AD ELEV		
		BEARINGS ARE MAGNETIC - VAR 14.2 ° E (2015)		

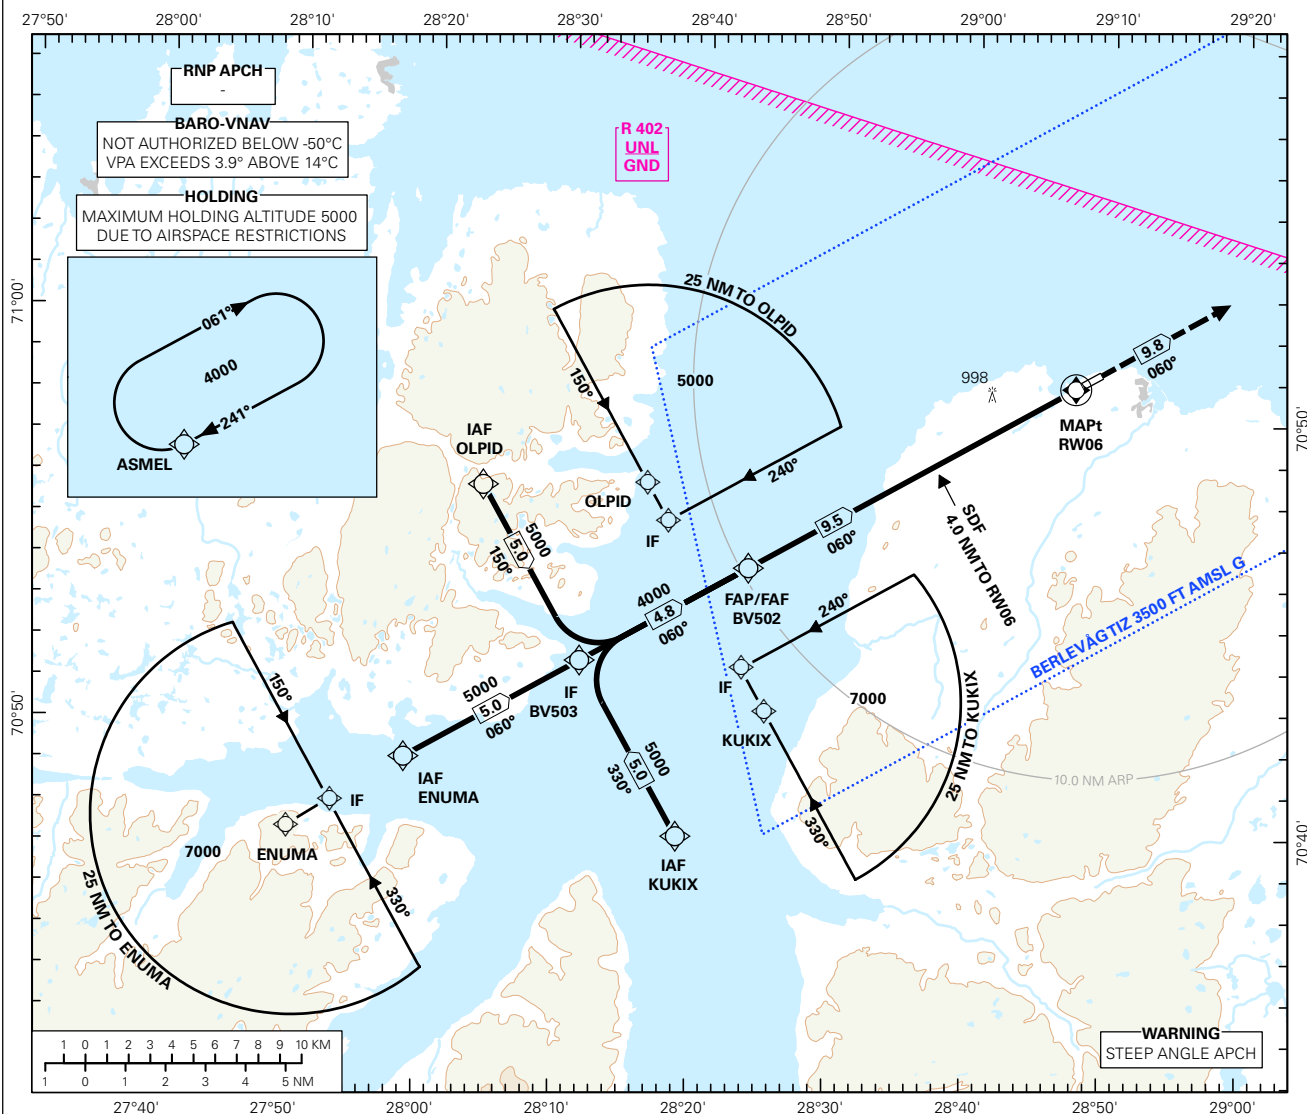

DIST TO RWY06	10	9	8	7	6	5	4	3
ALT (HGT)	-	3800 (3757)	3390 (3347)	2980 (2937)	2570 (2527)	2150 (2107)	1740 (1697)	1330 (1287)

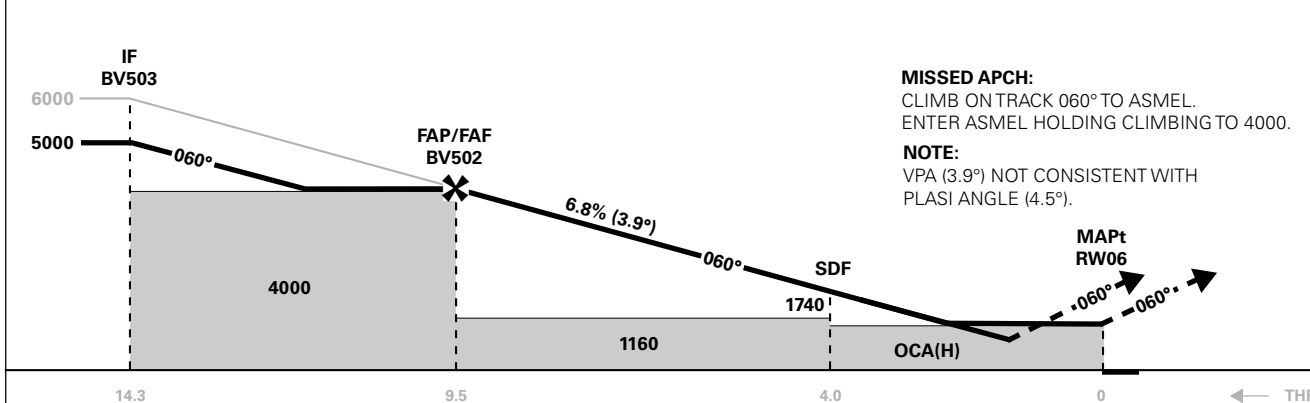

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 9.5					
OCA(H)	1020 (977)	-	-	-	SPEED	KT	70	90	100	120	130
STRAIGHT - IN	1030 (987)	-	-	-	TIME	MIN:SEC	08:09	06:20	05:42	04:45	04:24
CIRCLING	1040 (997)	1290 (1243)	-	-	ROD	FT/MIN	480	615	685	825	890
	-	1150 (1107)*	-	-							

NOTE: *CIRCLING S OF AD ONLY.

CHANGES: COMPLETE REVISION.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENBV RNAV(GNSS) RWY 06										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	KUKIX	-	-	-	-	-	A7000+	-	-
020	TF	BV503	-	-	-	-	-	A5000+	-	-
010	IF	OLPID	-	-	-	-	-	A5000+	-	-
020	TF	BV503	-	-	-	5.0	-	A5000+	-	-
010	IF	ENUMA	-	-	-	-	-	A7000+	-	-
020	TF	BV503	-	-	-	5.0	-	A5000+	-	-
030	TF	BV502	-	-	-	4.8	-	A4000+	-	-
040	TF	RW06	Y	-	-	9.5	-	-	-	-3.9/15
050	TF	ASMEL	-	-	-	9.8	-	A4000	-	-
060	HM	ASMEL	-	241 (255.2)	-	1 MIN	R	A4000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.