


INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE:1:250 000

BERLEVÅG

BERLEVÅG

LOC RWY 24

TRANSITION ALTITUDE
7000

AFIS: 120.100

AD ELEV: 43

VDF: 120.100

THR ELEV: 29


DIST IN NM

HGT RELATED TO THR RWY 24

ELEV, ALT AND HGT IN FT

CIRCLING HGT RELATED TO AD ELEV


BEARINGS ARE MAGNETIC - VAR 14.2 ° E (2015)

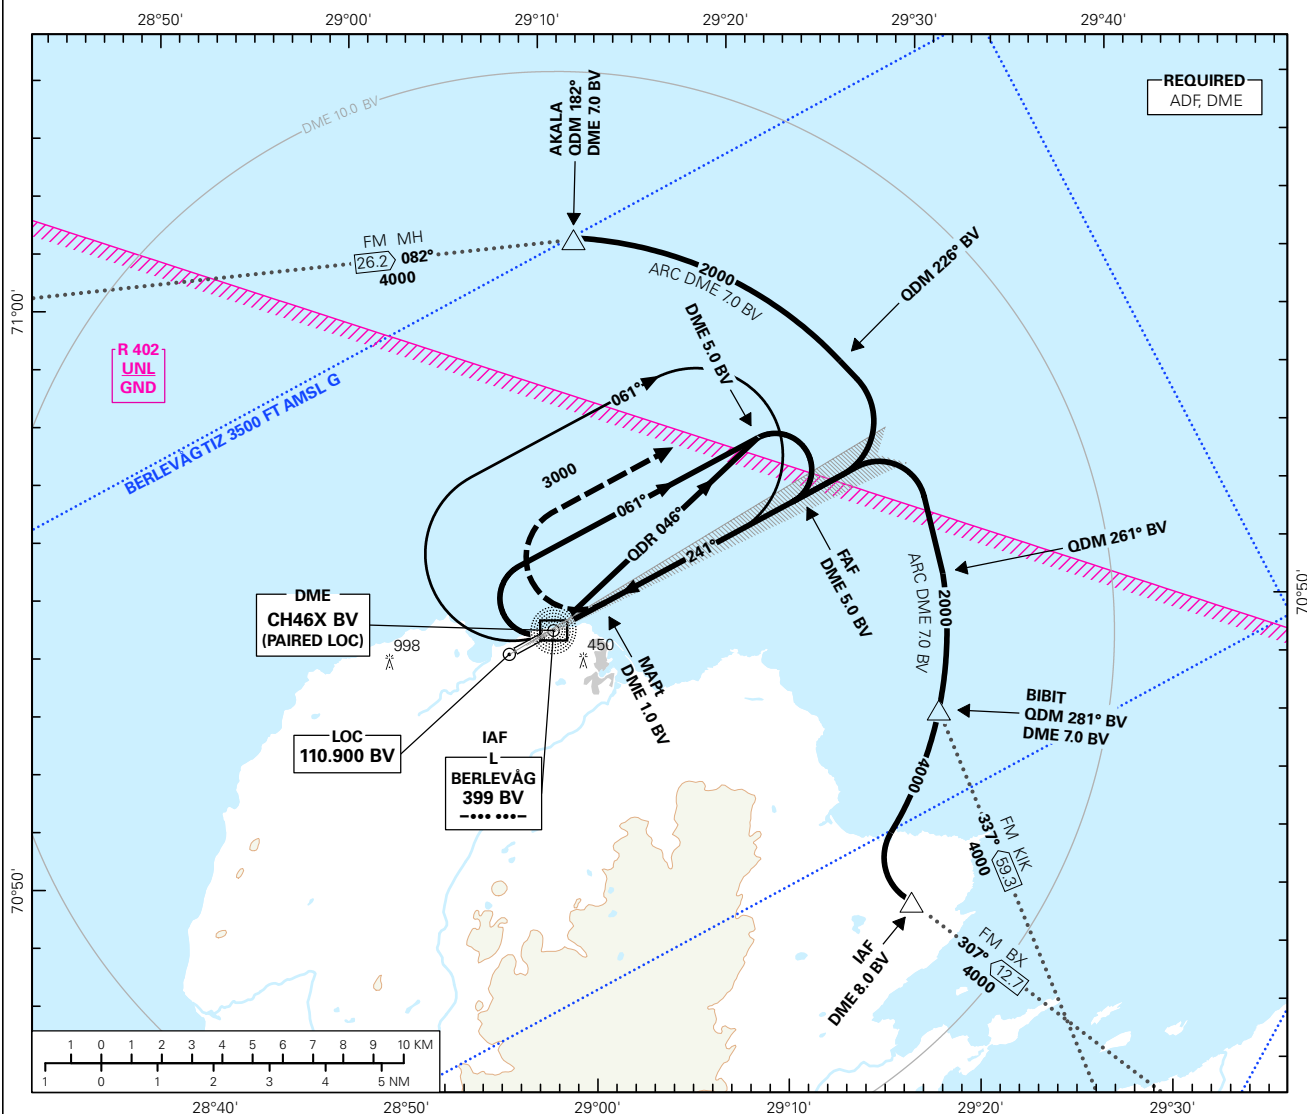

DIST TO BV	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	-	-	2000 (1971)	1640 (1611)	1270 (1241)	910 (881)

MISSED APCH:
TURN RIGHT TO 061°.
WHEN PASSING 1000,
TURN RIGHT DCT BV.
ENTER BV HOLDING
CLIMBING TO 3000.

NOTE: MAX 130 KT IAS.

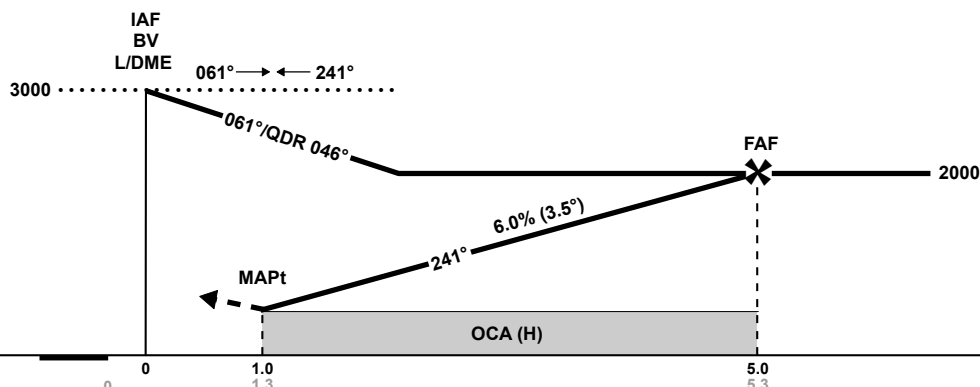

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 4.0					
OCA(H)	540 (511)	-	-	-	SPEED	KT	70	90	100	120	130
STRAIGHT - IN	-	-	-	-	TIME	MIN:SEC	03:26	02:40	02:24	02:00	01:51
CIRCLING	1040 (997)	1290 (1247)	-	-	ROD	FT/MIN	430	550	610	735	795
	1040 (997)	1150 (1107)*	-	-							

NOTE: *CIRCLING S OF AD ONLY.

CHANGES: MAGNETIC VARIATION, EDITORIALS.

Avinor

02 FEB 2017