




STANDARD ARRIVAL CHART INSTRUMENT - ICAO

 MSA 25 NM BDF	ATIS: 129.725		ALT AND ELEV ARE IN FT DIST IN NM			BARDUFLOSS RWY 10 NORWAY ANDOR 6S, ROSKO 2S, TULDA 6S	
	APP: 118.800 125.850						
	TWR: 118.100 122.100						
	VDF: 118.800						
			1:800 000	VAR: 7.6 ° E (2015)	TA 7000		

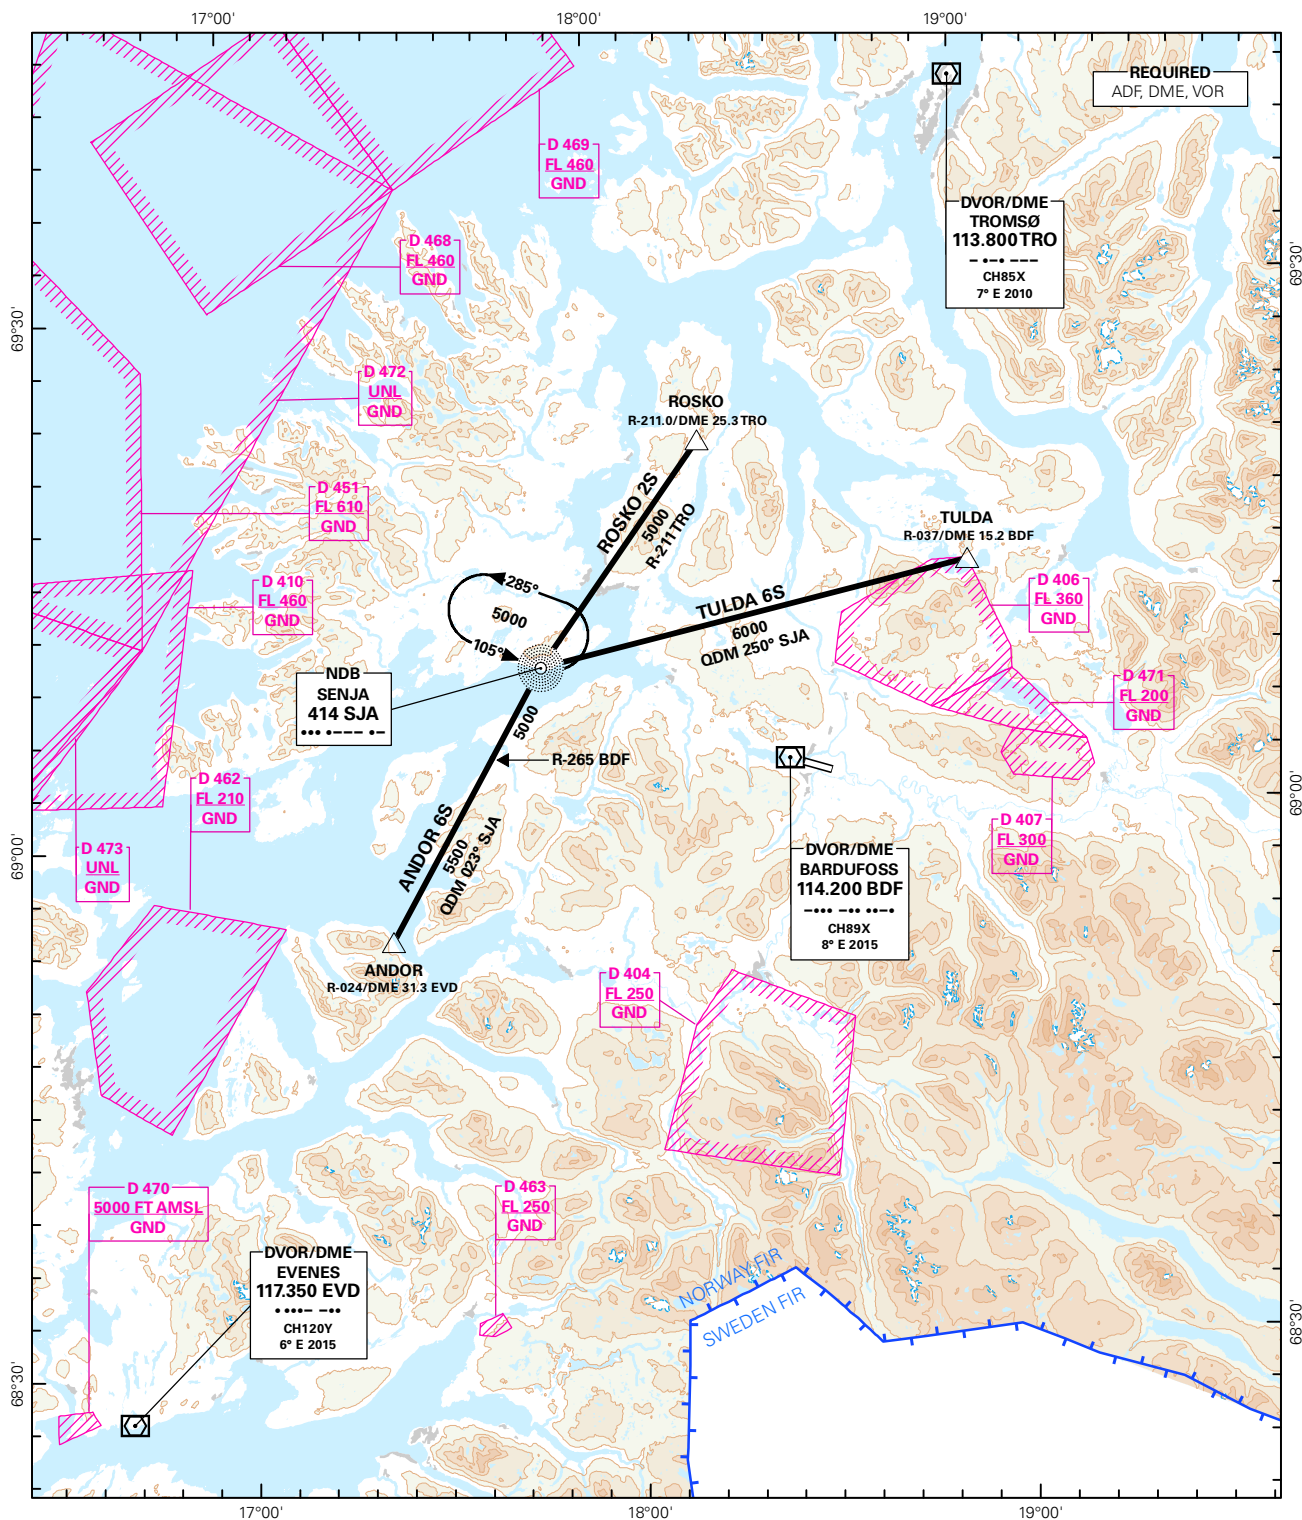

STAR DESCRIPTION OVERLEAF
DESCRIPTION OF WAYPOINTS, REF ENR 4.4

ATS AIRSPACE CLASSIFICATIONS: REF ENR 1.4
LEGEND: REF GEN 2.3



CHANGES: COMPLETE REVISION.

STANDARD ARRIVAL ROUTES - INSTRUMENT**BARDUFOSS
RWY 10****GENERAL:** Surveillance service shall be available.**VECTORIZING:** Vectoring may be used for sequencing.**RADIO COMMUNICATION FAILURE:** Squawk A7600. Proceed on STAR and make APCH to RWY 10.

DESIGNATOR	ROUTE	RESTRICTIONS	DESCEND	CLEARANCE LIMIT
ANDOR 6S (ANDOR SIX SIERRA ARRIVAL)	From ANDOR proceed inbound on QDM 023° SJA to SJA.	Cross ANDOR at or above 7000 FT. Cross R-265 BDF at or above 5500 FT. Cross SJA at or above 5000 FT.	As cleared by ATC.	SJA
ROSKO 2S (ROSKO TWO SIERRA ARRIVAL)	From ROSKO proceed inbound on R-211 TRO to SJA.	Cross ROSKO at or above 5000 FT. Cross SJA at or above 5000 FT.	As cleared by ATC.	SJA
TULDA 6S (TULDA SIX SIERRA ARRIVAL)	From TULDA proceed inbound on QDM 250° SJA to SJA.	Cross TULDA at or above 9000 FT. Cross SJA at or above 6000 FT.	As cleared by ATC.	SJA