

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:450 000


HARSTAD/NARVIK

EVENES

RNAV(GNSS) Z RWY 35


TRANSITION ALTITUDE
7000

ATIS: 126.025	AD ELEV: 85	
APP: 120.100	THR ELEV: 81	DIST IN NM
TWR: 120.100 118.000	HGT RELATED TO THR RWY 35	ELEV, ALT AND HGT IN FT
VDF: 120.100	CIRCLING HGT RELATED TO AD ELEV	
	BEARINGS ARE MAGNETIC - VAR 6.4 ° E (2015)	

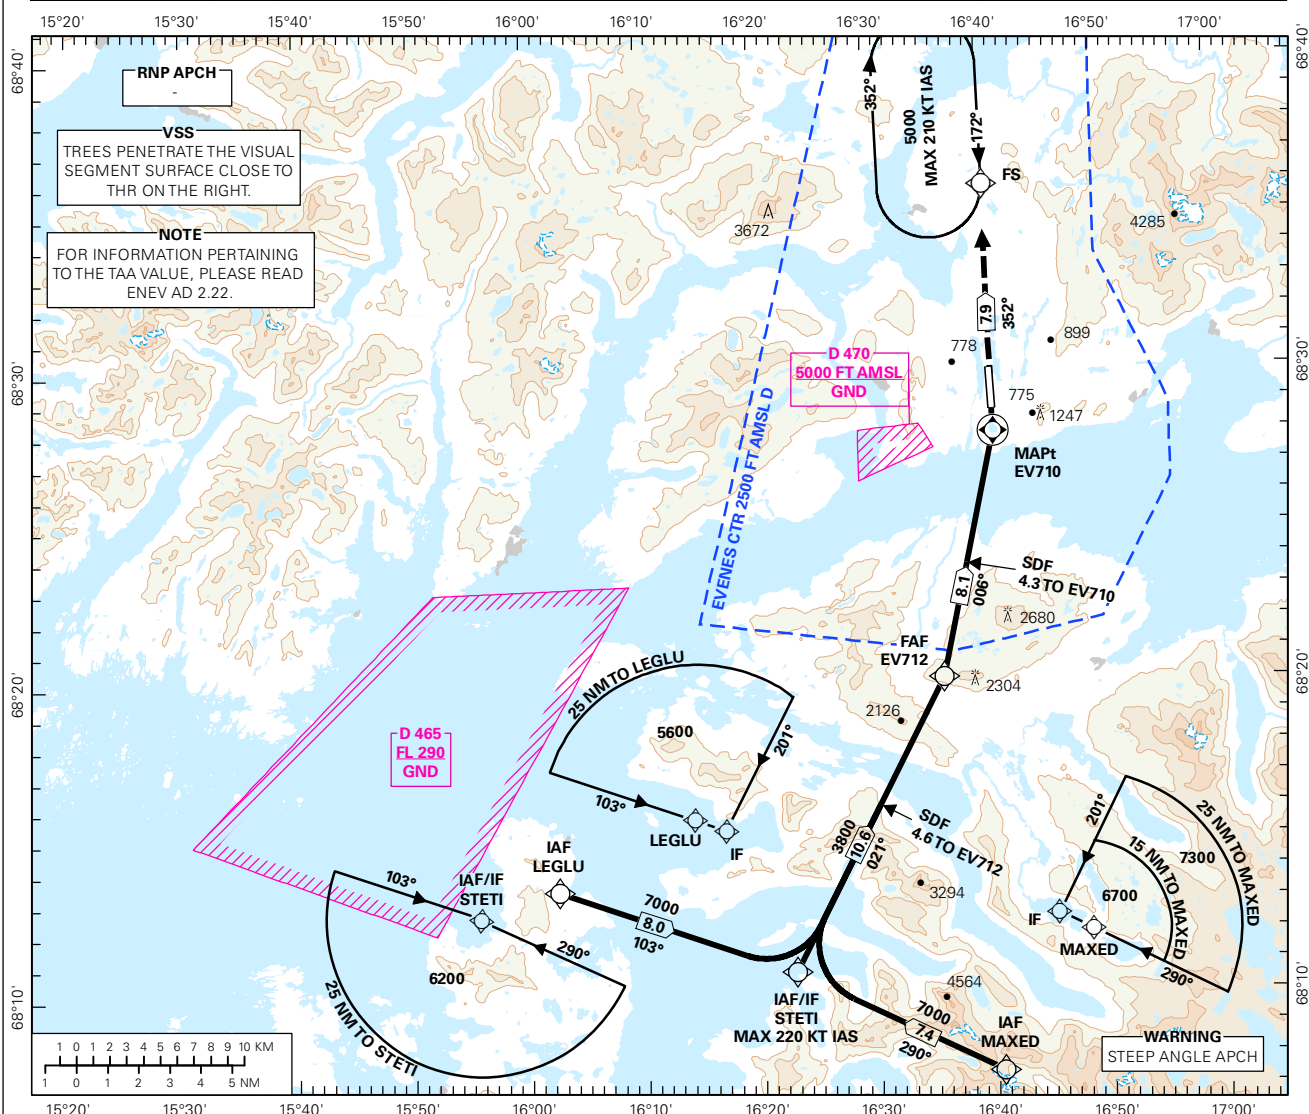

DIST TO EV710	8	7	6	5	4	3	2	1
ALT (HGT)	3780 (3699)	3360 (3279)	2950 (2869)	2530 (2449)	2120 (2039)	1700 (1619)	1290 (1209)	870 (789)

PROCEDURE OFFSET: 15°

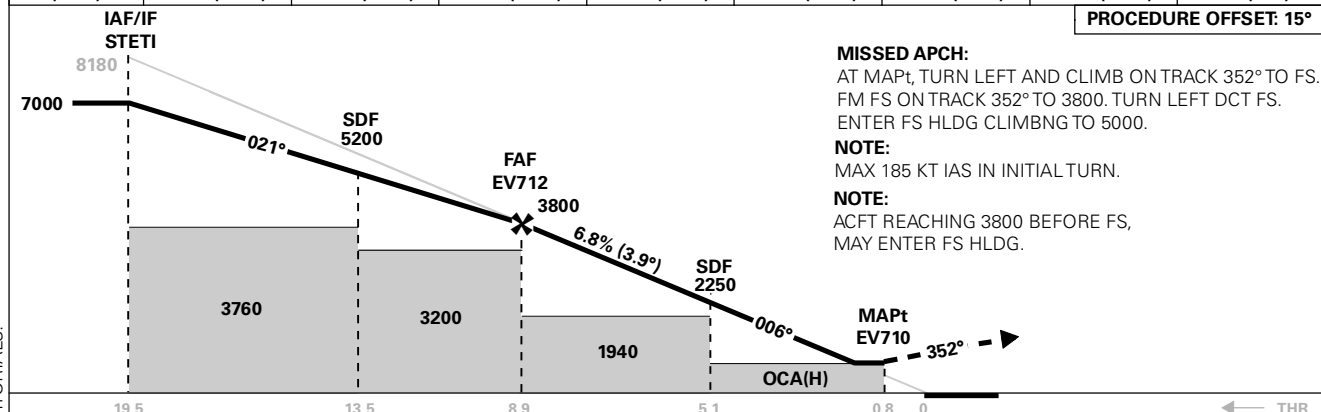

MISSED APCH:

AT MAPt, TURN LEFT AND CLIMB ON TRACK 352° TO FS.
FM FS ON TRACK 352° TO 3800. TURN LEFT DCT FS.
ENTER FS HLDG CLIMBING TO 5000.

NOTE:

MAX 185 KT IAS IN INITIAL TURN.

NOTE:

ACFT REACHING 3800 BEFORE FS,
MAY ENTER FS HLDG.

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 8.1
OCA(H)	860 (780)					
STRAIGHT - IN	-	-	-	-	SPEED	KT 70 90 120 150 180
CIRCLING	1130 (1045)	1690 (1605)	2090 (2005)	2140 (2055)	TIME	MIN:SEC 06:55 05:23 04:02 03:14 02:42
					ROD	FT/MIN 485 625 830 1040 1245

NOTE: CIRCLING W OF AD ONLY.

CHANGES: CTR, EDITORIALS.

Avinor

30 MAR 2017

RECOMMENDED RNAV PROCEDURE CODING

ENAV RNAV(GNSS) Z RWY 35										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	LEGLU	-	-	-	-	-	A7000+	-	-
020	TF	STETI	-	103 (109.2)	-	8.0	-	A7000+	K220-	-
010	IF	MAXED	-	-	-	-	-	A7000+	-	-
020	TF	STETI	-	290 (296.6)	-	7.4	-	A7000+	K220-	-
010	IF	STETI	-	-	-	-	-	A7000+	K220-	-
020	TF	EV712	-	021 (027.6)	-	10.6	-	A3800+	-	-
030	TF	EV710	Y	006 (012.5)	-	8.1	-	-	-	-
040	TF	FS	-	352 (358.7)	-	7.9	-	-	-	-
050	FA	FS	-	352 (358.7)	-	-	-	A3800+	-	-
060	DF	FS	-	-	-	-	L	-	-	-
070	HM	FS	-	172 (178.6)	-	1 MIN	R	A5000	K210-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.