

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000


FLORØ

FLORØ

RNAV(GNSS)-D

TRANSITION ALTITUDE
6000

ATIS: 124.625	AD ELEV: 37	
AFIS: 119.200	THR ELEV: 37	DIST IN NM
VDF: 119.200	HGT RELATED TO THR RWY 07	ELEV, ALT AND HGT IN FT
	CIRCLING HGT RELATED TO AD ELEV	
	BEARINGS ARE MAGNETIC - VAR 0.1 ° E (2015)	

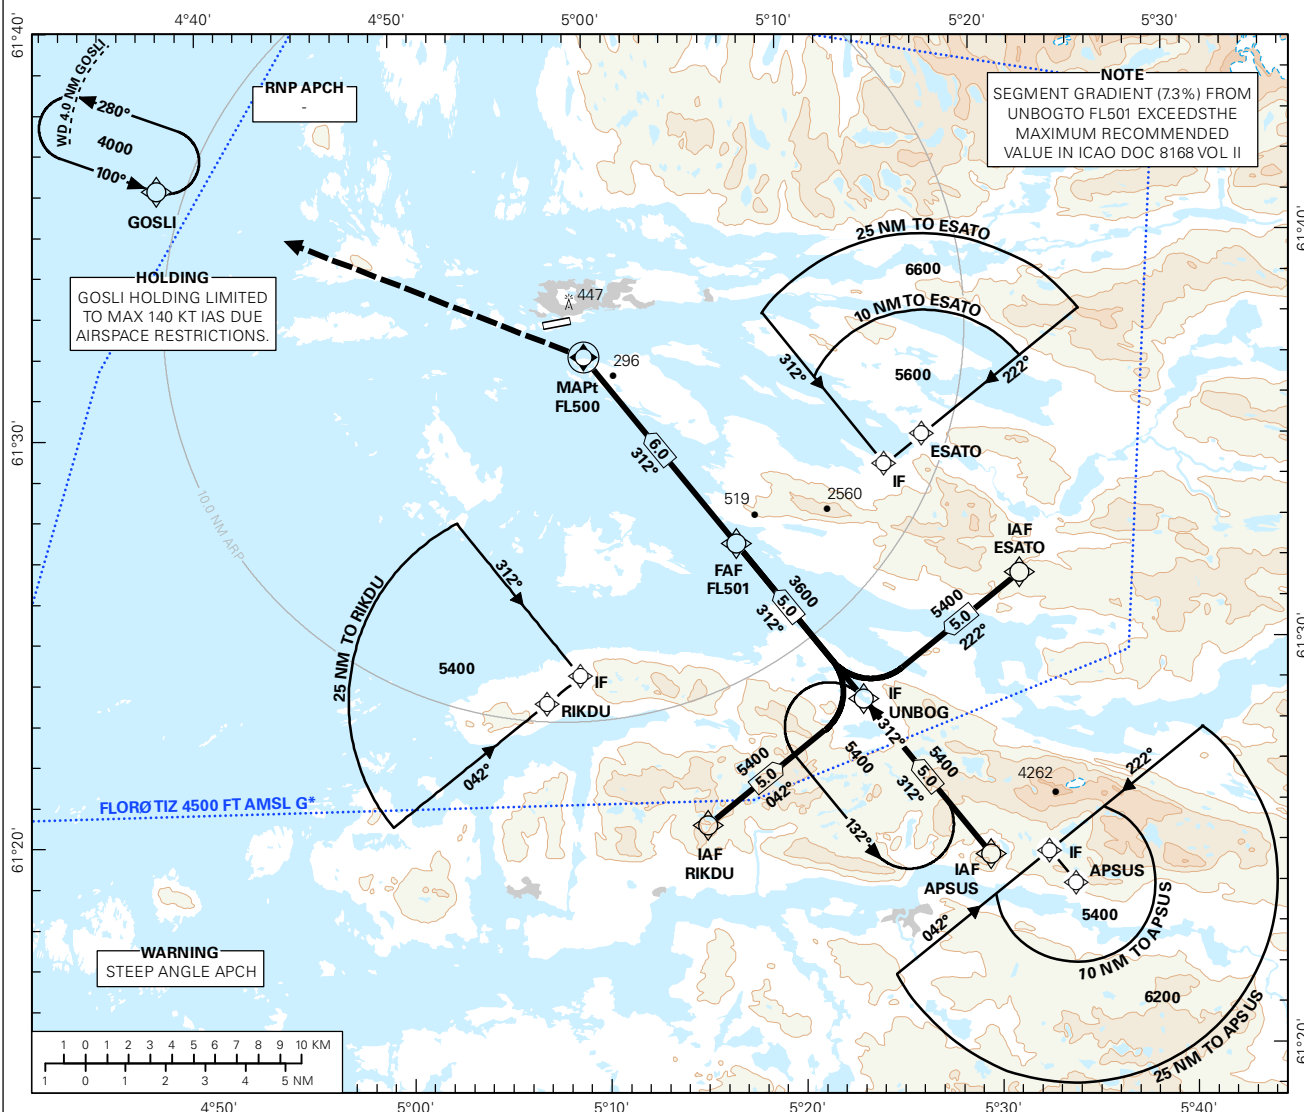


DIST TO FL500	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	3190 (3153)	2750 (2713)	2310 (2273)	1870 (1833)	1420 (1383)	980 (943)

MISSED APCH:
TURN LEFT DCT GOSLI.
ENTER GOSLI HOLDING CLIMBING TO 4000.

NO TURN BEFORE MAPt.

NOTE:
DESCENT GRADIENT CALCULATED
FM FAF TO MAPt.

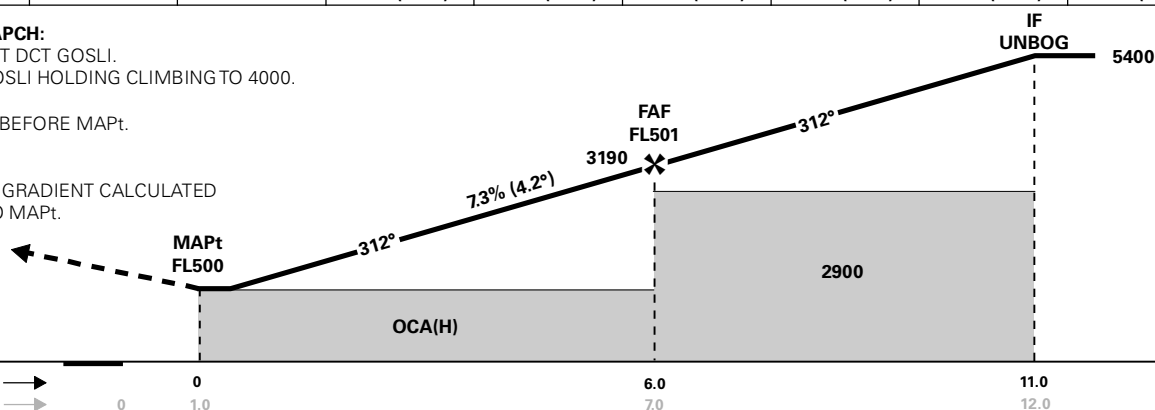

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 6.0
CIRCLING RWY 07 LNAV 2.5%*	780 (743)	810 (773)	-	-	SPEED	KT 70 90 100 120 130
LNAV 3.0%*	640 (603)	670 (633)	-	-	TIME	MIN:SEC 05:09 04:00 03:36 03:00 02:47
LNAV 3.5%*	550 (513)	-	-	-	ROD	FT/MIN 520 665 740 885 960
CIRCLING RWY 25	640 (603)	1280 (1243)	-	-		

NOTE: *MNM MISSED APCH CLIMB GRADIENT. CIRCLING S OF AD ONLY.

CHANGES: ATIS FREQUENCY.

Avinor

02 APR 2015

RECOMMENDED RNAV PROCEDURE CODING

ENFL RNAV(GNSS)-D										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	RIKDU	-	-	-	-	-	A5400+	-	-
020	TF	UNBOG	-	042(042.2)	-	5.0	-	A5400+	-	-
010	IF	APSUS	-	-	-	-	-	A5400+	-	-
020	TF	UNBOG	-	312(312.2)	-	5.0	-	A5400+	-	-
010	IF	ESATO	-	-	-	-	-	A5600+	-	-
020	TF	UNBOG	-	222(222.4)	-	5.0	-	A5400+	-	-
030	TF	FL501	-	312(312.1)	-	5.0	-	A3600+	-	-
040	TF	FL500	Y	312(312.0)	-	6.0	-	-	-	-
050	DF	GOSLI	-	-	-	-	L	A4000	-	-
060	HM	GOSLI	-	100(099.7)	-	4.0*	L	A4000	K140-	-

* 4.0 NM FM GOSLI

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: UNBOG holding not included in standard APCH transitions