


INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

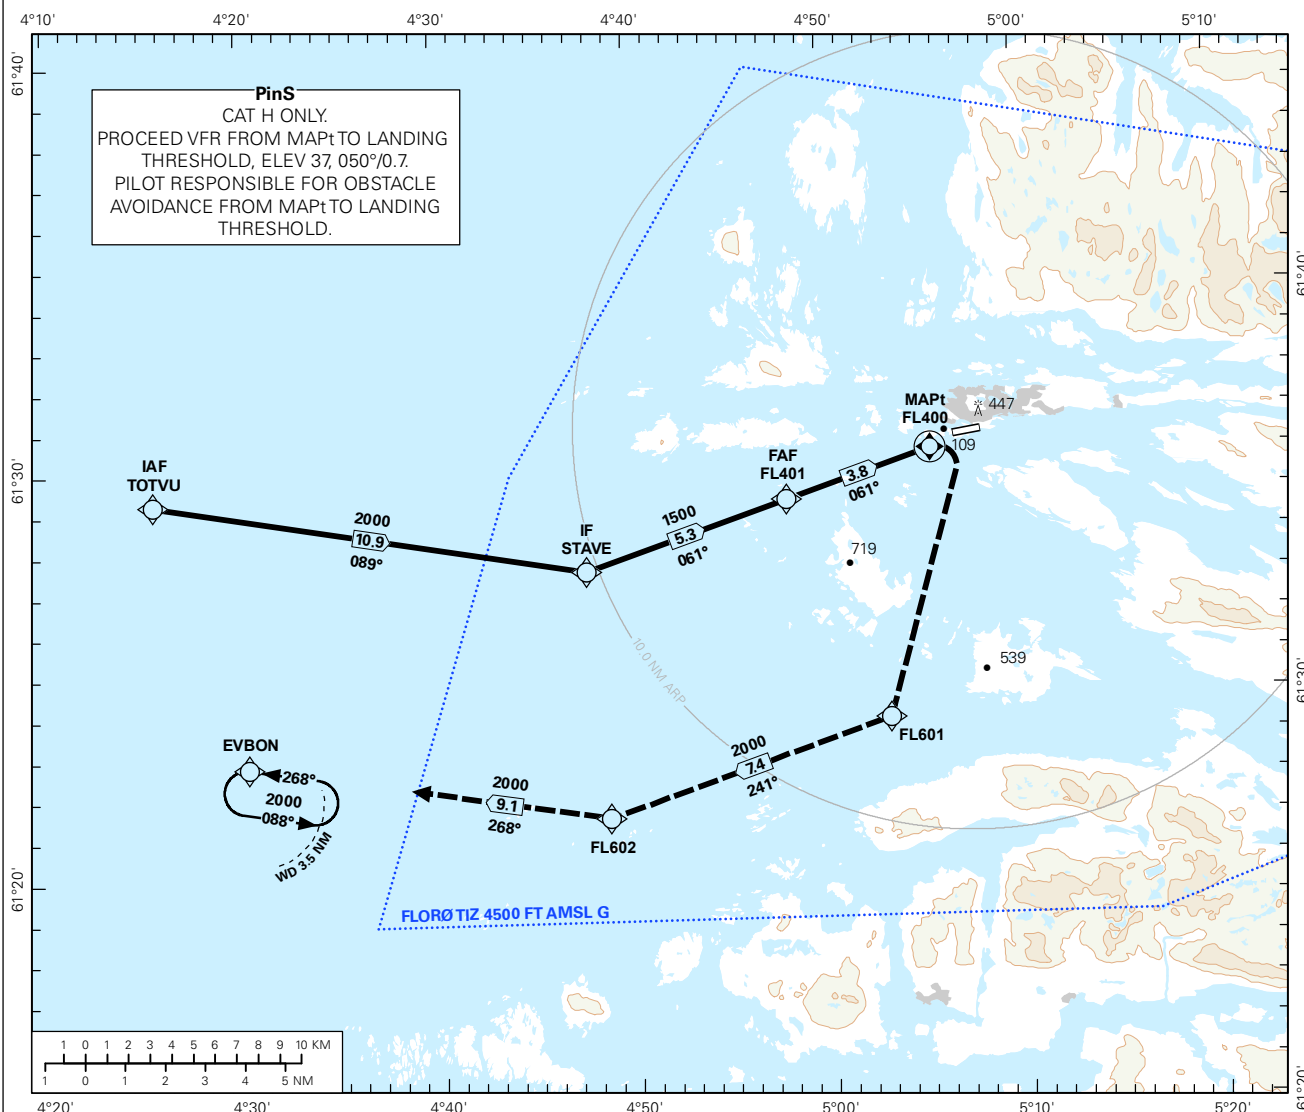
FLORØ

FLORØ

RNAV(GNSS) 061

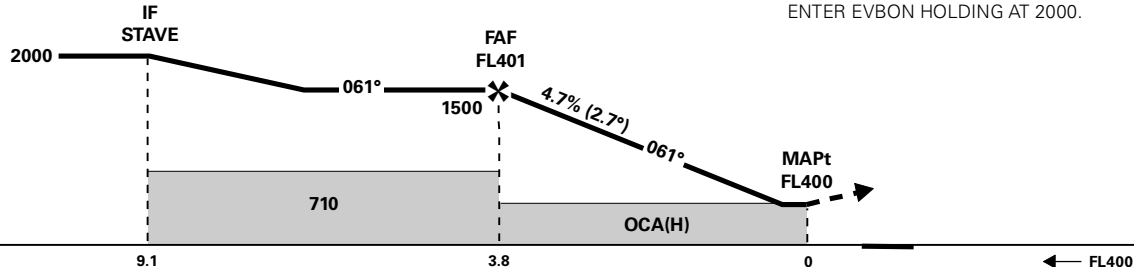
TRANSITION ALTITUDE
6000

	ATIS: 124.625	AD ELEV: 37	
	AFIS: 119.200	THR ELEV: 37	DIST IN NM
	VDF: 119.200	HGT RELATED TO THR RWY 07	ELEV, ALT AND HGT IN FT
	CIRCLING HGT RELATED TO AD ELEV		
	BEARINGS ARE MAGNETIC - VAR 0.1 ° E (2015)		



DIST TO FL400	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	-	-	-	1270 (1233)	990 (953)	700 (663)

MISSED APCH:

TURN RIGHT DCT FL601, TO FL602, TO EVBON.
ENTER EVBON HOLDING AT 2000.

CAT OF ACFT	H				FINAL APCH	DIST FAF - MAPt: 3.8
OCA(H)	LNAV 4.2%*	410 (373)	-	-	-	
		-	-	-	-	
CIRCLING		-	-	-	-	
		-	-	-	-	

NOTE: VISUAL MANOEUVRING REQUIRED. *MNM MISSED APCH CLIMB GRADIENT.

CHANGES: EDITORIALS.

Avinor

17 SEP 2015

RECOMMENDED RNAV PROCEDURE CODING

ENFL RNAV(GNSS) 061										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	TOTVU	-	-	-	-	-	A2000+	-	-
020	TF	STAVE	-	089(088.8)	-	10.9	-	A2000+	-	-
030	TF	FL401	-	061(060.7)	-	5.3	-	A1500+	-	-
040	TF	FL400	Y	061(060.9)	-	3.8	-	-	-	-
050	DF	FL601	-	-	-	-	R	-	-	-
060	TF	FL602	-	241(241.0)	-	7.4	-	-	-	-
070	TF	EV BON	-	268(268.4)	-	9.1	-	A2000	-	-
080	HM	EV BON	-	268(268.3)	-	3.5*	-	A2000	-	-

* 3.5 NM FM EVBON

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.