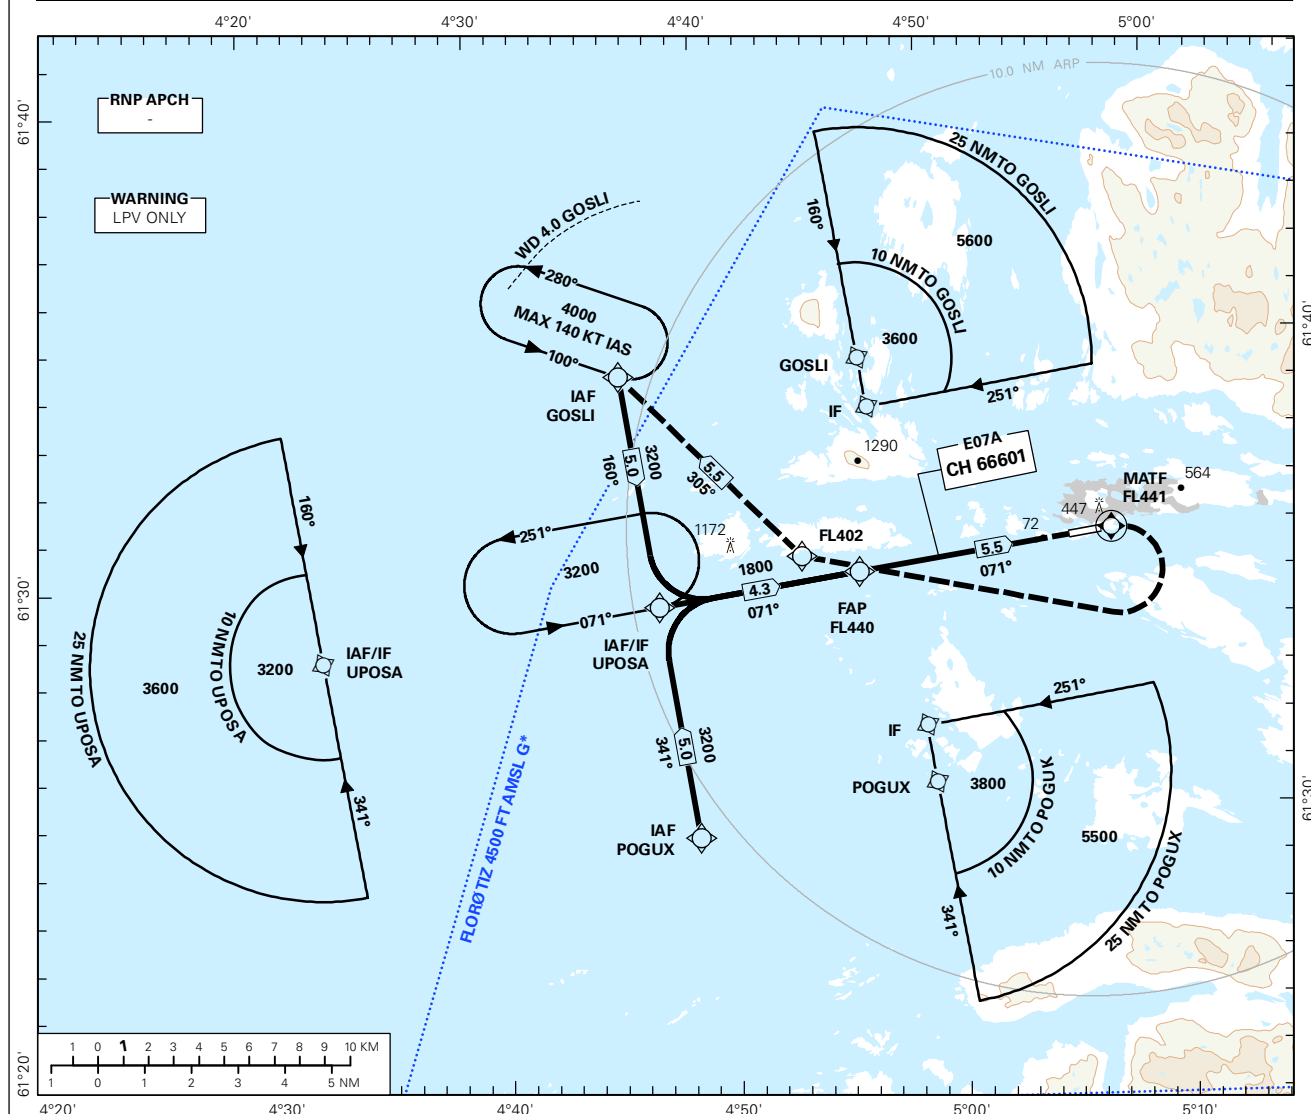


INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:300 000

FLORØ

FLORØ

RNAV(GNSS) Y RWY 07

TRANSITION ALTITUDE
6000


DIST TO THR	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	-	-	1587 (1550)	1209 (1172)	833 (796)	459 (422)

MISSED APCH:

CLIMB STRAIGHT AHEAD TO FL441. TURN RIGHT* DCT FL402. TO GOSLI. ENTER GOSLI HOLDING CLIMBING TO 4000.

* MISSED APCH TURN LIMITED TO 130 KT IAS

NOTE: VPA (3.5°) NOT CONSISTENT WITH PLASI ANGLE (4.5°).

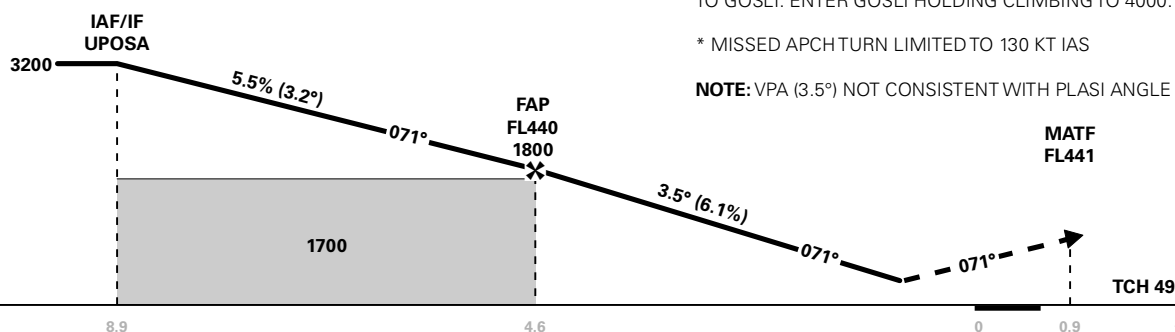

CAT OF ACFT	A	B	C	D	FINAL APCH	KT	70	90	100	120	130
OCA(H)	LPV (2.5%)*	600 (563)	610 (573)	-	-	SPEED	70	90	100	120	130
STRAIGHT - IN	LPV (3.0%)*	470 (433)	480 (443)	-	-	TIME	MIN:SEC	-	-	-	-
	LPV (4.0%)*	380 (343)	390 (353)	-	-	ROD	FT/MIN	435	560	620	745
CIRCLING	LPV (5.0%)*	340 (303)	350 (313)	-	-						
		640 (603)	1280 (1243)	-	-						

NOTE: CIRCLING S OF AD ONLY. * MINIMUM MISSED APCH CLIMB GRADIENT.

CHANGES: NEW PROCEDURE.

Avinor

02 APR 2015

RECOMMENDED RNAV PROCEDURE CODING

ENFL RNAV (GNSS) Y RWY 07										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/ TCH
010	IF	GOSLI	-	-	-	-	-	A4000+	-	-
020	TF	UPOSA	-	160(160.6)	-	5.0	-	A3200+	-	-
010	IF	POGUX	-	-	-	-	-	A4000+	-	-
020	TF	UPOSA	-	341(340.7)	-	5.0	-	A3200+	-	-
010	IF	UPOSA	-	-	-	-	-	A3200+	-	-
020	TF	FL440	-	071(070.6)	-	4.3	-	A1800+	-	-
030	TF	RW07	Y	071 (070.6)	-	4.6	-	-	-	-3.5°/15
040	TF	FL441	Y	071(070.8)	-	0.9	-	-	-	-
050	DF	FL402	-	-	-	-	R	-	K130-	-
060	TF	GOSLI	-	305(305.2)	-	5.5	-	A4000	-	-
070	HM	GOSLI	-	100(099.7)	-	4.0*	L	A4000	K140-	-

* 4.0 NM FM GOSLI

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.

Note: Waypoint RW07 (Serial Number 030) used for ARINC 424 coding purposes only

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	57.2
SBAS Provider	1	FPAP latitude	613509.1585N
Airport Identifier	ENFL	FPAP longitude	0050217.4725E
Runway	07	Threshold crossing height	15
Approach performance designator	0	TCH units	M
Route Indicator	Y	Glide path angle	3.5
Reference path data selector	0	Course width at threshold	105
Reference path Identifier	E07A	Length offset	472
LTP/FTP latitude	613451.2430N	Horizontal alert limit (HAL)	40
LTP/FTP longitude	0050028.9070E	Vertical alert limit (VAL)	50
PRECISION APPROACH PATH CRC REMAINDER			99263570

NON FAS DATA BLOCK FIELDS

LTP Ortometric Height	11.3
FPAP Ortometric Height	6.7