

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

FLORØ

FLORØ

RNAV(GNSS) RWY 25

TRANSITION ALTITUDE
6000

ATIS: 124.625

AD ELEV: 37

AFIS: 119.200

THR ELEV: 22

DIST IN NM


VDF: 119.200

HGT RELATED TO THR RWY 25

ELEV, ALT AND HGT IN FT

CIRCLING HGT RELATED TO AD ELEV

BEARINGS ARE MAGNETIC - VAR 0.1 ° E (2015)

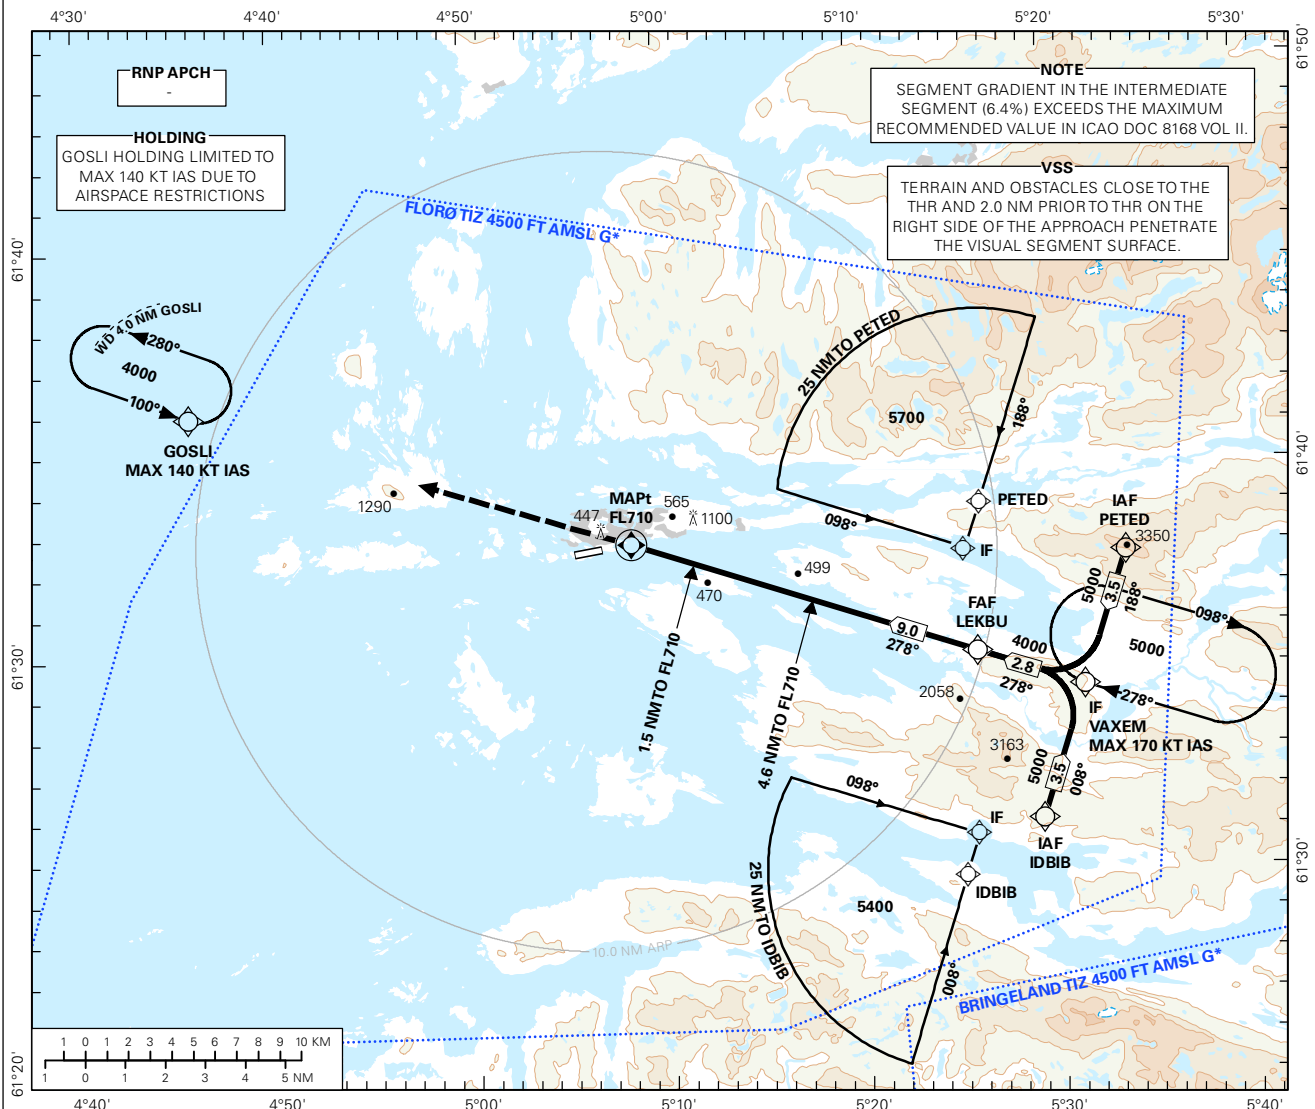


DIST TO FL710	8	7	6	5	4	3	2	1
ALT (HGT)	3590 (3568)	3190 (3168)	2780 (2758)	2380 (2358)	1970 (1948)	1570 (1548)	1160 (1138)	760 (738)

PROCEDURE OFFSET: 27°

MISSED APCH:

PROCEED DCT GOSLI. ENTER GOSLI
HOLDING CLIMBING TO 4000.

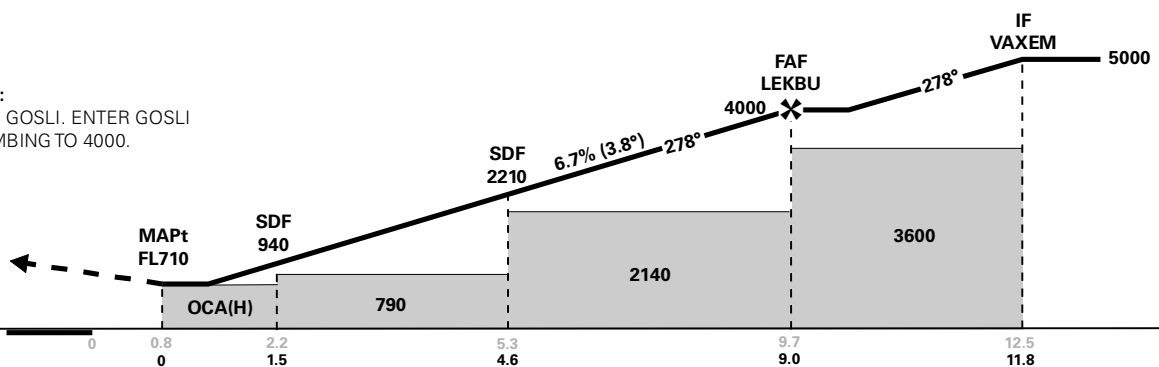

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 9.0
OCA(H)	LNAV 2.5%* 650 (628)	670 (648)	-	-	SPEED	KT 70 90 100 120 130
STRAIGHT - IN	LNAV 3.0%* 610 (588)	-	-	-	TIME	MIN:SEC 07:44 06:01 05:25 04:31 04:10
CIRCLING	670 (633)	1280 (1243)	-	-	ROD	FT/MIN 475 610 675 810 880

NOTE: CIRCLING S OF AD ONLY. *MNM MISSED APCH CLIMB GRADIENT.

CHANGES: ATIS FREQUENCY.

Avinor

02 APR 2015

RECOMMENDED RNAV PROCEDURE CODING

ENFL RNAV(GNSS) RWY 25										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
01	IF	PETED	-	-	-	-	-	A5700+	-	-
02	TF	VAXEM	-	188(188.3)	-	3.5	-	A5000+	K170-	-
01	IF	IDBIB	-	-	-	-	-	A5400+	-	-
02	TF	VAXEM	-	008(008.3)	-	3.5	-	A5000+	K170-	-
03	TF	LEKBU	-	278(278.4)	-	2.8	-	A4000+	-	-
04	TF	FL710	Y	278(278.3)	-	9.0	-	-	-	-
05	DF	GOSLI	-	-	-	-	-	A4000	K140-	-
06	HM	GOSLI	-	100(099.7)	-	4.0*	L	A4000	K140-	-

* 4.0 NM FM GOSLI

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: VAXEM holding not included in standard APCH transitions.