



STANDARD ARRIVAL CHART INSTRUMENT (RNAV 1 STAR BASED ON GNSS)

4₆ MSA 25 NM ARP	ATIS: 136.100	ALT AND ELEV ARE IN FT DIST IN NM			HAMMERFEST RWY 05 NORWAY BAREG 1N, KOMIG 1N, LAPVI 1N
	APP: 126.700				
	AFIS: 121.000				
	VDF: 121.000				
		1:1 000 000	VAR: 11.0 ° E (2015)	TA 7000	

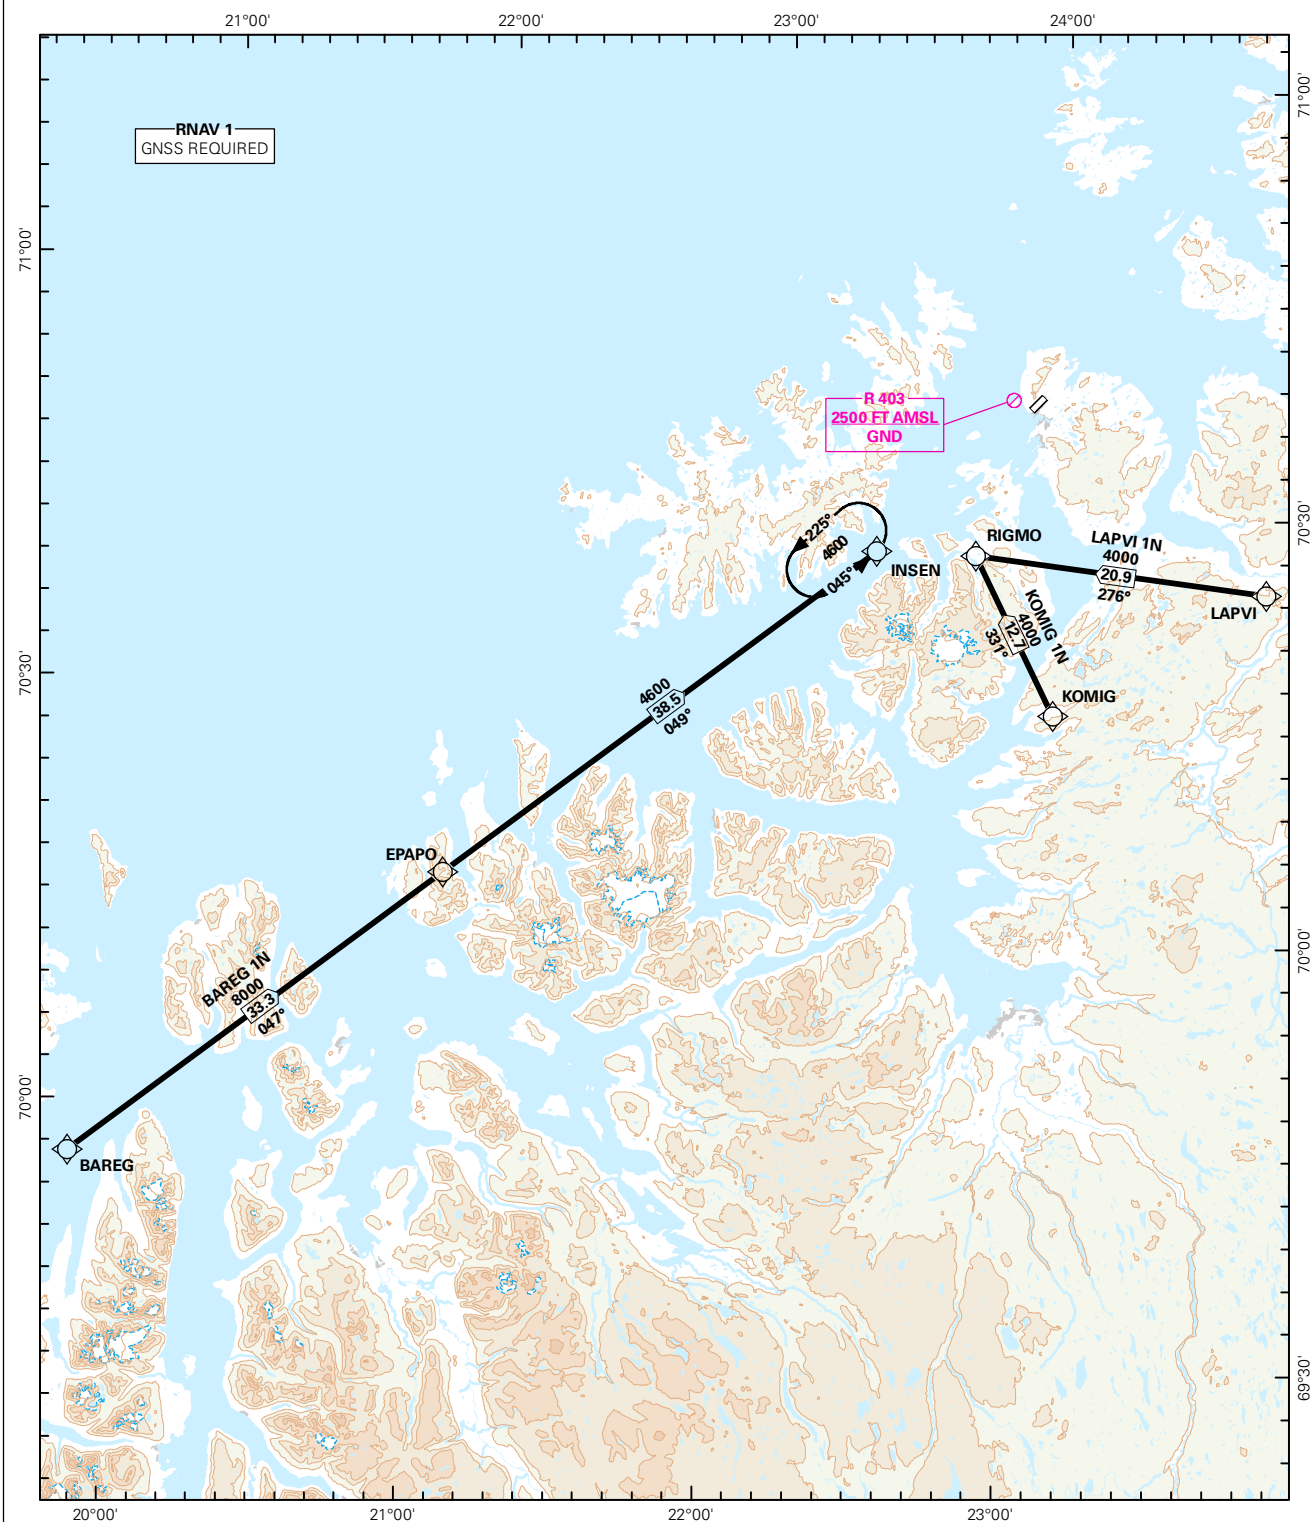

CHANGES: NEW PROCEDURES.



**STANDARD ARRIVAL ROUTES - INSTRUMENT
(RNAV 1 STAR BASED ON GNSS)**
**HAMMERFEST
RWY 05**

REMARKS: CAT A, B only.

GENERAL: Class A GNSS shall not be used.
Surveillance service shall be available.

LOSS OF RNAV 1 CAPABILITY: Request vectoring.

VECTORIZING: Vectoring may be used for sequencing.

RADIO COMMUNICATION FAILURE: Squawk A7600. Proceed on STAR and make APCH to RWY 05.

DESIGNATOR	ROUTE	RESTRICTIONS	DESCEND	CLEARANCE LIMIT
BAREG 1N (BAREG ONE NOVEMBER ARRIVAL)	From BAREG to EPAPO. To INSEN	Cross EPAPO at or above FL080. Cross INSEN at or above 4600 FT.	As cleared by ATC.	INSEN
KOMIG 1N (KOMIG ONE NOVEMBER ARRIVAL)	From KOMIG to RIGMO	Cross RIGMO at or above 4000 FT.	As cleared by ATC.	RIGMO
LAPVI 1N (LAPVI ONE NOVEMBER ARRIVAL)	From LAPVI to RIGMO	Cross RIGMO at or above 4000 FT.	As cleared by ATC.	RIGMO