


INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

HAMMERFEST

HAMMERFEST**RNAV(GNSS) RWY 23**TRANSITION ALTITUDE
7000


ATIS: 136.100	AD ELEV: 262	
APP: 126.700	THR ELEV: 261	DIST IN NM
AFIS: 121.000	HGT RELATED TO THR RWY 23	ELEV, ALT AND HGT IN FT
VDF: 121.000	CIRCLING HGT RELATED TO AD ELEV	
	BEARINGS ARE MAGNETIC - VAR 11.0 ° E (2015)	

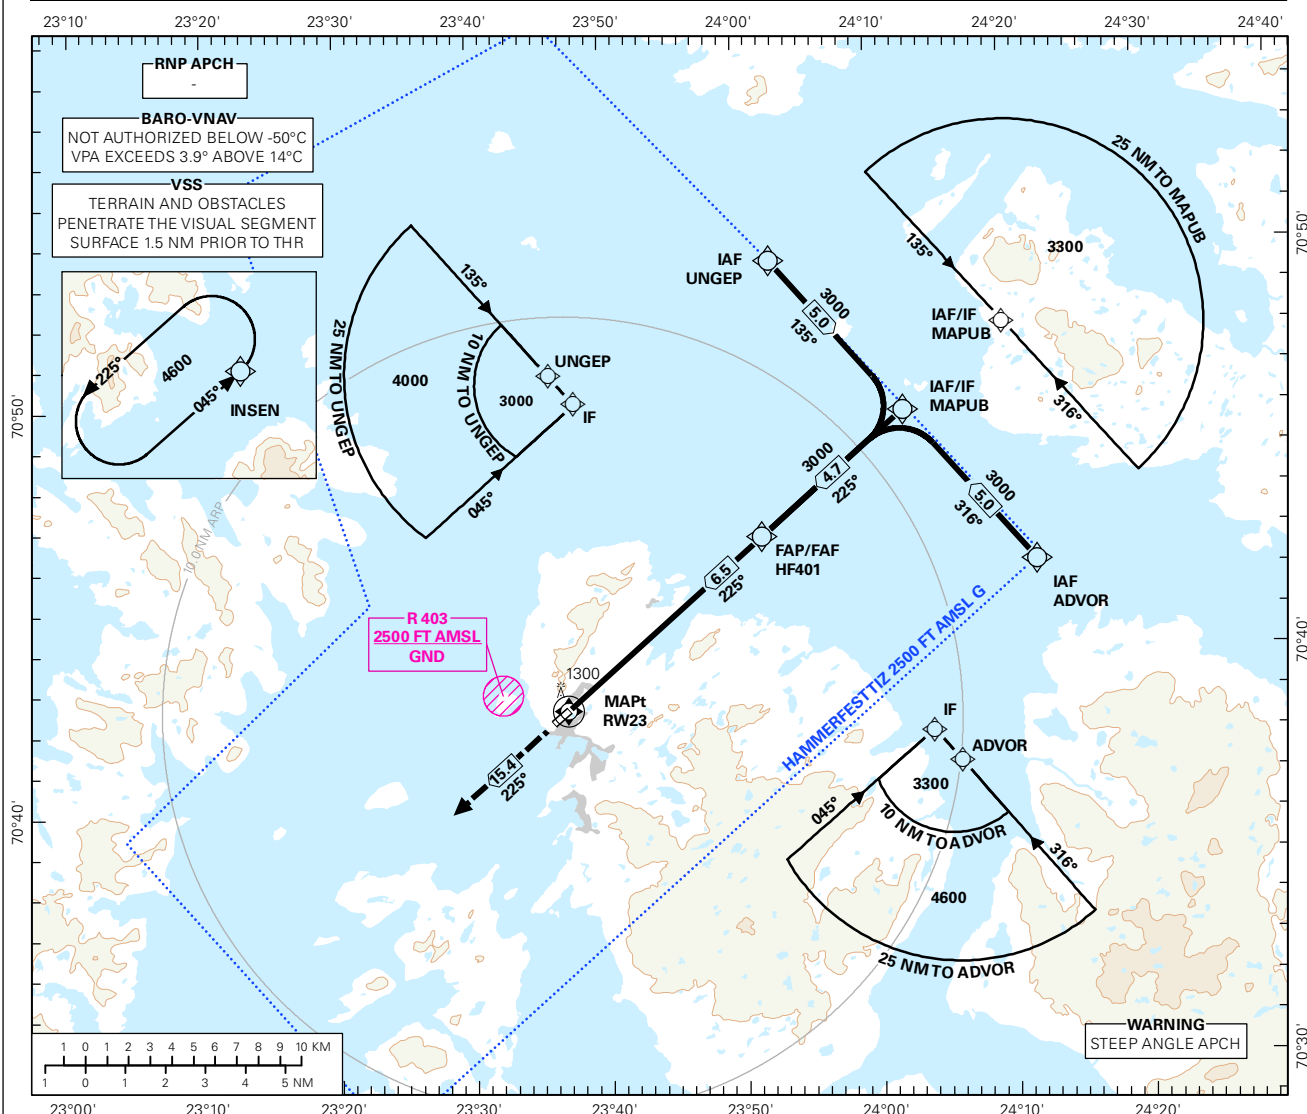

DIST TO RW23	10	9	8	7	6	5	4	3
ALT (HGT)	-	-	-	-	2800 (2539)	2380 (2119)	1970 (1709)	1560 (1299)

MISSED APCH:
CLIMB ON TRACK 225° TO INSEN.
ENTER INSEN HOLDING CLIMBING TO 4600.

NOTE:
VPA (3.9°) NOT CONSISTENT WITH PLASI ANGLE (4.5°).

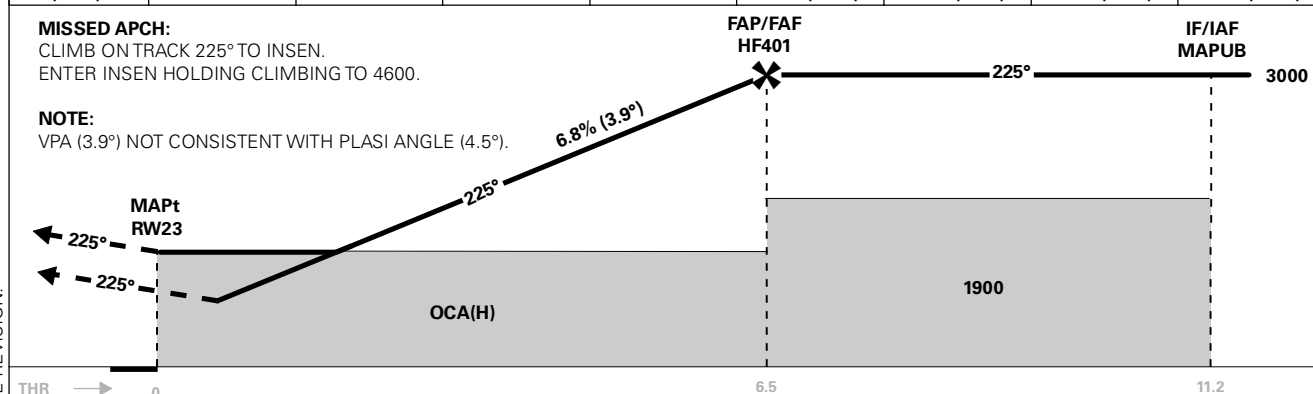

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 6.5
OCA(H)	1330 (1069)	-	-	-	SPEED	KT 70 90 100 120 130
STRAIGHT - IN	1520 (1259)	-	-	-	TIME	MIN:SEC 05:35 04:20 03:54 03:15 03:00
CIRCLING	1520 (1258)	1880 (1618)	-	-	ROD	FT/MIN 485 620 690 830 895

NOTE: CIRCLING SE OF AD ONLY.

CHANGES: COMPLETE REVISION.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENHF RNAV(GNSS) RWY 23										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	UNGEP	-	-	-	-	-	A3000+	-	-
020	TF	MAPUB	-	-	-	5.0	-	A3000+	-	-
010	IF	ADVOR	-	-	-	-	-	A3300+	-	-
020	TF	MAPUB	-	-	-	5.0	-	A3000+	-	-
010	IF	MAPUB	-	-	-	-	-	A3000+	-	-
020	TF	HF401	-	-	-	4.7	-	A3000+	-	-
030	TF	RW23	Y	-	-	6.5	-	-	-	-3.9/15
040	TF	INSEN	-	-	-	15.4	-	A4600	-	-
050	HM	INSEN	-	045(056.0)	-	1 MIN	L	A4600+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.