



HAMMERFEST
HAMMERFEST
RNAV(GNSS) 135

 4 6 MSA 25 NM ARP	ATIS: 136.100	AD ELEV: 262		HAMMERFEST HAMMERFEST RNAV(GNSS) 135 TRANSITION ALTITUDE 7000
	APP: 126.700	THR ELEV: 261	DIST IN NM	
	AFIS: 121.000	HGT RELATED TO THR RWY 23	ELEV, ALT AND HGT IN FT	
	VDF: 121.000	CIRCLING HGT RELATED TO AD ELEV		
	BEARINGS ARE MAGNETIC - VAR 11.0 ° E (2015)			

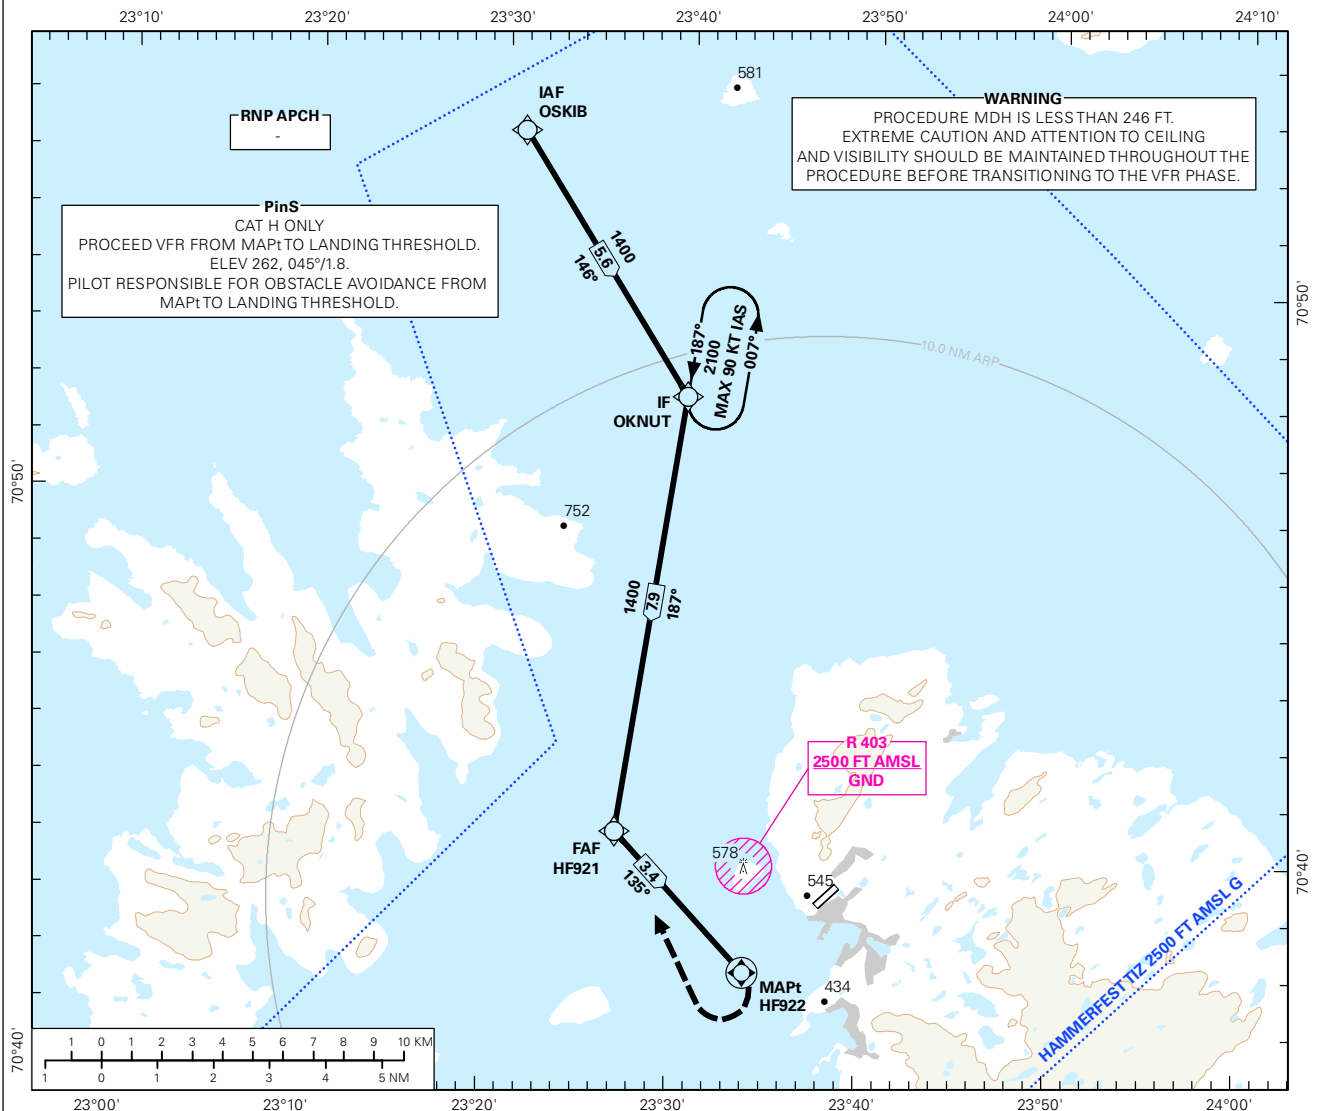

DIST TO HF922	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	-	-	-	1280 (1018)	960 (698)	640 (378)

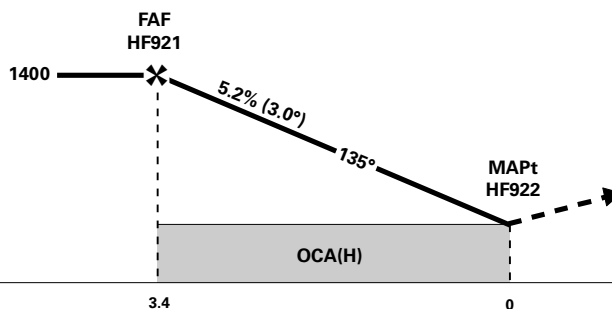

MISSED APCH:
AT MAPt TURN RIGHT DCT HF921. TO OKNUT.
ENTER OKNUT HLDG AT 2100.

NOTE:
DESCENT GRADIENT CALCULATED
FROM HF921 TO HF922

CAT OF ACFT		H				FINAL APCH	DIST FAF - MAPt: 3.4					
OCA(H) STRAIGHT - IN	LNAV 4.2%*	320 (58)**	-	-	-		SPEED	KT	60	70	90	
	LNAV 4.2%*	350 (88)	-	-	-	TIME		MIN:SEC	03:24	02:55	02:16	
CIRCLING		-	-	-	-	ROD	FT/MIN	320	375	480		

NOTE: * MNM MISSED APCH CLIMB GRADIENT.

** SEA VESSELS NOT TAKEN INTO ACCOUNT FOR OCA(H). APPROVED OPERATORS WITH WEATHER RADAR ONLY.

RECOMMENDED RNAV PROCEDURE CODING

ENHF RNAV(GNSS) 135										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	OSKIB	-	-	-	-	-	A1700+	-	-
020	TF	OKNUT	-	-	-	5.6	-	A1400+	-	-
030	TF	HF921	-	-	-	7.9	-	A1400+	-	-
040	TF	HF922	Y	-	-	3.4	-	-	-	-
050	DF	HF921	-	-	-	-	R	-	-	-
060	TF	OKNUT	-	-	-	7.9	-	A2100	-	-
070	HM	OKNUT	-	187(197.8)	-	1 MIN	L	A2100	K90-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.