



HAMMERFEST

	ATIS: 136.100	AD ELEV: 262		HAMMERFEST HAMMERFEST RNAV(GNSS) RWY 05 TRANSITION ALTITUDE 7000
	APP: 126.700	THR ELEV: 262	DIST IN NM	
	AFIS: 121.000	HGT RELATED TO THR RWY 05	ELEV, ALT AND HGT IN FT	
	VDF: 121.000	CIRCLING HGT RELATED TO AD ELEV		
		BEARINGS ARE MAGNETIC - VAR 11.0 ° E (2015)		

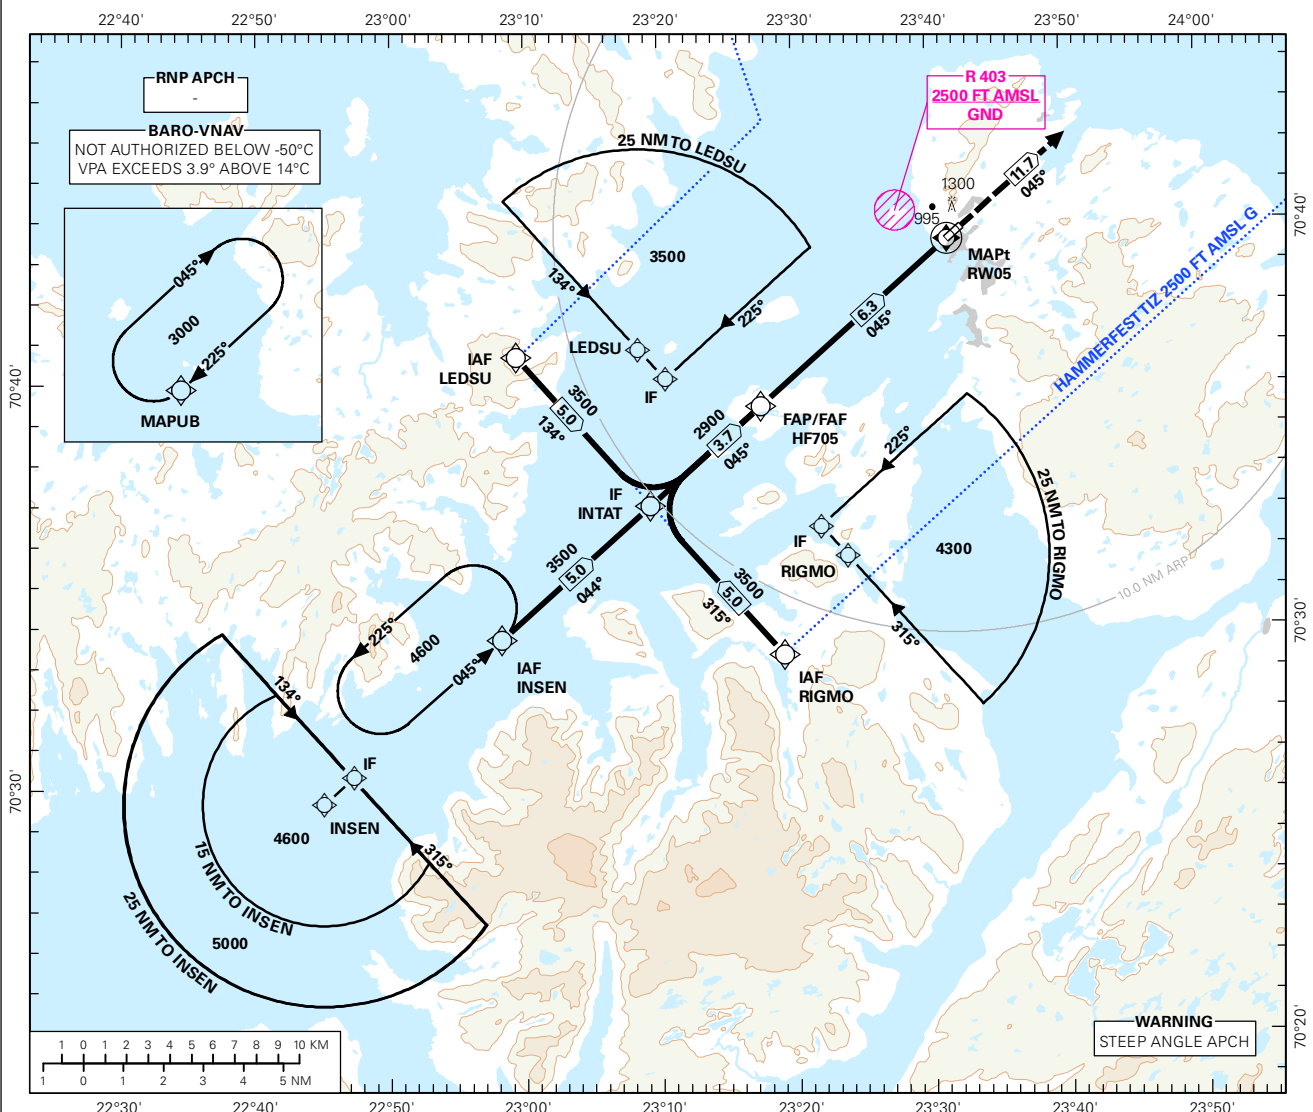

DIST TO RW05	10	9	8	7	6	5	4	3
ALT (HGT)	-	-	-	-	2800 (2538)	2380 (2118)	1970 (1708)	1560 (1298)

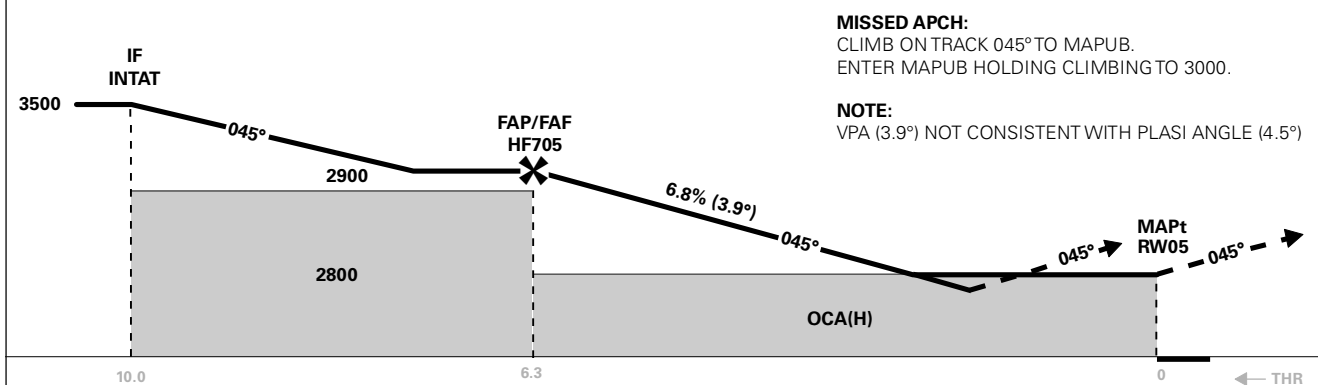

CAT OF ACFT		A	B	C	D	FINAL APCH	DIST FAF - MAPt: 6.3					
OCA(H) STRAIGHT - IN	LNAV/VNAV	1150 (888)	1170 (908)	-	-		SPEED	KT	70	90	100	120
	LNAV	1430 (1168)	1470 (1208)	-	-	TIME		MIN:SEC	05:22	04:11	03:46	03:08
			-	-	-	-						
CIRCLING		1430 (1168)	1890 (1628)	-	-	ROD	FT/MIN	485	620	690	830	895

NOTE: CIRCLING SE OF AD ONLY.

CHANGES: COMPLETE REVISION.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENHF RNAV(GNSS) RWY 05										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	RIGMO	-	-	-	-	-	A4300+	-	-
020	TF	INTAT	-	-	-	5.0	-	A3500+	-	-
010	IF	LEDSU	-	-	-	-	-	A3500+	-	-
020	TF	INTAT	-	-	-	5.0	-	A3500+	-	-
010	IF	INSEN	-	-	-	-	-	A4600+	-	-
020	TF	INTAT	-	-	-	5.0	-	A3500+	-	-
030	TF	HF705	-	-	-	3.7	-	A2900+	-	-
040	TF	RW05	Y	-	-	6.3	-	-	-	-3.9/15
050	TF	MAPUB	-	-	-	11.7	-	-	-	-
060	HM	MAPUB	-	225 (236.4)	-	1 MIN	R	A3000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.