



INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

ATIS:	118.025	AERODROME ELEVATION: 282 FT		KIRKENES HØYBUKTMOEN RNAV (GNSS) RWY 06 TRANSITION ALTITUDE 7000
APP:	-	THR ELEVATION: 280 FT	DIST IN NM	
TWR:	120.350 118.100 (122.100)	HGT RELATED TO THR RWY 06	ELEV, ALT AND HGT IN FT	
VDF:	120.350	CIRCLING HGT RELATED TO AD ELEV		
		BEARINGS ARE MAGNETIC - VAR 13.4 ° E (2010)		

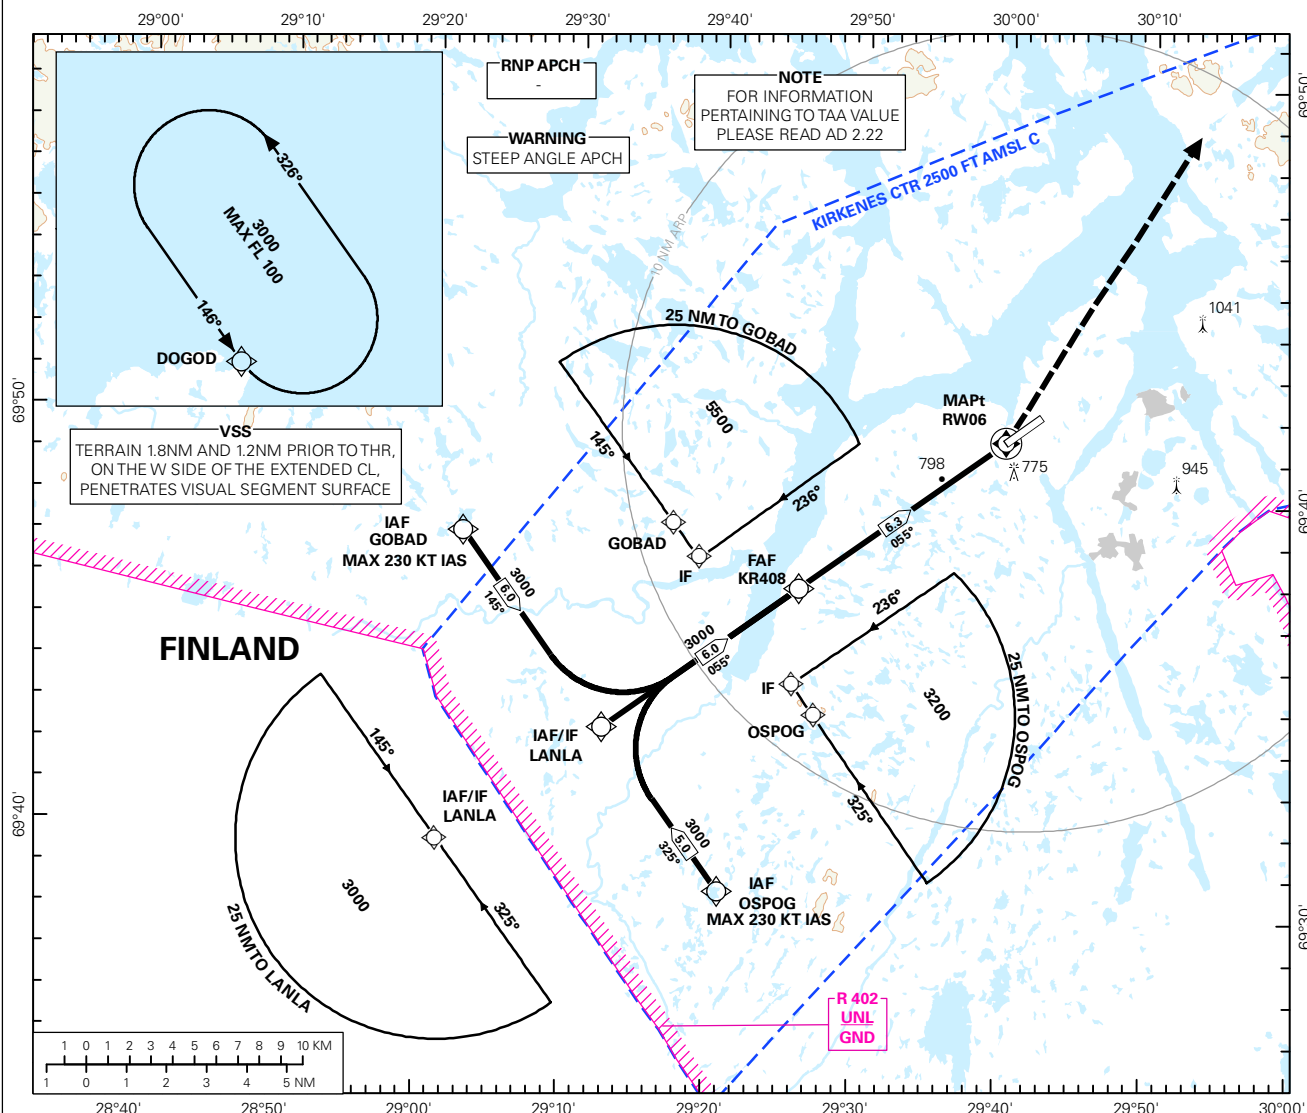

DIST TO RW06	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	-	2880 (2600)	2450 (2170)	2030 (1750)	1610 (1330)	1180 (900)

MISSED APCH:
AT MAPt TURN LEFT DCT DOGOD.
ENTER DOGOD HOLDING CLIMBING
TO 3000 FT.

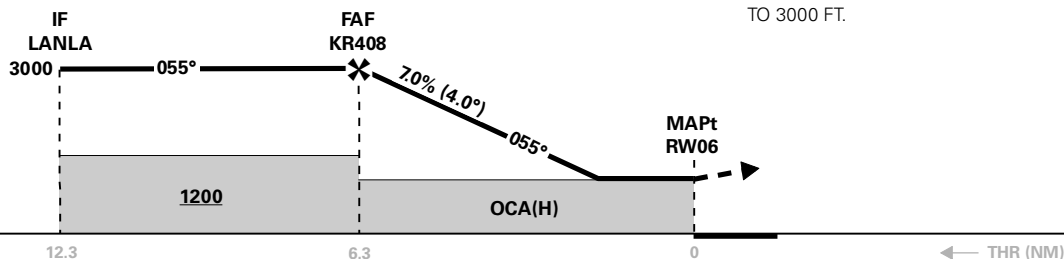

CAT OF ACFT		A	B	C	D	FINAL APPROACH					
OCA(H) STRAIGHT - IN	LNAV	1100 (820)				SPEED	DIST FM FAF - MAPt: 6.3 NM				
		-	-	-	-		KT	70	90	120	150
CIRCLING						TIME	MIN:SEC	05:24	04:12	03:09	02:32
		1100 (818)	1150 (868)	1340 (1058)	1440 (1158)		FT/MIN	495	635	850	1060

NOTE:

CHANGES: NEW PROCEDURE.

RECOMMENDED RNAV PROCEDURE CODING

ENKR RNAV(GNSS) RWY 06										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	GOBAD	-	-	-	-	-	A3000+	K230-	-
020	TF	LANLA	-	145(158.4)	-	6.0	-	A3000+	K230-	-
010	IF	OSPOG	-	-	-	-	-	A3000+	K230-	-
020	TF	LANLA	-	325(338.6)	-	5.0	-	A3000+	K230-	-
010	IF	LANLA	-	-	-	-	-	A3000+	K230-	-
020	TF	KR408	-	055(068.5)	-	6.0	-	A3000+	-	-
030	TF	RW06	Y	055(068.5)	-	6.3	-	-	-	-
040	DF	DOGOD	-	-	-	-	-	A3000	-	-
050	HM	DOGOD	-	146(159.5)	-	1 MIN	L	A3000	-	-

Note: Recommended RNAV procedure coding is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.