

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000


MEHAMN

MEHAMN

RNAV(GNSS) RWY 17

TRANSITION ALTITUDE
7000

AFIS: 121.200	AD ELEV: 42	
VDF: 121.200	THR ELEV: 32	DIST IN NM
	HGT RELATED TO THR RWY 17	ELEV, ALT AND HGT IN FT
	CIRCLING HGT RELATED TO AD ELEV	
	BEARINGS ARE MAGNETIC - VAR 13.5 ° E (2015)	

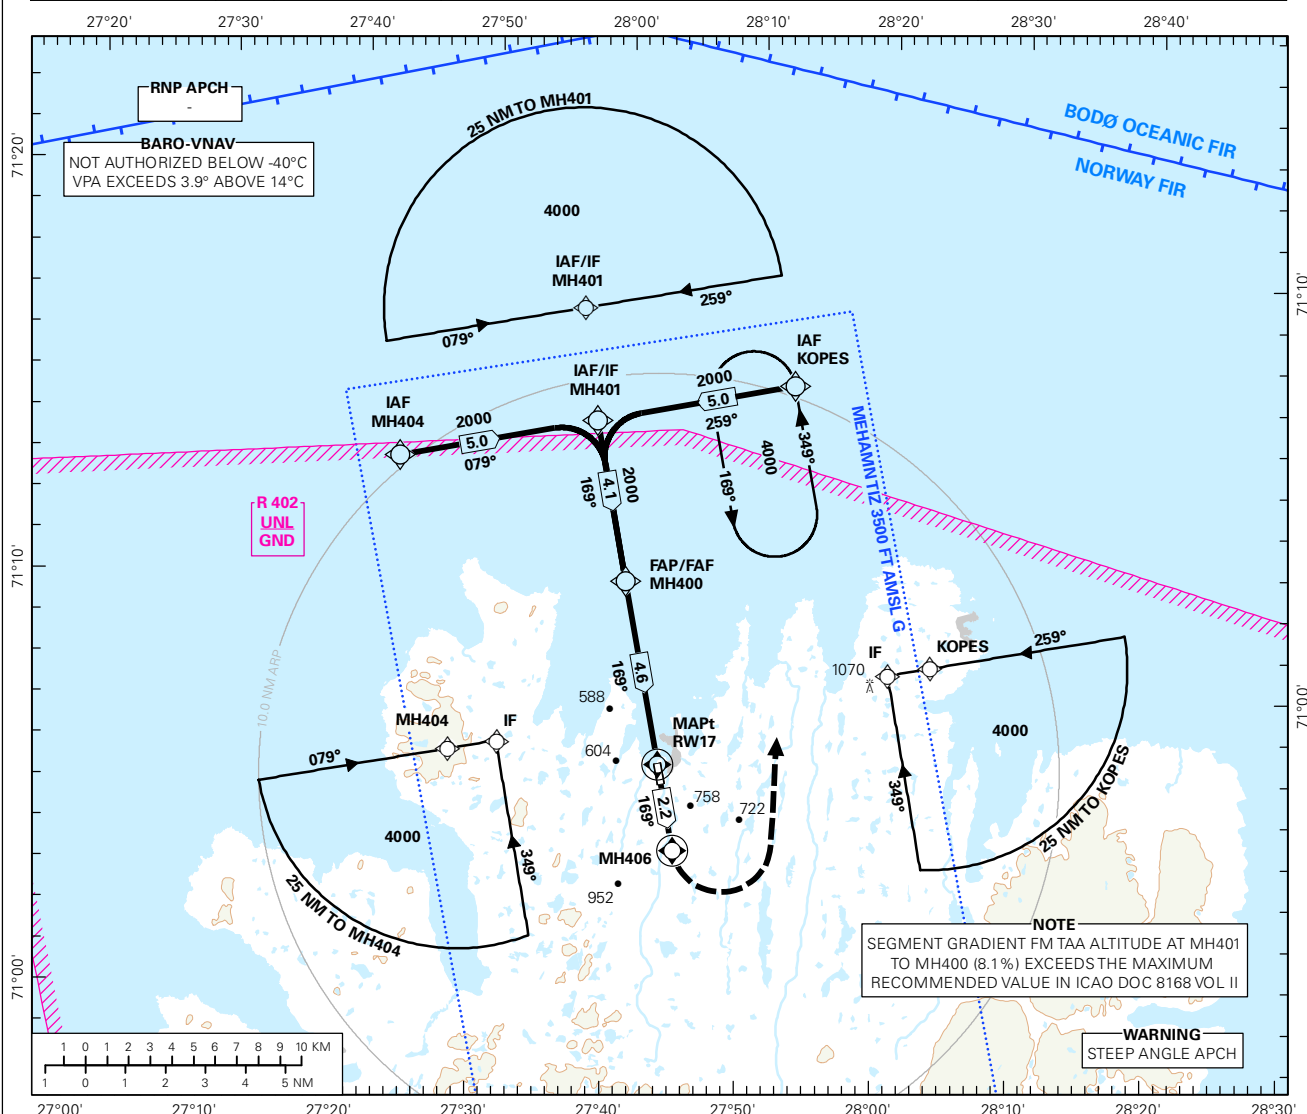

DIST TO RWY17	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	-	-	-	1740 (1708)	1330 (1298)	910 (878)

FMTAA
MH401
4000IAF/IF
MH401FM KOPES/
MH404
2000FAP/FAF
MH400

MISSED APCH:

CLIMB ON TRACK 169° TO MH406.
TURN LEFT DCT KOPES. ENTER KOPES
HLDG CLIMBING TO 4000.

NOTE:

VPA (3.9°) NOT CONSISTENT WITH
PLASI ANGLE (4.5°).MAPt
RWY17

TCH 49

← THR

CAT OF ACFT		A	B	C	D	FINAL APCH					
OCA(H) STRAIGHT - IN	LNAV/VNAV (2.5%)	760 (728)	780 (748)	-	-	DIST FAF - MAPt: 4.6					
	LNAV/VNAV (3.0%)	730 (698)	-	-	-						
	LNAV	930 (898)	-	-	-	SPEED	KT	70	90	100	120
CIRCLING		1100 (1058)	1250 (1208)	-	-	TIME	MIN:SEC	03:59	03:06	02:48	02:20
						ROD	FT/MIN	485	620	690	830

NOTE:

CHANGES: COMPLETE REVISION.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENMH RNAV(GNSS) RWY 17										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	MH404	-	-	-	-	-	A4000+	-	-
020	TF	MH401	-	-	-	5.0	-	A2000+	-	-
010	IF	KOPES	-	-	-	-	-	A4000+	-	-
020	TF	MH401	-	-	-	5.0	-	A2000+	-	-
010	IF	MH401	-	-	-	-	-	A2000+	-	-
020	TF	MH400	-	-	-	4.1	-	A2000+	-	-
030	TF	RW17	Y	-	-	4.6	-	-	-	-3.9/15
040	TF	MH406	Y	-	-	2.2	-	-	-	-
050	DF	KOPES	-	-	-	-	L	-	-	-
060	HM	KOPES	-	349 (002.6)	-	1 MIN	L	A4000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.