

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000


MEHAMN

MEHAMN

RNAV(GNSS) RWY 35

TRANSITION ALTITUDE
7000

AFIS: 121.200	AD ELEV: 42	
VDF: 121.200	THR ELEV: 42	DIST IN NM
	HGT RELATED TO THR RWY 35	ELEV, ALT AND HGT IN FT
	CIRCLING HGT RELATED TO AD ELEV	
	BEARINGS ARE MAGNETIC - VAR 13.5 ° E (2015)	

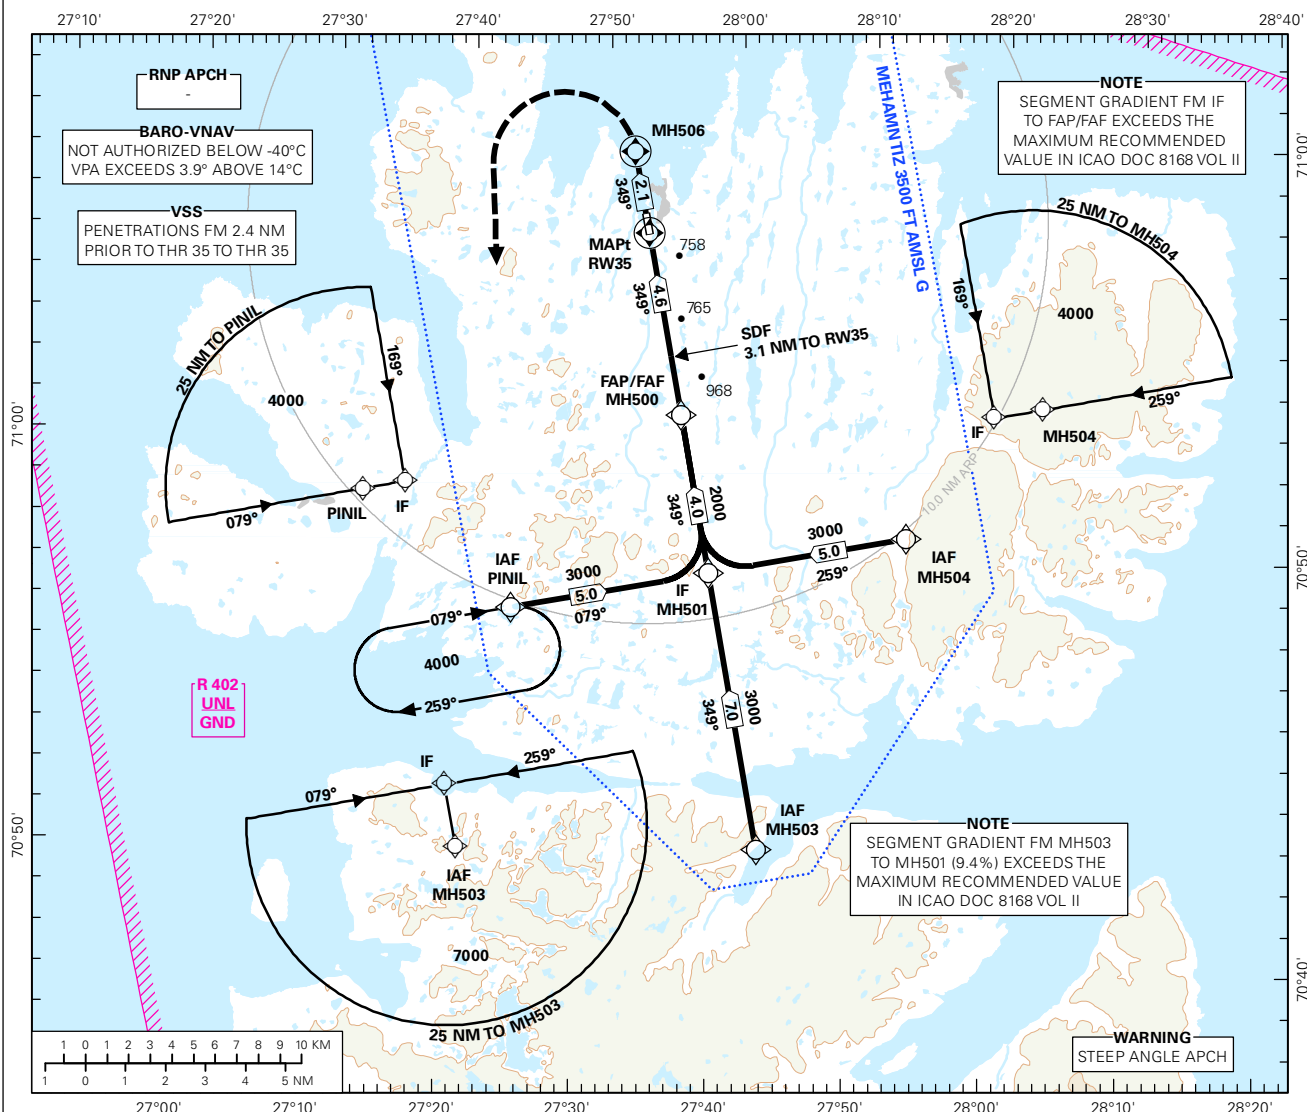


DIST TO RW35	10	9	8	7	6	5	4	3
ALT (HGT)	-	-	-	-	-	-	1750 (1708)	1340 (1298)

MISSED APCH:

CLIMB ON TRACK 349° TO MH506. TURN LEFT DCT PINIL. ENTER PINIL HOLDING CLIMBING TO 4000.

NOTE:

VPA (3.9°) NOT CONSISTENT WITH PLASI ANGLE (4.5°).

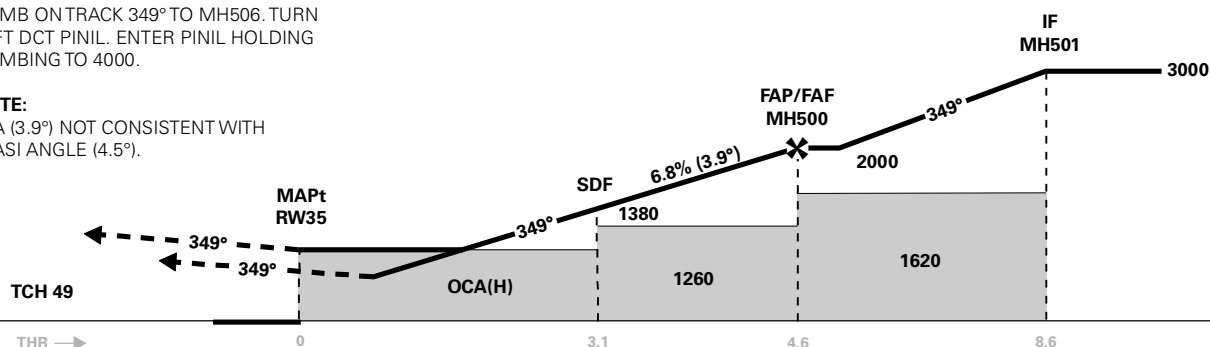

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 4.6					
OCA(H) STRAIGHT - IN	LNAV/VNAV	960 (918)	980 (938)	-	-	SPEED	KT	70	90	100	120
	LNAV	1060 (1018)	-	-	-		FT/MIN	485	620	690	830
CIRCLING		1100 (1058)	1250 (1208)	-	-	TIME	MIN:SEC	03:58	03:05	02:46	02:19
NOTE:							ROD	FT/MIN	485	620	690

CHANGES: COMPLETE REVISION.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENMH RNAV(GNSS) RWY 35										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	MH504	-	-	-	-	-	A4000+	-	-
020	TF	MH501	-	-	-	5.0	-	A3000+	-	-
010	IF	MH503	-	-	-	-	-	A7000+	-	-
020	TF	MH501	-	-	-	7.0	-	A3000+	-	-
010	IF	PINIL	-	-	-	-	-	A4000+	-	-
020	TF	MH501	-	-	-	5.0	-	A3000+	-	-
030	TF	MH500	-	-	-	4.0	-	A2000+	-	-
040	TF	RW35	Y	-	-	4.6	-	-	-	-3.9/15
050	TF	MH506	Y	-	-	2.1	-	-	-	-
060	DF	PINIL	-	-	-	-	L	-	-	-
070	HM	PINIL	-	079 (092.1)	-	1 MIN	R	A4000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.