

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

LAKSELV

BANAK**RNAV(GNSS) RWY 16**TRANSITION ALTITUDE
7000
 ATIS: 136.325
 TWR: 118.900 118.050
 122.100


AD ELEV: 25

THR ELEV: 15


DIST IN NM

 HGT RELATED TO THR RWY 16
 CIRCLING HGT RELATED TO AD ELEV
 BEARINGS ARE MAGNETIC - VAR 11.5 ° E (2015)

ELEV, ALT AND HGT IN FT

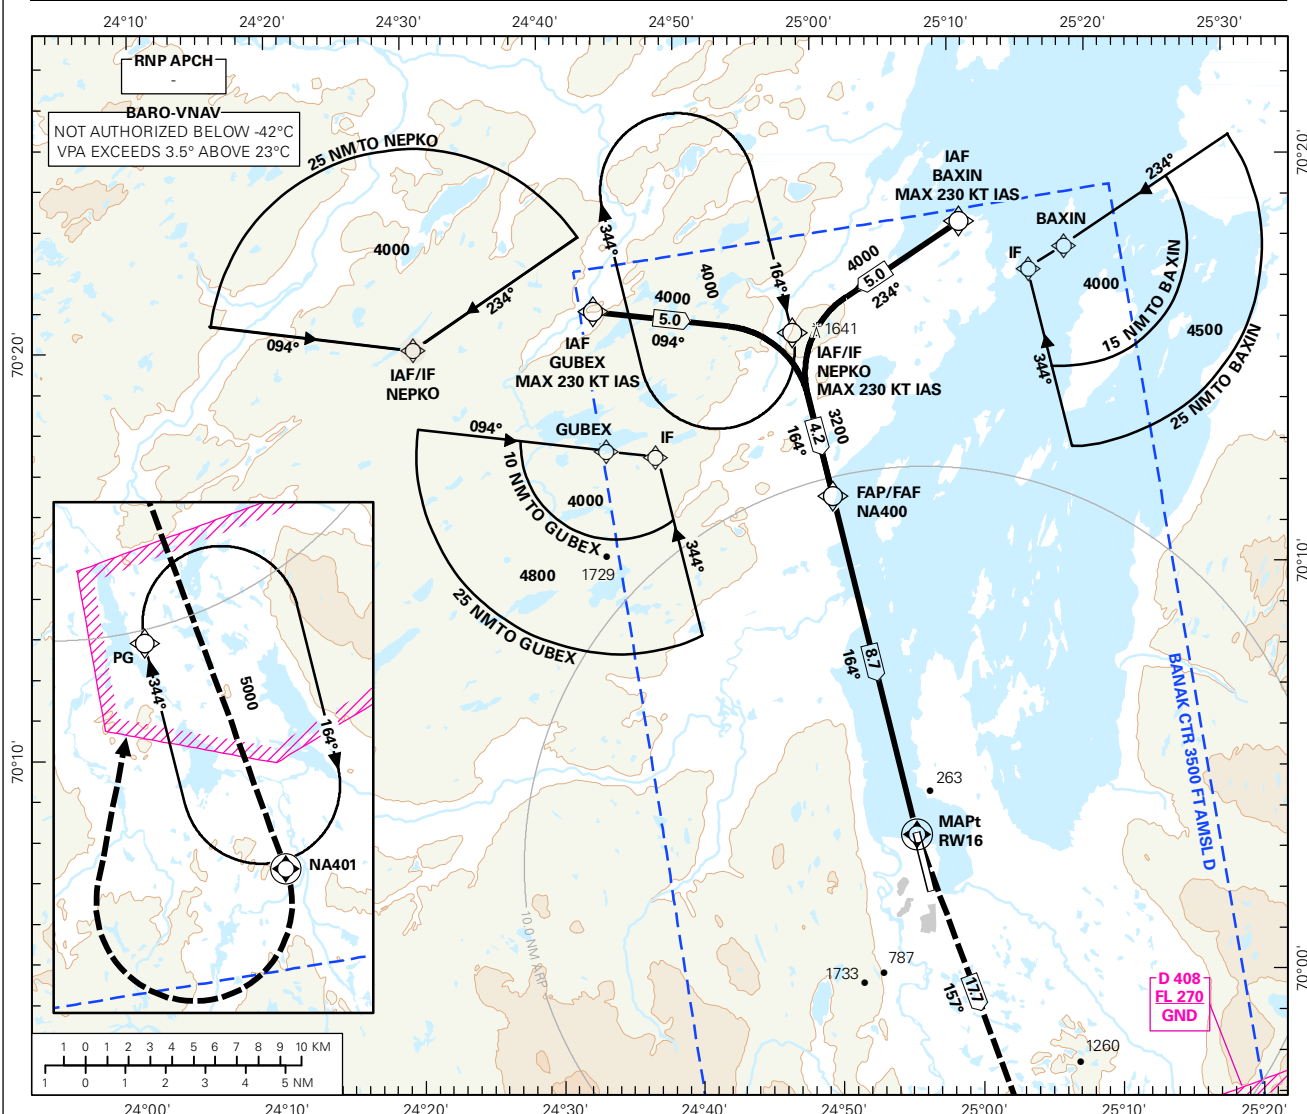

DIST TO RW16	9	8	7	6	5	4	3	2
ALT (HGT)	-	2950 (2935)	2590 (2575)	2230 (2215)	1870 (1855)	1510 (1495)	1150 (1135)	790 (775)

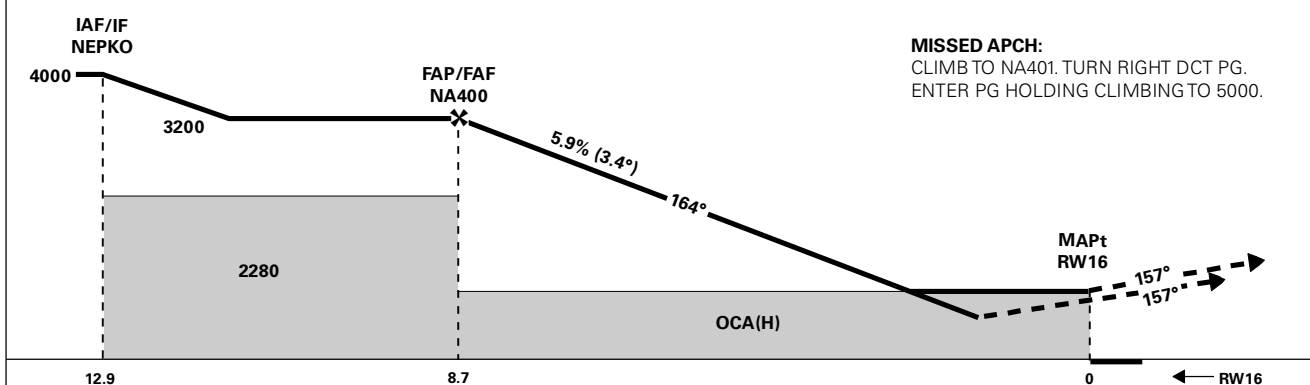**MISSED APCH:**
 CLIMB TO NA401. TURN RIGHT DCT PG.
 ENTER PG HOLDING CLIMBING TO 5000.

CAT OF ACFT		A	B	C	D	FINAL APCH	DIST FAF - MAPt: 8.7					
OCA(H) STRAIGHT - IN	LNAV/VNAV	440 (425)	450 (435)	480 (465)	550 (535)		SPEED	KT	70	90	120	150
	LNAV	500 (485)		510 (495)	550 (535)	MIN:SEC		07:28	05:48	04:21	03:29	02:54
	-	-	-	-	TIME	FT/MIN		420	540	720	900	1080
CIRCLING		670 (645)	970 (945)	1350 (1325)	2050 (2025)	ROD						

NOTE: CIRCLING E OF AD ONLY.

CHANGES: EDITORIALS

Avinor

15 SEP 2016

RECOMMENDED RNAV PROCEDURE CODING

ENNA RNAV(GNSS) RWY 16										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	BAXIN	-	-	-	-	-	A4000+	K230-	-
020	TF	NEPKO	-	234(245.6)	-	5.0	-	A4000+	K230-	-
010	IF	GUBEX	-	-	-	-	-	A4000+	K230-	-
020	TF	NEPKO	-	094(105.2)	-	5.0	-	A4000+	K230-	-
010	IF	NEPKO	-	-	-	-	-	A4000+	K230-	-
020	TF	NA400	-	164(175.4)	-	4.2	-	A3200+	-	-
030	TF	RW16	Y	164(175.4)	-	8.7	-	-	-	-
040	TF	NA401	Y	157(169.0)	-	17.7	-	-	-	-
050	DF	PG	-	-	-	-	R	-	-	-
060	HM	PG	-	344(355.4)	-	1 MIN	R	A5000	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.

Note: NEPKO holding not included in standard APCH transitions.