


ØRSTA-VOLDA

	APP: 129.325	AD ELEV: 243		ØRSTA-VOLDA HOVDEN RNAV(GNSS)-A TRANSITION ALTITUDE 7000
	AFIS: 118.900	THR ELEV:	DIST IN NM	
	VDF: 118.900	HGT RELATED TO AD ELEV	ELEV, ALT AND HGT IN FT	
		CIRCLING HGT RELATED TO AD ELEV		
		BEARINGS ARE MAGNETIC - VAR 0.5 ° E (2015)		

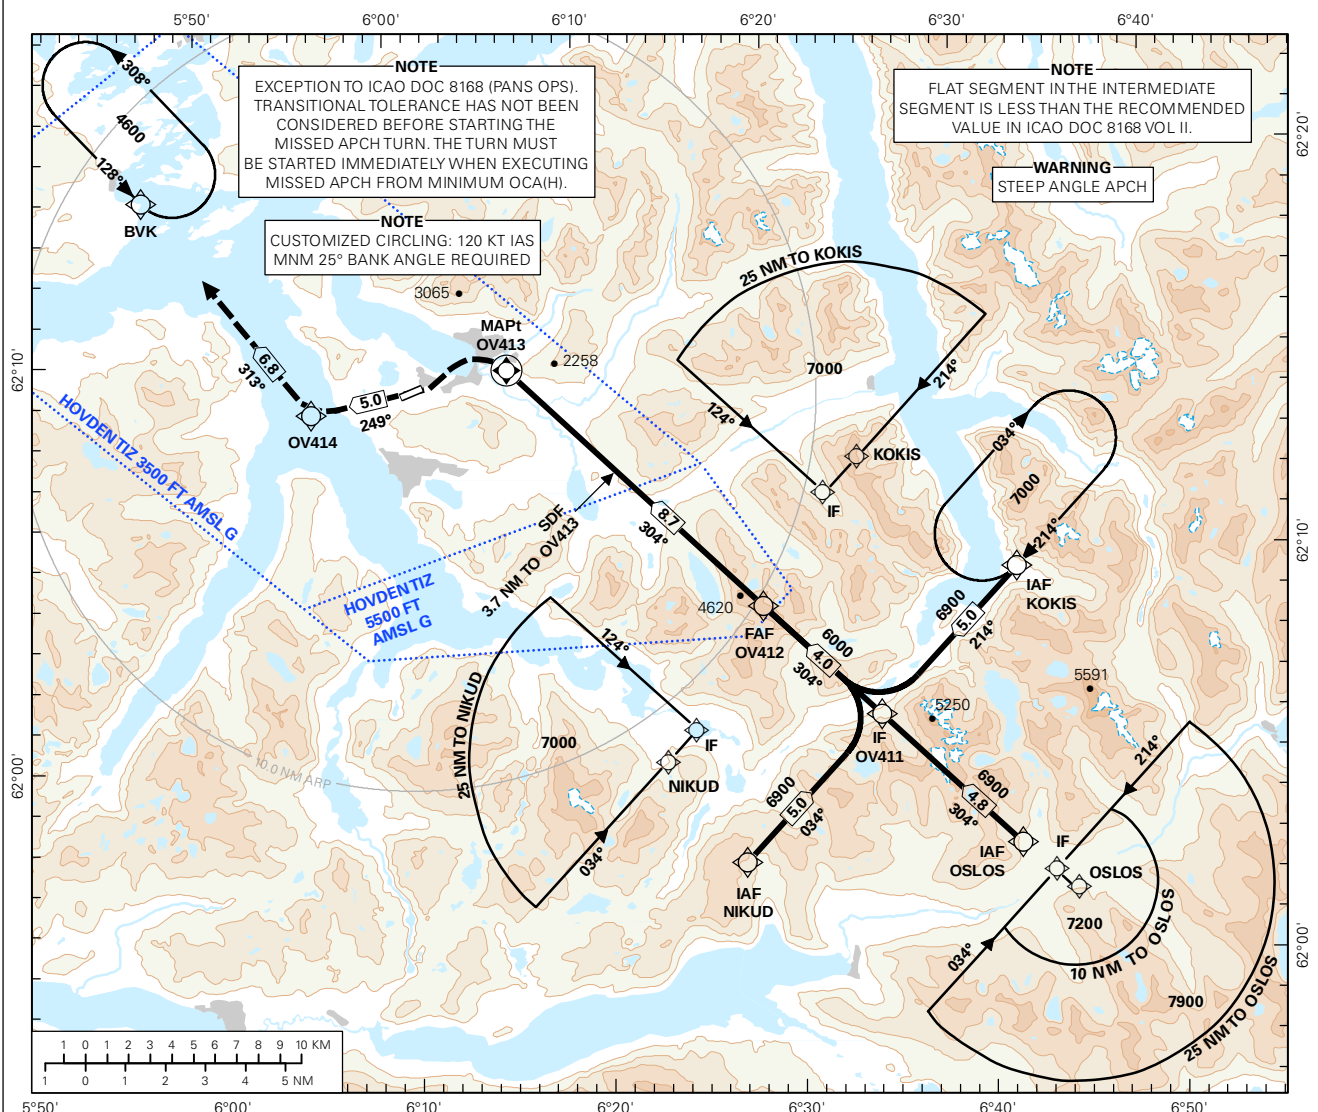


DIST TO OV413	8	7	6	5	4	3	2	1
ALT (HGT)	5710 (5467)	5290 (5047)	4860 (4617)	4440 (4197)	4010 (3767)	3590 (3347)	3160 (2917)	2740 (2497)

AT OV413 TURN LEFT TO OV414. TO BVK.
ENTER BVK HOLDING CLIMBING TO 4600.

MAX 130 KT IAS DURING THE FIRST TURN.

EXCEPTION TO DOC 8168: DESCENT GRADIENT
COMPUTED FROM FAF TO MAPt.

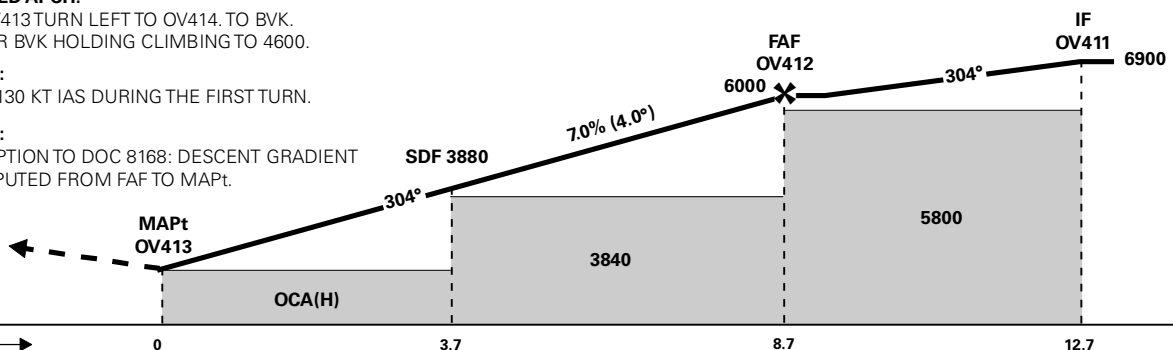

CAT OF ACFT		A	B	C	D	FINAL APCH		DIST FAF - MAPt: 8.7					
OCA(H) STRAIGHT - IN	-	-	-	-	-								
CIRCLING	2.5%	2310 (2067)	3430 (3187)	-	-	SPEED	KT	70	90	100	120	130	
	2.5%*	-	2380 (2137)	-	-	TIME	MIN:SEC	07:27	05:48	05:13	04:21	04:01	
	4.0%*	-	2310 (2067)	-	-	ROD	FT/MIN	495	635	710	850	920	

NOTE: CIRCLING N OF AD ONLY. * CUSTOMIZED CIRCLING.

RECOMMENDED RNAV PROCEDURE CODING

ENOV RNAV(GNSS)-A										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/ TCH
010	IF	NIKUD	-	-	-	-	-	A7000+	-	-
020	TF	OV411	-	034 (034.5)	-	5.0	-	A6900+	-	-
010	IF	KOKIS	-	-	-	-	-	A7000+	-	-
020	TF	OV411	-	214 (214.7)	-	5.0	-	A6900+	-	-
010	IF	OSLOS	-	-	-	-	-	A9000+	-	-
020	TF	OV411	-	304 (304.8)	-	4.8	-	A6900+	-	-
030	TF	OV412	-	304 (304.7)	-	4.0	-	A6000+	-	-
040	TF	OV413	Y	304 (304.9)	-	8.7	-	-	-	-
050	TF	OV414	-	249 (249.0)	-	5.0	-	-	K130-	-
060	TF	BVK	-	313 (313.2)	-	6.8	-	A4600	-	-
070	HM	BVK		128 (128.0)	-	1 MIN	L	A4600+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.