


	ATIS: 136.350	AERODROME ELEVATION: 2053 FT	
	TWR: 120.400	THR ELEVATION: 2051 FT	DIST IN NM
	VDF: 120.400	HGT RELATED TO THR RWY 32	ELEV, ALT AND HGT IN FT
		CIRCLING HGT RELATED TO AD ELEV	
		BEARINGS ARE MAGNETIC - VAR 3.0 ° E (2015)	

RØROS**RNAV_(GNSS) RWY 32**


TRANSITION ALTITUDE
7000

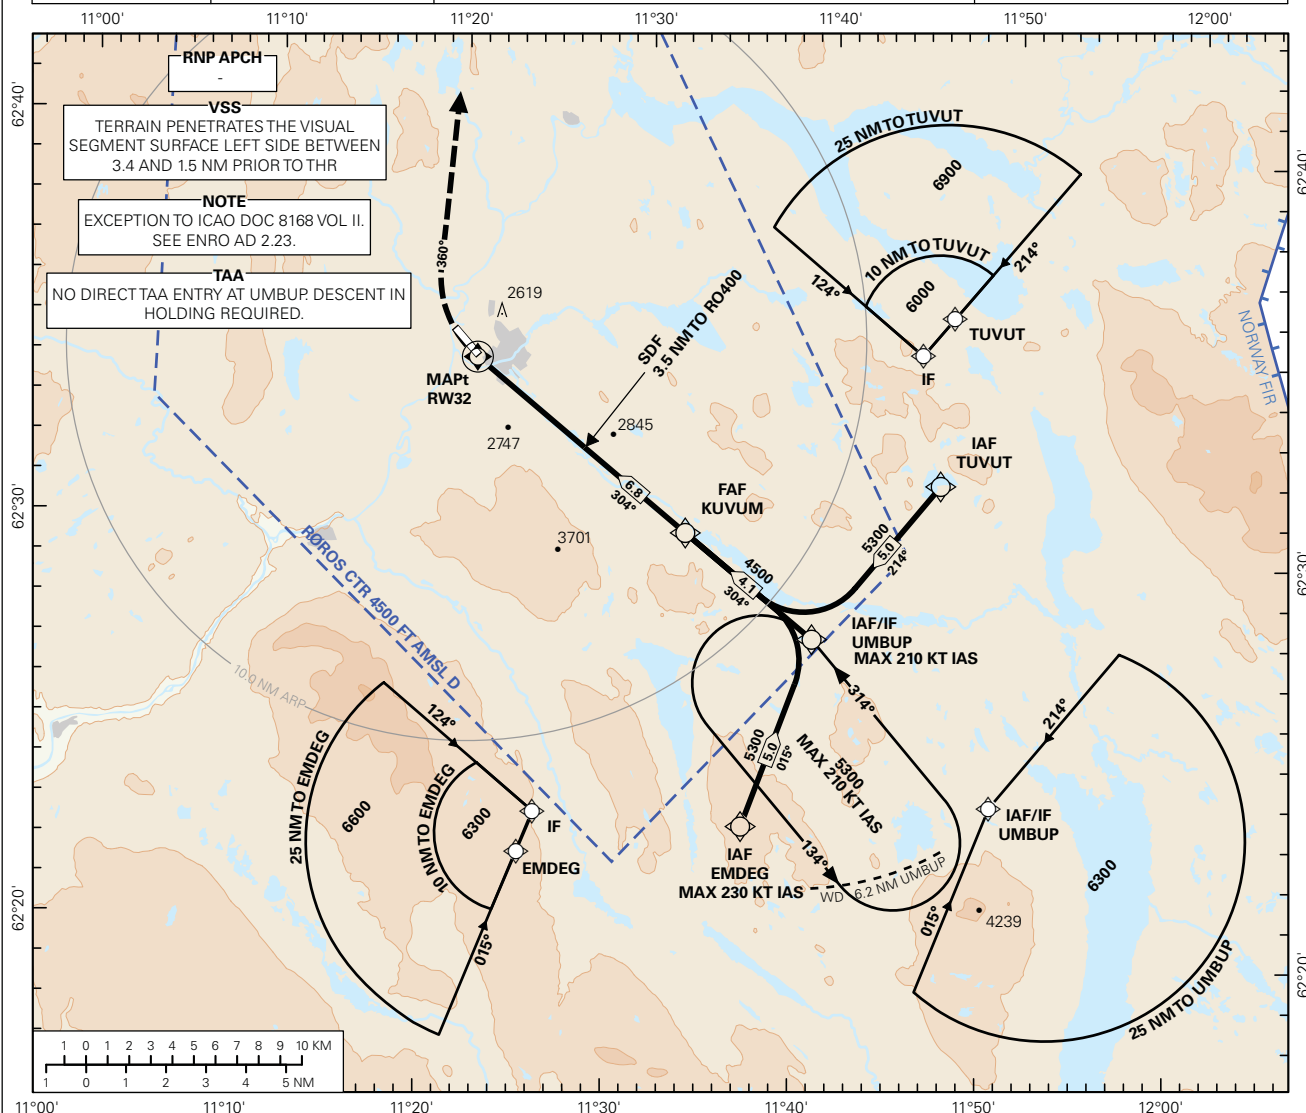

DIST TO RO400	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	4220 (2169)	3870 (1819)	3520 (1469)	3160 (1109)	-	-

PROCEDURE OFFSET: 9°

AT MAPt, TURN RIGHT TO 360° AND
CLIMB TO 6000. STATE INTENTIONS TO ATC.

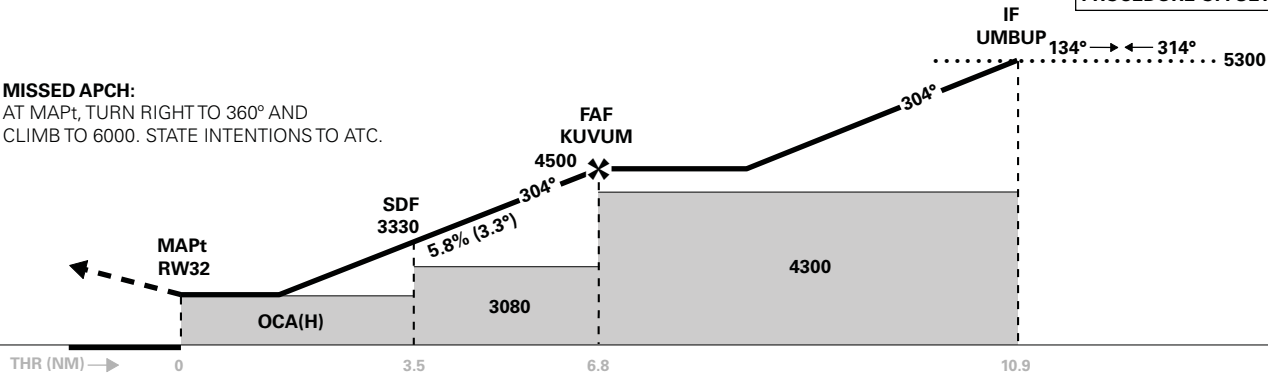

CAT OF ACFT		A	B	C	D	FINAL APPROACH	DIST FM FAF - MAPt: 6.8 NM						
OCA(H) STRAIGHT - IN	LNAV	2860 (809)			-		SPEED	KT	70	90	120	150	180
	-	-	-	-	-	TIME		MIN:SEC	05:50	04:33	03:25	02:44	-
	-	-	-	-	-	-		FT/MIN	412	530	706	882	-
CIRCLING		3020 (967)	3220 (1167)	3500 (1447)	-	ROD	FT/MIN	412	530	706	882	-	

NOTE: CIRCLING N OF AD ONLY.

RECOMMENDED RNAV PROCEDURE CODING

ENRO RNAV(GNSS) RWY 32										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
10	IF	EMDEG	-	-	-	-	-	A6300+	K230-	-
20	TF	UMBUP	-	015 (017.9)	-	5.0	-	A5300+	K210-	-
10	IF	TUVUT	-	-	-	-	-	A5300+	-	-
20	TF	UMBUP	-	214 (217.4)	-	5.0	-	A5300+	K210-	-
10	IF	UMBUP	-	-	-	-	-	A5300+	K210-	-
20	TF	KUVUM	-	304 (307.3)	-	4.1	-	A4500+	-	-
30	TF	RW32	Y	304 (307.3)	-	6.8	-	-	-	-
40	CA	-	-	360 (003.0)	-	-	-	A6000	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.