

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000


VARDØ

SVARTNES

RNAV(GNSS) Y RWY 33


TRANSITION ALTITUDE
7000

3₂ MSA 25 NM ARP	AFIS: 122.150	AD ELEV: 42		VARØ SVARTNES RNAV(GNSS) Y RWY 33 TRANSITION ALTITUDE 7000
	VDF: 122.150	THR ELEV: 24	DIST IN NM	
		HGT RELATED TO THR RWY 33	ELEV, ALT AND HGT IN FT	
	CIRCLING HGT RELATED TO AD ELEV			
	BEARINGS ARE MAGNETIC - VAR 15.0 ° E (2015)			

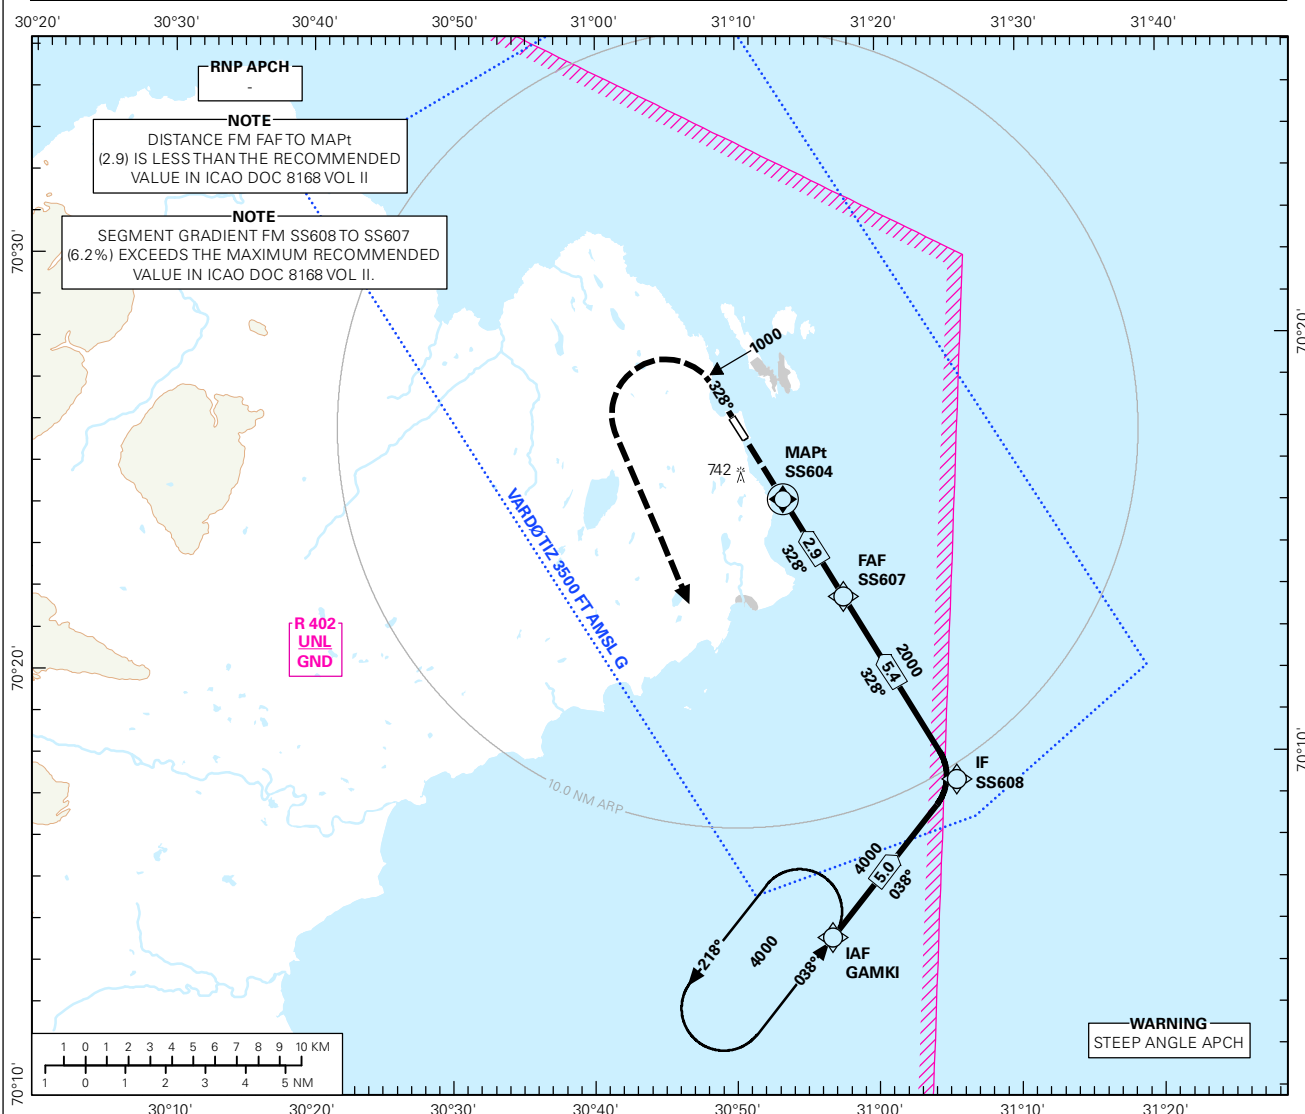

DIST TO SS604	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	-	-	-	-	1650 (1626)	1240 (1216)

MISSED APCH:
CLIMB ON COURSE 328°. AT 1000
TURN LEFT DCT GAMKI. ENTER GAMKI
HLDG CLIMBING TO 4000.

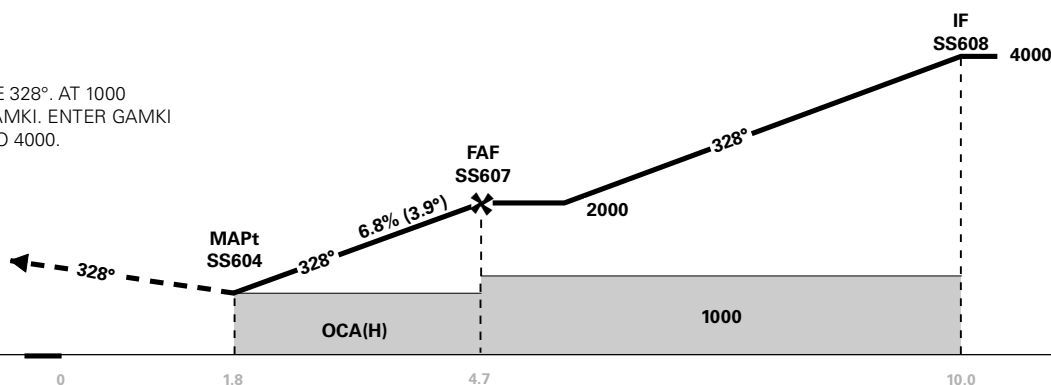

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 2.9					
OCA(H)	2.5%*	800 (776)	830 (806)	-	-	SPEED	KT	70	90	100	120
STRAIGHT - IN	4.0%*	780 (756)	820 (796)	-	-		TIME	MIN:SEC	02:27	01:54	01:43
CIRCLING		1040 (998)	-	-	-	ROD	FT/MIN	485	625	690	830

NOTE: *MNM MISSED APCH CLIMB GRADIENT.

CHANGES: MAGNETIC VARIATION, EDITORIALS, PAGE NUMBERING.

RECOMMENDED RNAV PROCEDURE CODING

ENSS RNAV(GNSS) Y RWY 33										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	GAMKI	-	-	-	-	-	A4000+	-	-
020	TF	SS608	-	-	-	5.0	-	A4000+	-	-
030	TF	SS607	-	-	-	5.3	-	A2000+	-	-
040	TF	SS604	Y	-	-	2.8	-	-	-	-
050	CA	-	-	328(343.3)	-	-	-	A1000	-	-
060	DF	GAMKI	-	-	-	-	L	A4000	-	-
070	HM	GAMKI	-	038(053.3)	-	1 MIN	L	A4000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.