


INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000


VARDØ

SVARTNES


RNAV(GNSS) RWY 15

TRANSITION ALTITUDE
7000

	AFIS: 122.150	AD ELEV: 42	DIST IN NM
	VDF: 122.150	THR ELEV: 42	
	HGT RELATED TO THR RWY 15		ELEV, ALT AND HGT IN FT
	CIRCLING HGT RELATED TO AD ELEV		
	BEARINGS ARE MAGNETIC - VAR 15.0 ° E (2015)		

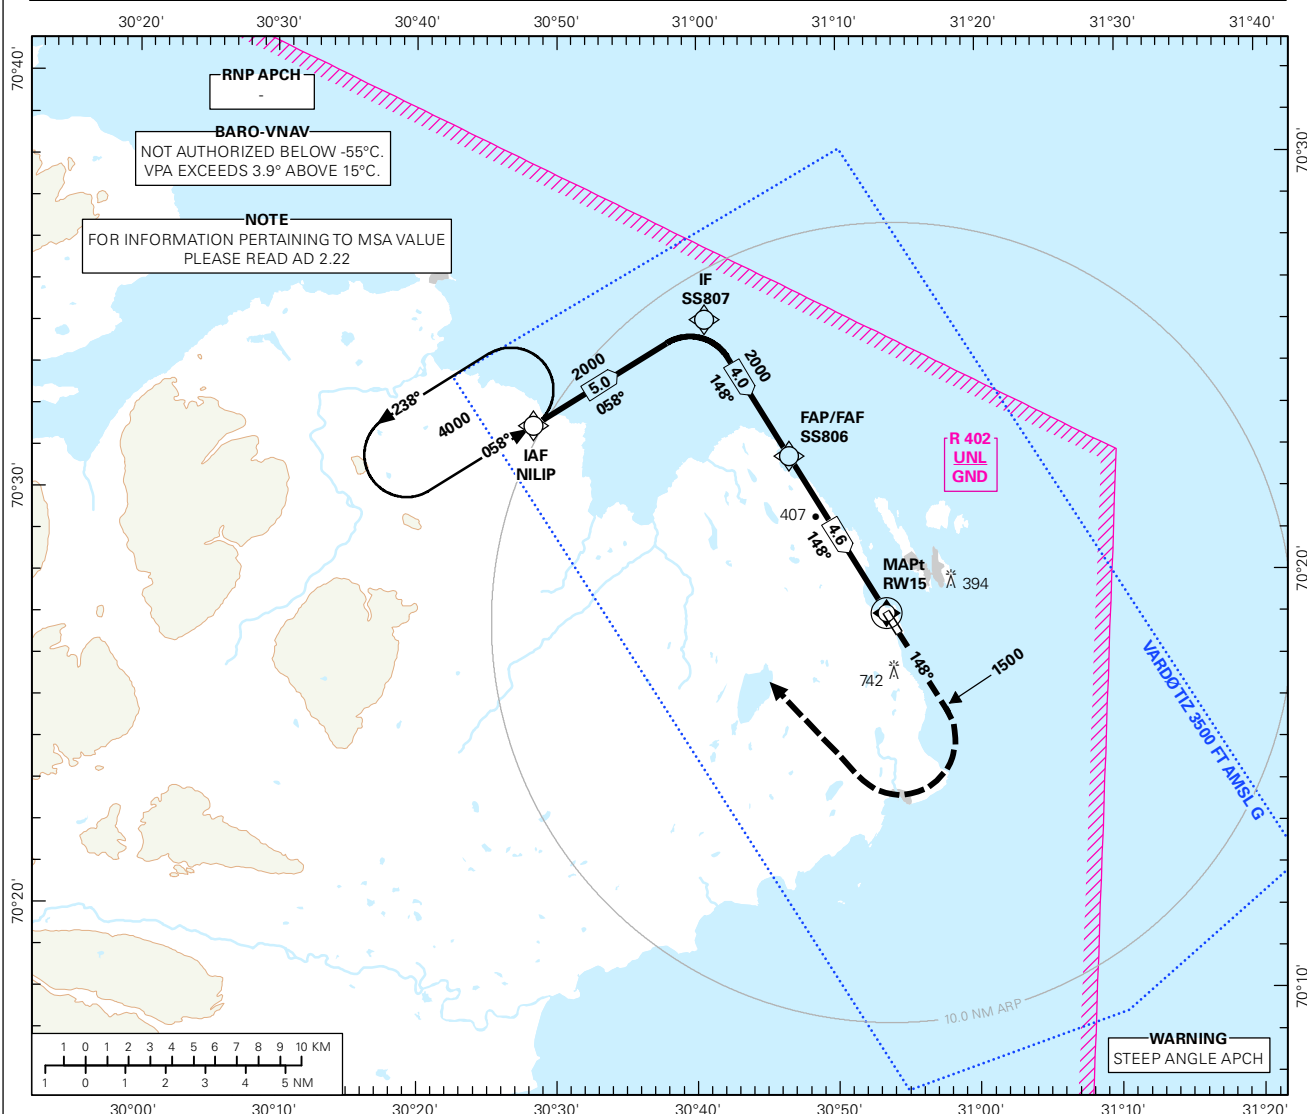

DIST TO RW15	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	-	-	-	1760 (1718)	1340 (1298)	930 (888)

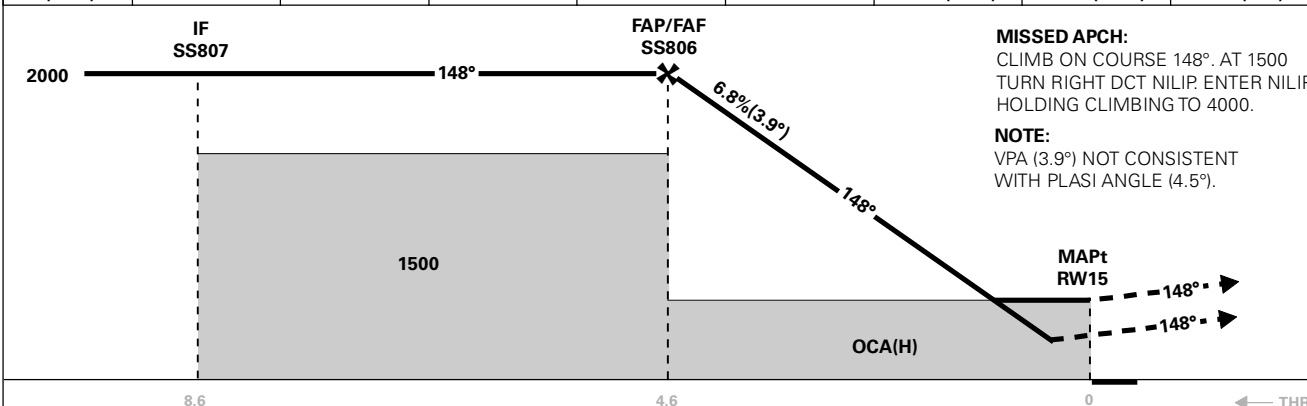

CAT OF ACFT		A	B	C	D	FINAL APCH	DIST FAF - MAPt: 4.6						
OCA(H) STRAIGHT - IN	LNNAV/VNAV 2.5%*	620 (578)	630 (588)	-	-		SPEED	KT	70	90	100	120	130
	LNNAV/VNAV 3.0%*	580 (538)	590 (548)	-	-	TIME		MIN:SEC	03:57	03:04	02:46	02:18	02:08
	LNNAV/VNAV 4.0%*	510 (468)	530 (488)	-	-		ROD	FT/MIN	485	625	690	830	900
	LNNAV/VNAV 5.0%*	470 (428)		-	-								
	LNNAV 2.5%*	770 (728)	800 (758)	-	-								
	LNNAV 4.0%*	730 (688)	770 (728)	-	-								
LNNAV 5.0%*	710 (668)	750 (708)	-	-									
CIRCLING		1040 (998)		-	-								

NOTE: *MNM MISSED APCH CLIMB GRADIENT.

CHANGES: LNAV/VNAV MINIMA, MAGNETIC VARIATION, EDITORIALS

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENSS RNAV(GNSS) RWY 15										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	NILIP	-	-	-	-	-	A4000+	-	-
020	TF	SS807	-	-	-	5.0	-	A2000+	-	-
030	TF	SS806	-	-	-	4.0	-	A2000+	-	-
040	TF	RW15	Y	-	-	4.6	-	-	-	-3.9/15
050	CA	-	-	148 (163.3)	-	-	-	A1500	-	-
060	DF	NILIP	-	-	-	-	R	-	-	-
070	HM	NILIP	-	058 (072.9)	-	1 MIN	L	A4000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.