



INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

VARDØ

SVARTNES

GLS RWY 33


	AFIS: 122.150	AD ELEV: 42	
	VDF: 122.150	THR ELEV: 24	DIST IN NM
		HGT RELATED TO THR RWY 33	ELEV, ALT AND HGT IN FT
		CIRCLING HGT RELATED TO AD ELEV	
MSA 25 NM ARP		BEARINGS ARE MAGNETIC - VAR 15.0 ° E (2015)	
		TRANSITION ALTITUDE 7000	

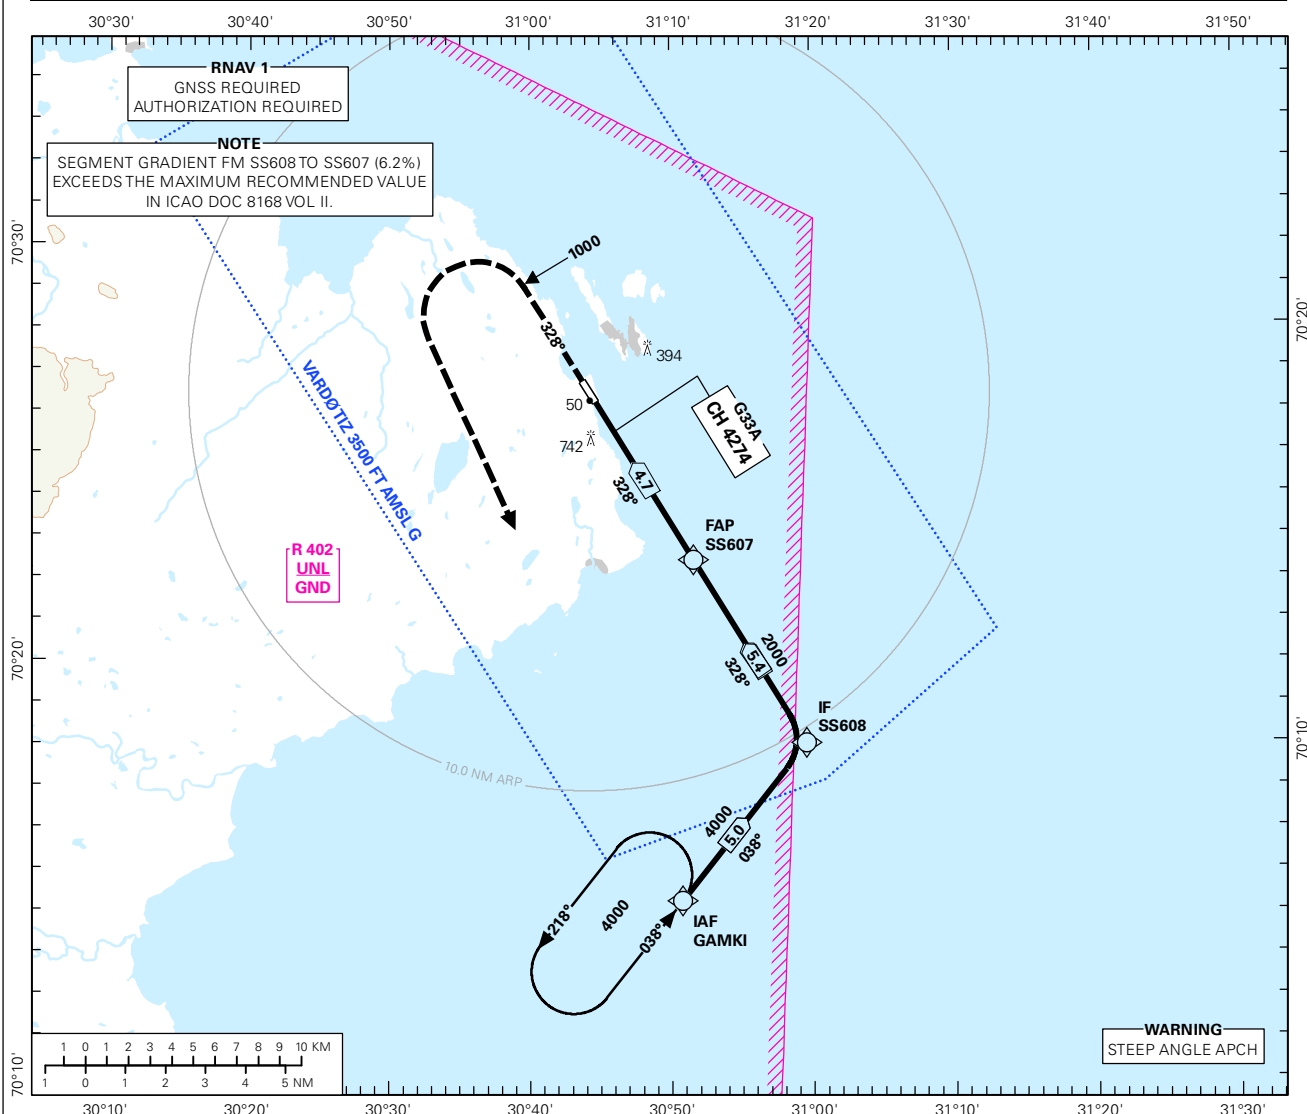

DIST TO THR	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	-	-	1744 (1720)	1324 (1300)	905 (881)	488 (464)

MISSED APCH:
CLIMB ON COURSE 328°. AT 1000
TURN LEFT DCT GAMKI. ENTER GAMKI
HOLD CLIMBING TO 4000.

NOTE:
GP ANGLE (3.9°) NOT CONSISTENT
WITH PLASI ANGLE (4.5°).

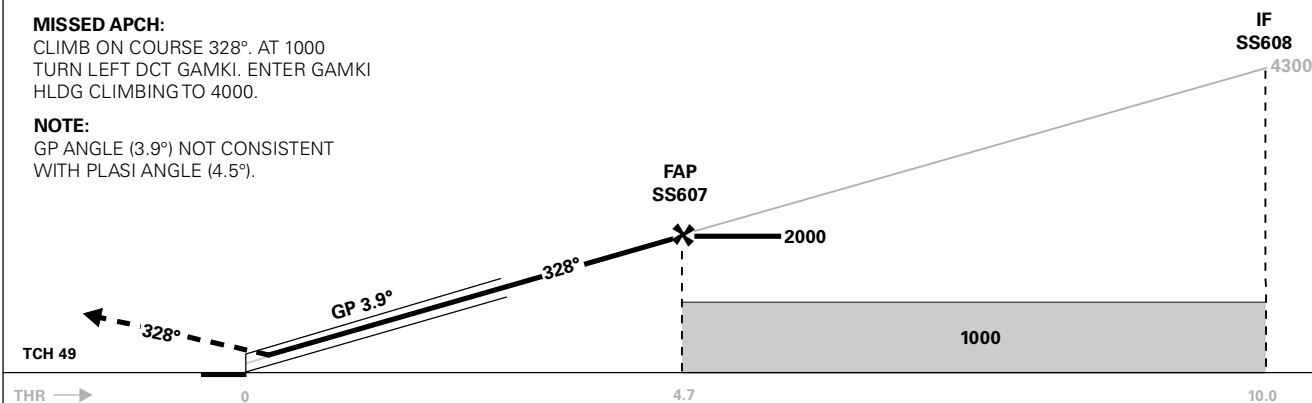

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAP - THR: 4.7				
OCA(H)	2.5%*	245 (221)	265 (241)	-	-	SPEED	KT	70	90	100
SCAT-I		-	-	-	-	TIME	MIN:SEC	-	-	-
CIRCLING		1040 (998)	-	-	-	ROD	FT/MIN	485	620	690

NOTE: *MNM MISSED APCH CLIMB GRADIENT.

CHANGES: MAGNETIC VARIATION, EDITORIALS.

Avinor

02 FEB 2017

SCAT-I: Special CAT-I, REF AIP Norge, GEN 1.5 and AD 1.1 paragraf 6.3

Det kreves spesiell godkjenning fra Luftfartstilsynet for å kunne bruke SCAT-I prosedyrer operativt.

Beslutningshøyder (DH) under 400 FT skal ikke brukes.

GLS VHF-data sendes på FREQ 116.200 MHZ

Under planlegging av en GLS presisjonsinnflyging skal piloter kontrollere at prosedyren vil være tilgjengelig. Mangel på GPS-signal og feil ved bakkestasjonen vil bli publisert ved bruk av NOTAM. Tekst som benyttes ved varslet mangelfull GNSS-dekning vil være "SCAT-I GPS OUTAGE PREDICTED".

Meldepunkt-koordinater er publisert i ENR 4.4

SCAT-I: Special CAT-I, REF AIP Norway, GEN 1.5 and AD 1.1 paragraph 6.3

Special authorization from the Norwegian Civil Aviation Authority is required prior to operational use of SCAT-I procedures.

Decision heights (DH) below 400 FT shall not be used.

GLS VHF data is transmitted on FREQ 116.200 MHZ.

When planning a GLS precision approach pilots shall check the availability of the instrument approach procedure. Predicted GPS outages and ground station irregularities will be published using NOTAM. Text used when insufficient GNSS coverage has been predicted will be "SCAT-I GPS OUTAGE PREDICTED".

Waypoint coordinates are published in ENR 4.4