


INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000


VARDØ

SVARTNES

RNAV(GNSS) Z RWY 33

TRANSITION ALTITUDE
7000

	AFIS: 122.150	AD ELEV: 42	
	APP: 122.150	THR ELEV: 24	DIST IN NM
		HGT RELATED TO THR RWY 33	ELEV, ALT AND HGT IN FT
		CIRCLING HGT RELATED TO AD ELEV	
		BEARINGS ARE MAGNETIC - VAR 15.0 ° E (2015)	

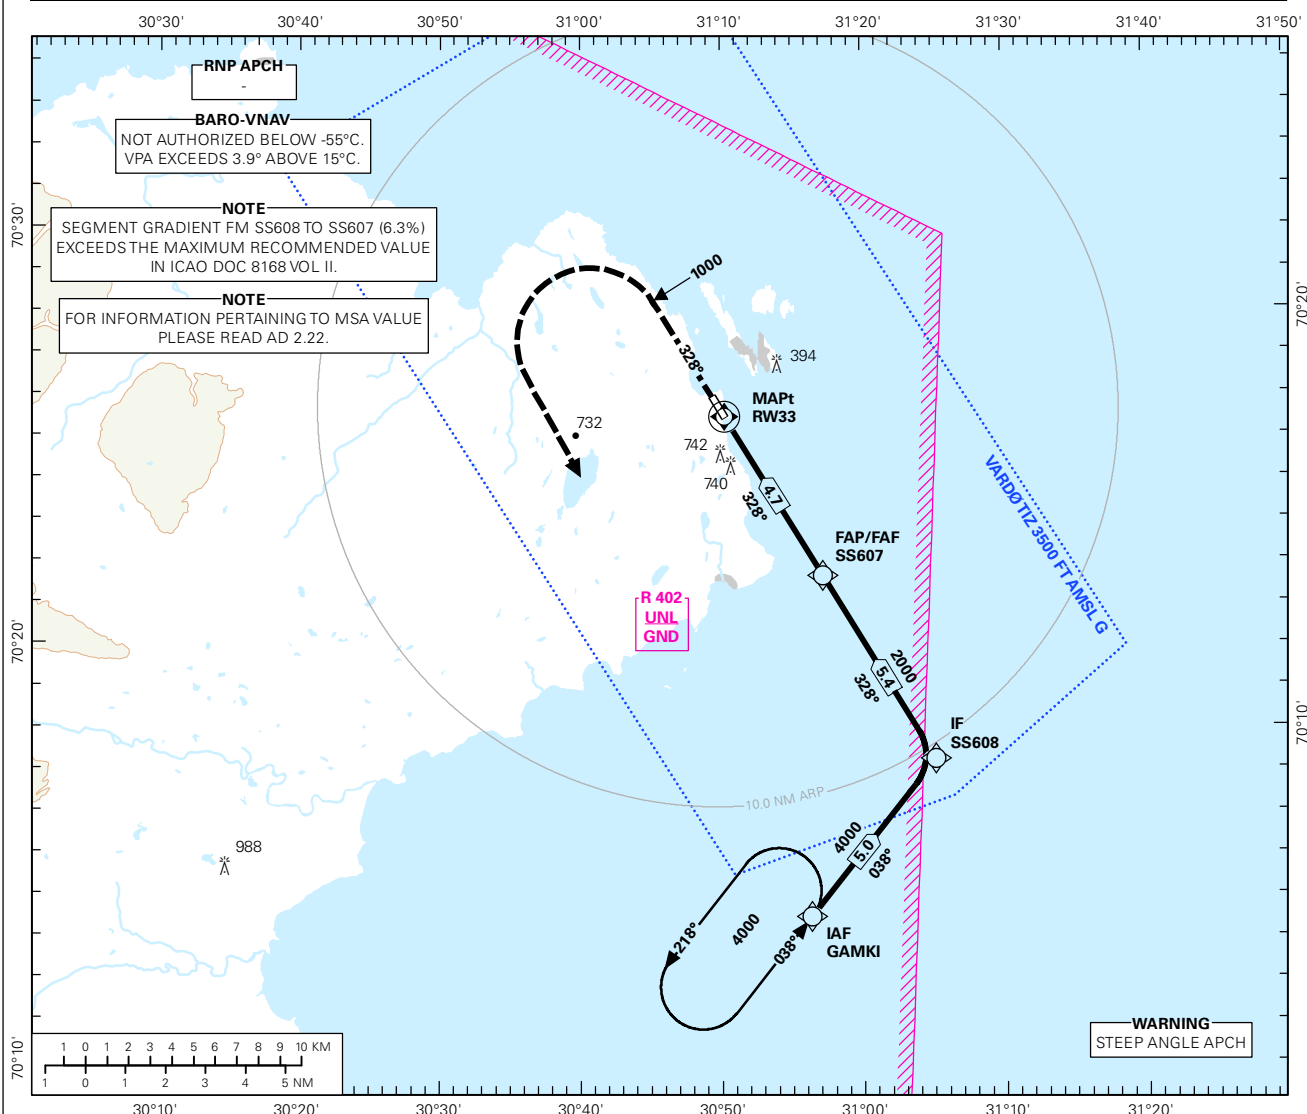


DIST TO RW33	10	9	8	7	6	5	4	3
ALT (HGT)	-	-	-	-	-	-	1740 (1716)	1320 (1296)

MISSED APCH:

CLIMB ON COURSE 328° TO 1000.
TURN LEFT DCT GAMKI.
ENTER GAMKI HOLDING CLIMBING TO 4000.

NOTE:

VPA (3.9°) NOT CONSISTENT
WITH PLASI ANGLE (4.5°).

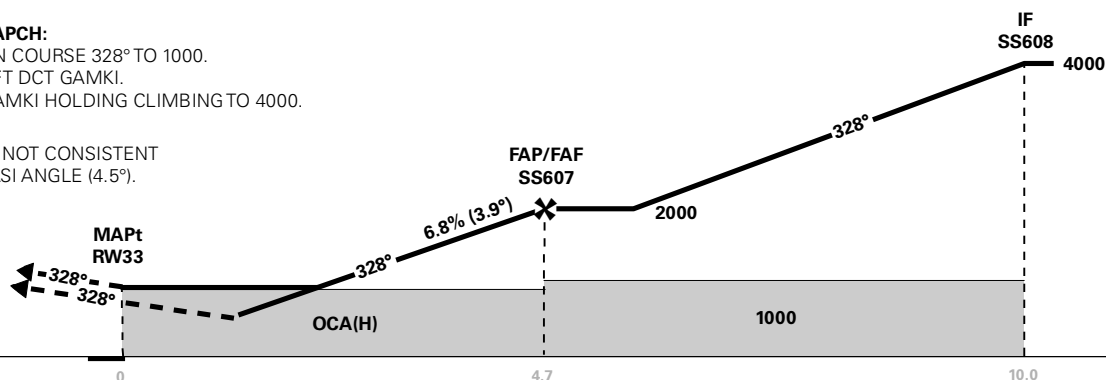

CAT OF ACFT		A	B	C	D	FINAL APCH		DIST FAF - MAPt: 4.7					
OCA(H)	LNAV/VNAV	880 (856)	900 (876)	-	-	SPEED	KT	70	90	100	120	130	
	LNAV	980 (956)	-	-	-								
CIRCLING		1040 (998)	-	-	-	TIME	MIN:SEC	04:00	03:06	02:48	02:20	02:09	
						ROD	FT/MIN	485	620	690	830	900	

NOTE:

CHANGES: NEW PROCEDURE.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENSS RNAV(GNSS) Z RWY 33										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	GAMKI	-	-	-	-	-	A4000+	-	-
020	TF	SS608	-	-	-	5.0	-	A4000+	-	-
030	TF	SS607	-	-	-	5.4	-	A2000+	-	-
040	TF	RW33	Y	-	-	4.7	-	-	-	-3.9/15
050	CA	-	-	328(343.3)	-	-	-	A1000	-	-
060	DF	GAMKI	-	-	-	-	L	-	-	-
070	HM	GAMKI	-	038(053.1)	-	1 MIN	L	A4000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.