


SANDNESSJØEN

STOKKA


RNAV(GNSS)- A

TRANSITION ALTITUDE
7000

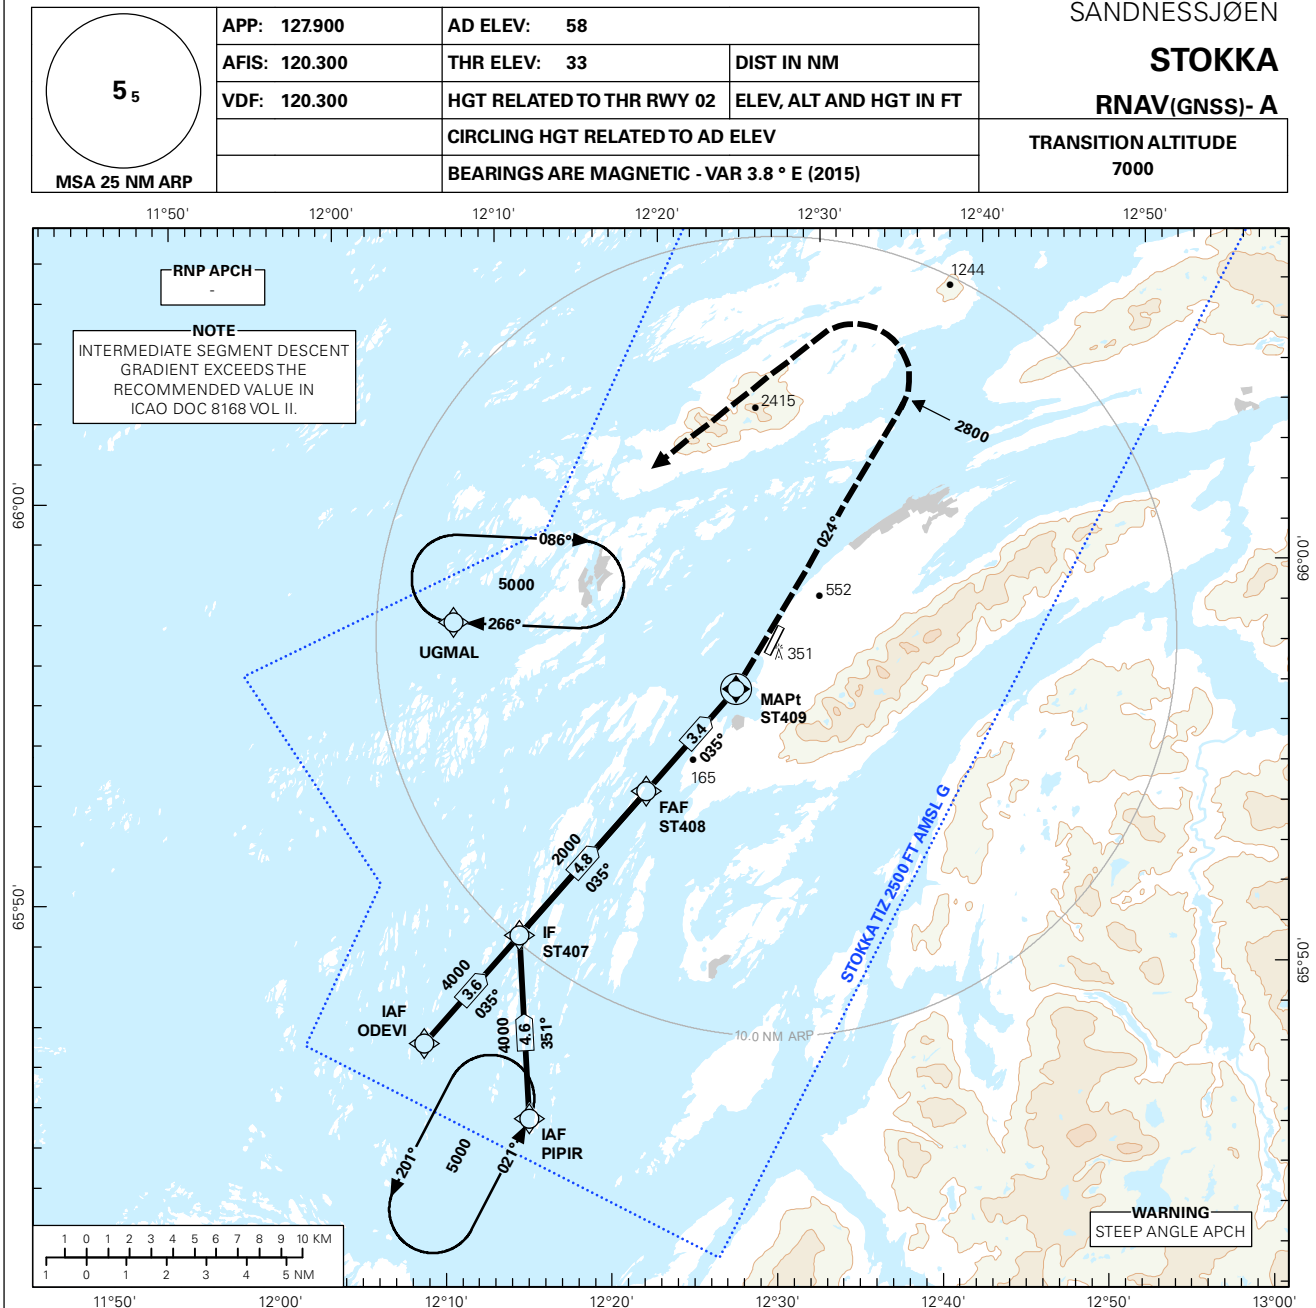

DIST TO ST409	8	7	6	5	4	3	2	1
ALT (HGT)	-	-	-	-	-	1840 (1782)	1430 (1372)	1020 (962)

PROCEDURE OFFSET: 11°

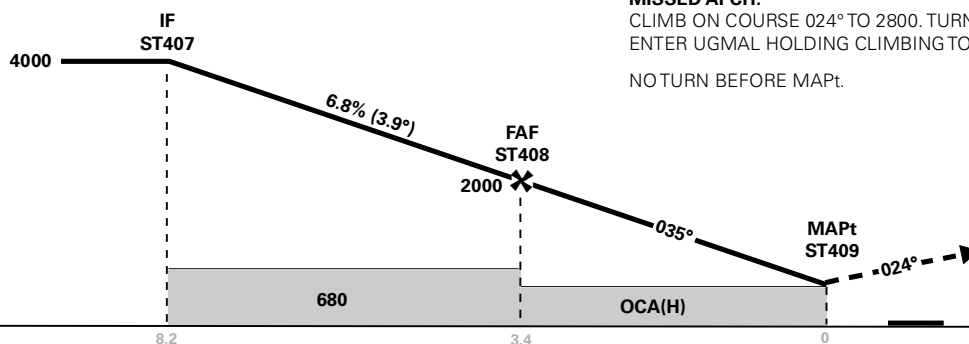

CAT OF ACFT		A	B	C	D	FINAL APCH	DIST FAF - ST409: 3.4					
CIRCLING		490 (432)	720 (662)	-	-							
		-	-	-	-	SPEED	KT	70	90	100	120	130
		-	-	-	-	TIME	MIN:SEC	02:55	02:16	02:03	01:42	01:35
		-	-	-	-	ROD	FT/MIN	480	620	690	825	890
		-	-	-	-							

NOTE: CIRCLING W OF AD ONLY.

CHANGES: RWY ID.

Avinor

15 SEP 2016

RECOMMENDED RNAV PROCEDURE CODING

ENST RNAV(GNSS)-A										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	ODEVI	-	-	-	-	-	A5100+	-	-
020	TF	ST407	-	035 (038.8)	-	3.6	-	A4000+	-	-
010	IF	PIPIR	-	-	-	-	-	A5000+	-	-
020	TF	ST407	-	351 (354.4)	-	4.6	-	A4000+	-	-
030	TF	ST408	-	035 (038.8)	-	4.8	-	A2000+	-	-
040	TF	ST409	Y	035 (038.9)	-	3.4	-	-	-	-
050	CA	-	-	024 (028.0)	-	-	-	A2800+	-	-
060	DF	UGMAL	-	-	-	-	L	A5000	-	-
070	HM	UGMAL	-	266 (269.9)	-	1 MIN	R	A5000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.