

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000


TROMSØ

LANGNES

RNAV(GNSS) RWY 19

TRANSITION ALTITUDE
7000

ATIS: 126.125	AD ELEV: 32	
APP: 123.750	THR ELEV: 15	DIST IN NM
TWR: 118.300 (122.100)	HGT RELATED TO THR RWY 19	ELEV, ALT AND HGT IN FT
VDF: 123.750	CIRCLING HGT RELATED TO AD ELEV	
	BEARINGS ARE MAGNETIC - VAR 8.0 ° E (2015)	

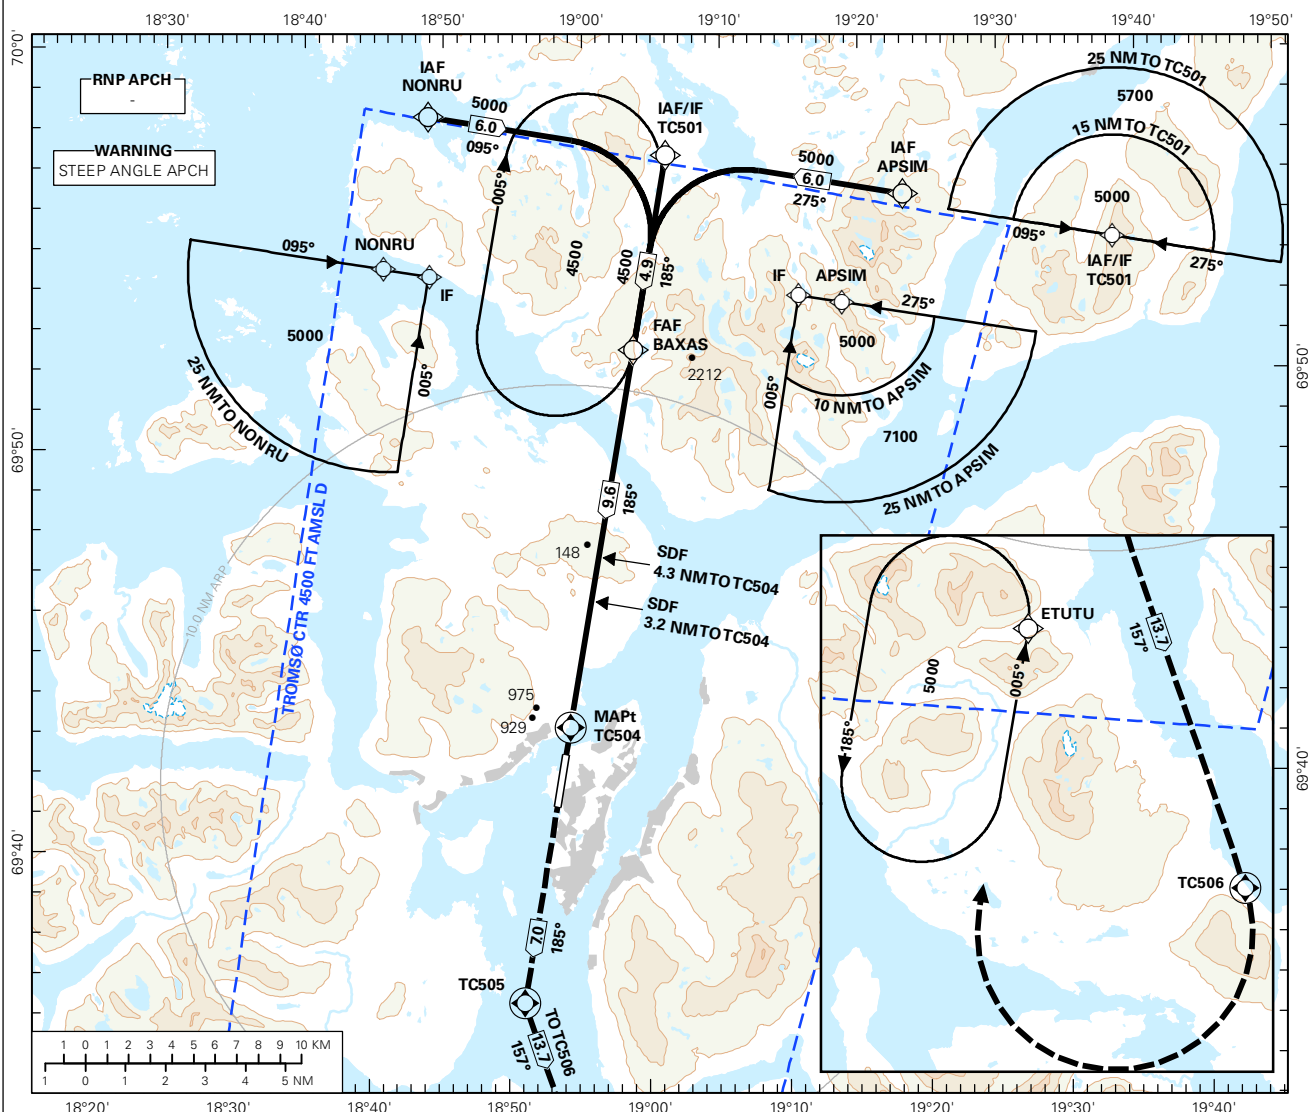


DIST TO TC504	9	8	7	6	5	4	3	2
ALT (HGT)	4260 (4245)	3840 (3825)	3420 (3405)	2990 (2975)	2570 (2555)	2150 (2135)	1720 (1705)	1300 (1285)

MISSED APCH:

CLIMB ON TRACK 185° TO TC505.
TURN LEFT TO TC506. TURN RIGHT DCT ETUTU.
ENTER ETUTU HOLDING CLIMBING TO 5000.

NOTE:

ACFT MAY REQUEST DIRECT ROUTING
TO ETUTU AFTER PASSING 5000.

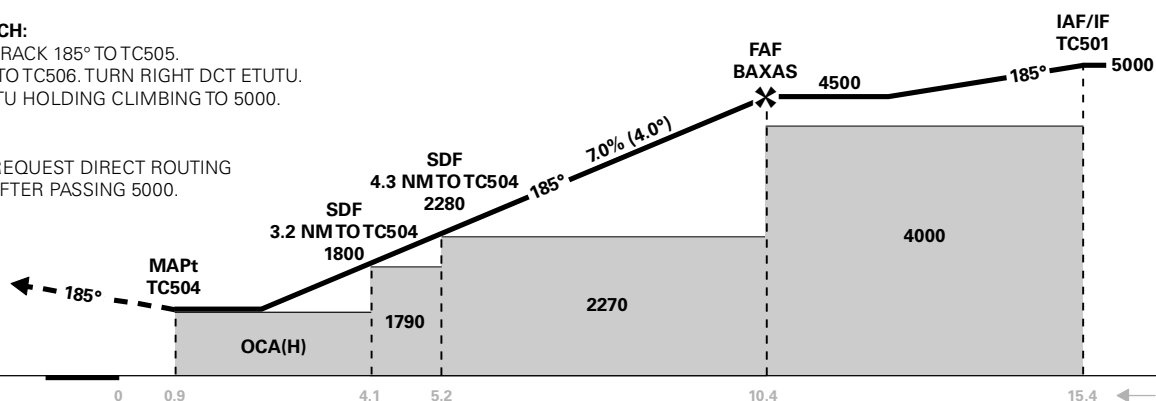

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 9.6
OCA(H)	1040 (1025)	1040 (1025)	1040 (1025)	1040 (1025)	SPEED	KT
STRAIGHT - IN	-	-	-	-	TIME	MIN:SEC
CIRCLING	1040 (1008)	2660 (2628)	2960 (2928)	2960 (2928)	ROD	FT/MIN

NOTE: CIRCLING E OF AD ONLY.

CHANGES: COMPLETE REVISION.

Avinor

26 MAY 2016

RECOMMENDED RNAV PROCEDURE CODING

ENTC RNAV(GNSS) RWY 19										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	NONRU	-	-	-	-	-	A5000+	-	-
020	TF	TC501	-	095 (102.7)	-	6.0	-	A5000+	-	-
010	IF	APSIM	-	-	-	-	-	A5000+	-	-
020	TF	TC501	-	275 (283.3)	-	6.0	-	A5000+	-	-
010	IF	TC501	-	-	-	-	-	A5000+	-	-
020	TF	BAXAS	-	185 (193.2)	-	4.9	-	A4500+	-	-
030	TF	TC504	Y	185 (193.2)	-	9.6	-	-	-	-4.0/15
040	TF	TC505	Y	185 (193.1)	-	7.0	-	A5000-	-	-
050	TF	TC506	Y	157 (165.1)	-	13.7	-	A5000-	-	-
060	DF	ETUTU	-	-	-	-	R	A5000-	-	-
070	HM	ETUTU	-	185 (193.2)	-	1 MIN	L	A5000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: BAXAS holding not included in standard APCH transitions.