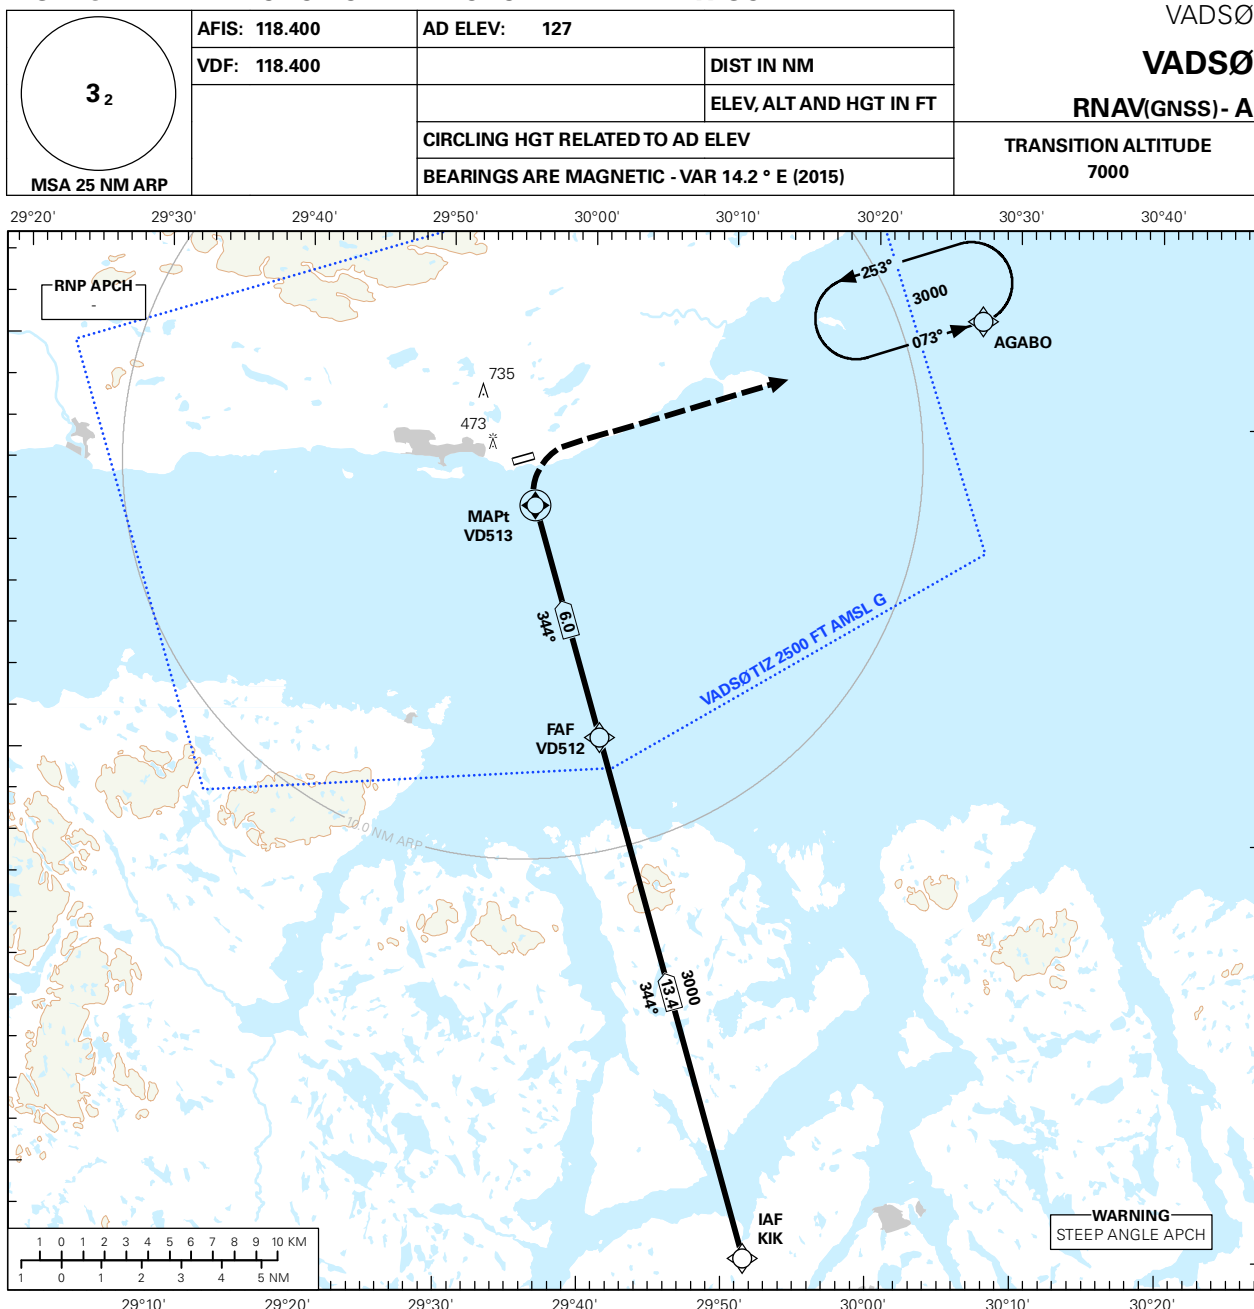


INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

VADSØ

VADSØ


RNAV(GNSS) - A

TRANSITION ALTITUDE
7000

DIST TO VD513	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	-	-	2610 (2483)	2190 (2063)	1780 (1653)	1360 (1233)

MISSED APCH:
TURN RIGHT DCT AGABO.
ENTER AGABO HOLDING CLIMBING TO 3000.

NOTE:
DESCENT GRADIENT CALCULATED FM FAF - MAPt

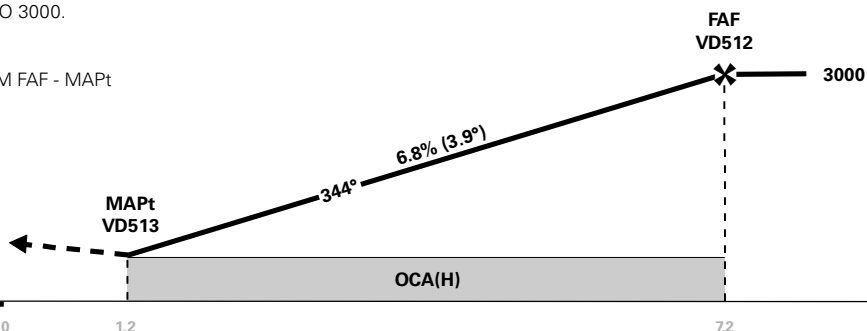

CAT OF ACFT		A	B	C	D	FINAL APCH		DIST FAF - MAPt: 6.0					
OCA(H) STRAIGHT - IN		-	-	-	-	SPEED	KT	70	90	100	120	130	
		-	-	-	-	TIME	MIN:SEC	05:07	03:59	03:35	02:59	02:46	
CIRCLING		530 (403)	620 (493)	-	-	ROD	FT/MIN	485	620	690	830	900	

NOTE: CIRCLING S OF AD ONLY.

CHANGES: MAG VAR, EDITORIALS.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENVD RNAV(GNSS)-A										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	KIK	-	-	-	-	-	-	-	-
020	TF	VD512	-	344 (358.6)	-	13.4	-	A3000+	-	-
030	TF	VD513	Y	344 (358.6)	-	6.0	-	-	-	-
040	DF	AGABO	-	-	-	-	R	A3000	-	-
050	HM	AGABO	-	073 (087.4)	-	1 MIN	L	A3000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.