

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000


VADSØ

VADSØ


RNAV (GNSS) RWY 08

TRANSITION ALTITUDE
7000

AFIS: 118.400	AD ELEV: 127	
VDF: 118.400	THR ELEV: 127	DIST IN NM
	HGT RELATED TO THR RWY 08	ELEV, ALT AND HGT IN FT
	CIRCLING HGT RELATED TO AD ELEV	
	BEARINGS ARE MAGNETIC - VAR 14.2 ° E (2015)	

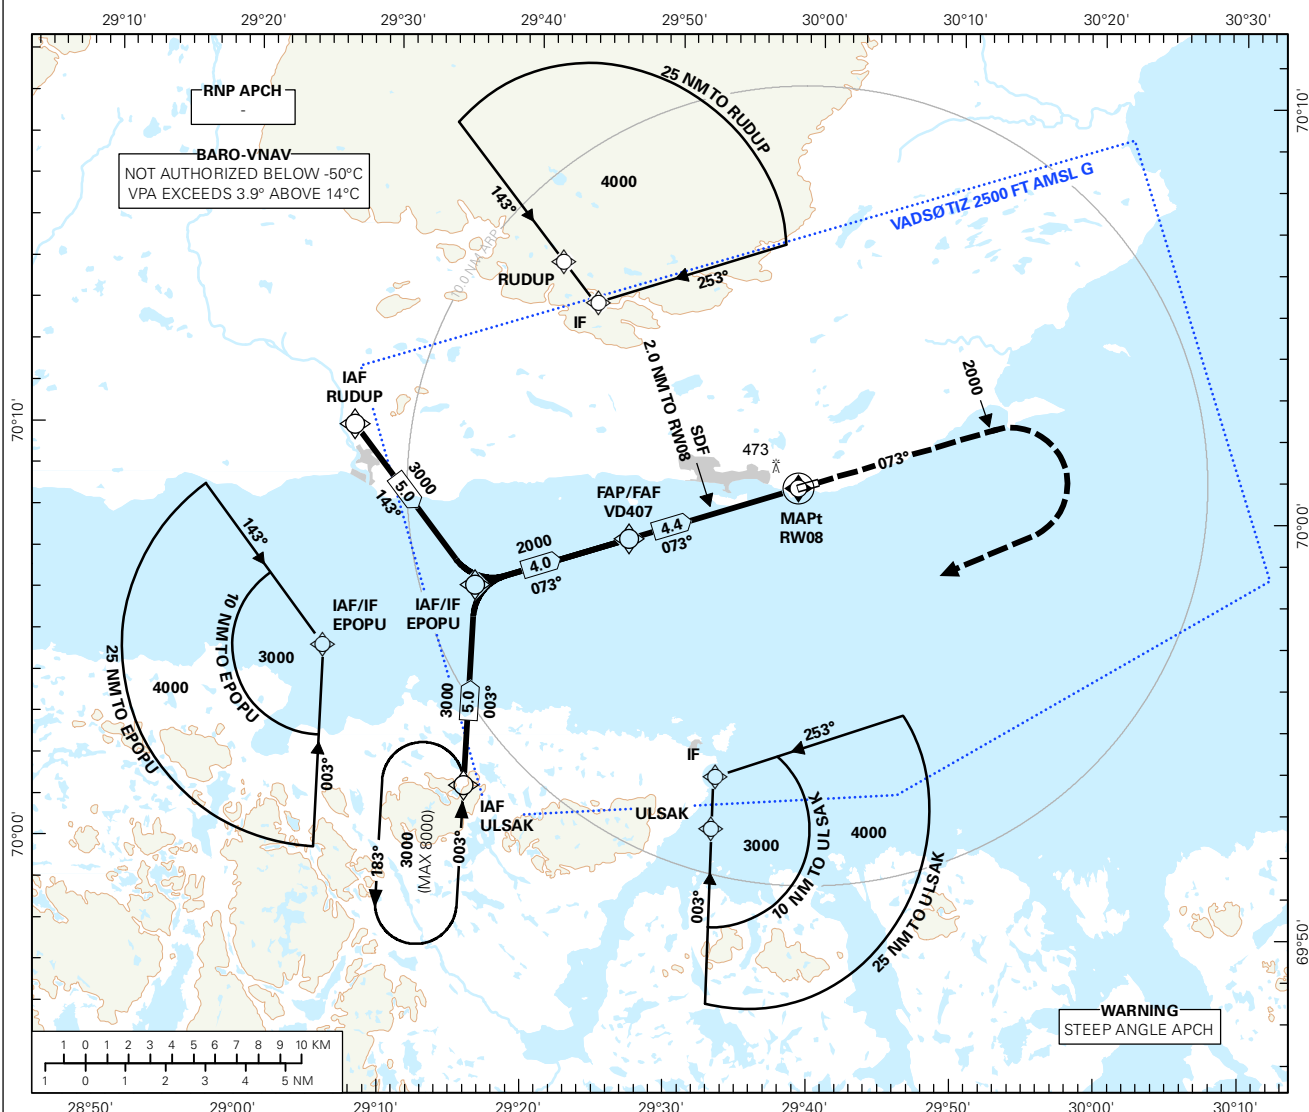

DIST TO RW08	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	-	-	-	1840 (1713)	1420 (1293)	1010 (883)

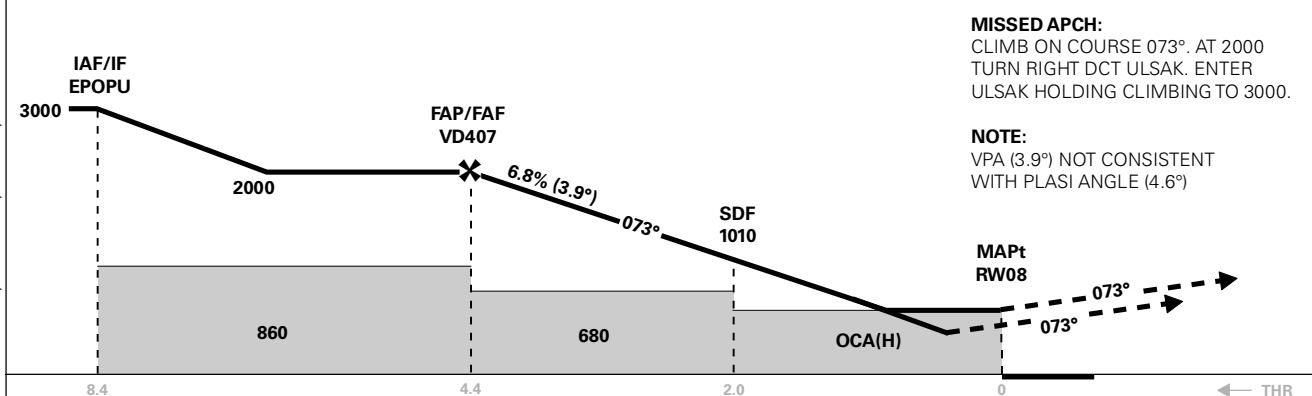

MISSED APCH:
CLIMB ON COURSE 073°. AT 2000
TURN RIGHT DCT ULSAK. ENTER
ULSAK HOLDING CLIMBING TO 3000.

NOTE:
VPA (3.9°) NOT CONSISTENT
WITH PLASI ANGLE (4.6°)

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 4.4
OCA(H)	560 (433)	570 (443)	-	-	SPEED	KT 70 90 100 120 130
STRAIGHT - IN	620 (493)	-	-	-	TIME	MIN:SEC 03:47 02:56 02:39 02:12 02:02
CIRCLING	620 (493)	-	-	-	ROD	FT/MIN 485 620 690 830 900

NOTE: CIRCLING S OF AD ONLY.

CHANGES: LNAV/VNAV MINIMA, MAG VAR, EPOPU, RUDUP.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENVD RNAV(GNSS) RWY 08										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/ TCH
010	IF	ULSAK	-	-	-	-	-	A3000+	-	-
020	TF	EPOPU	-	-	-	5.0	-	A3000+	-	-
010	IF	RUDUP	-	-	-	-	-	A3000+	-	-
020	TF	EPOPU	-	-	-	5.0	-	A3000+	-	-
010	IF	EPOPU	-	-	-	-	-	A3000+	-	-
020	TF	VD407	-	-	-	4.0	-	A2000+	-	-
030	TF	RW08	Y	-	-	4.4	-	-	-	-3.9/15
040	CA	-	-	073(087.4)	-	-	-	A2000+	-	-
050	DF	ULSAK	-	-	-	-	R	A3000	-	-
060	HM	ULSAK	-	003(016.8)	-	1 MIN	L	A3000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.