

INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

VADSØ

VADSØ

RNAV(GNSS) RWY 26

TRANSITION ALTITUDE
7000

AFIS: 118.400

AD ELEV: 127

VDF: 118.400


THR ELEV: 87

DIST IN NM

HGT RELATED TO THR RWY 26 ELEV, ALT AND HGT IN FT

CIRCLING HGT RELATED TO AD ELEV

BEARINGS ARE MAGNETIC - VAR 14.2 ° E (2015)

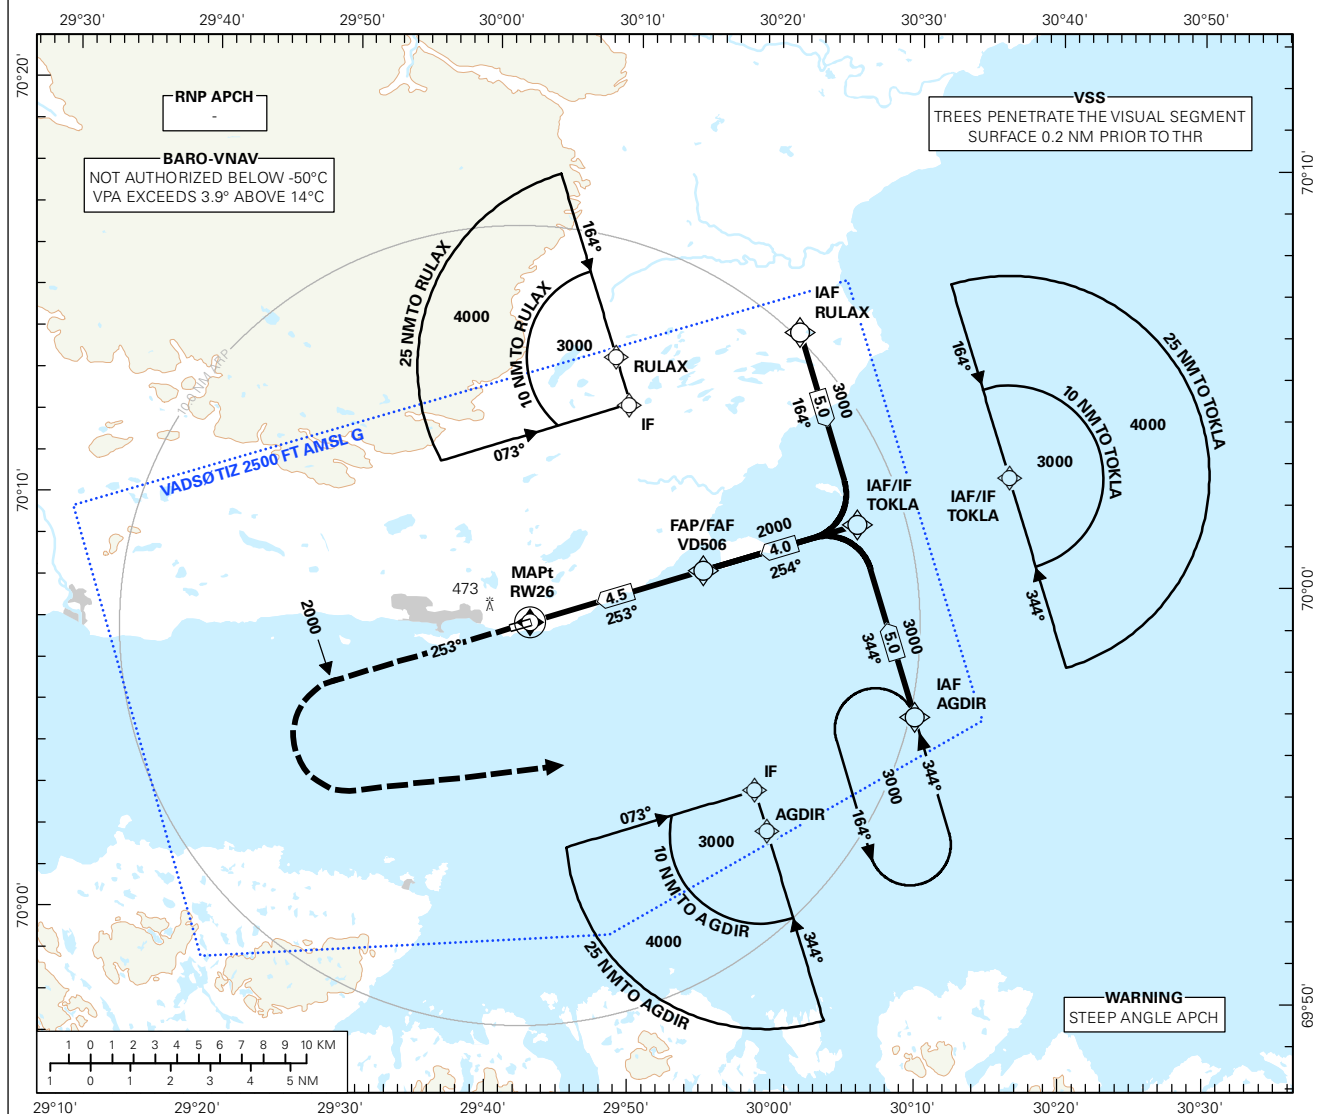


DIST TO RW26	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	-	-	-	1800 (1713)	1380 (1293)	970 (883)

MISSED APCH:

CLIMB ON COURSE 253°. AT 2000 TURN LEFT DCT AGDIR.
ENTER AGDIR HOLDING AT 3000.

NOTE:

VPA (3.9°) NOT CONSISTENT WITH PLASI ANGLE (4.5°)

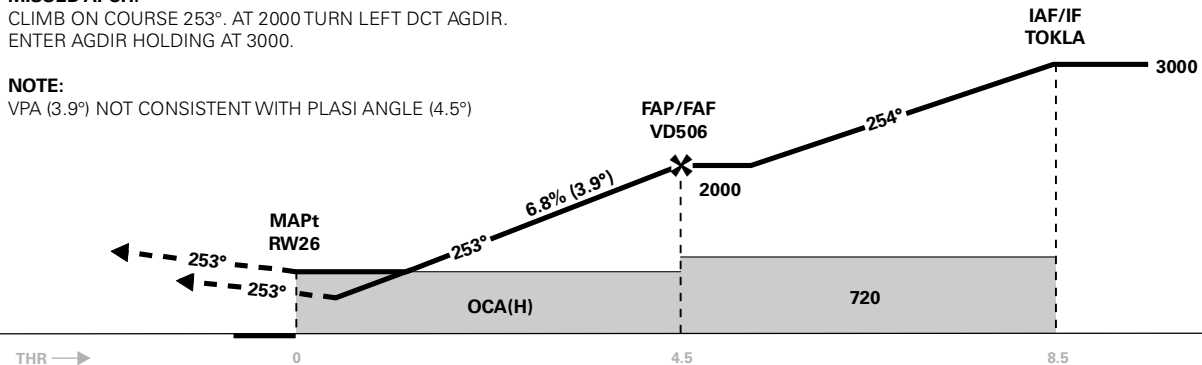

CAT OF ACFT		A	B	C	D	FINAL APCH		DIST FAF - MAPt: 4.5					
OCA(H) STRAIGHT - IN	LNAV/VNAV 2.5%*	470 (383)	490 (403)	-	-	SPEED	TIME	MIN:SEC	03:52	03:00	02:42	02:15	02:05
	LNAV/VNAV 3.0%*	450 (363)	470 (383)	-	-								
	LNAV/VNAV 4.0%*	440 (353)	450 (363)	-	-								
CIRCLING	LNAV 2.5 %*	560 (473)	600 (513)	-	-	ROD	FT/MIN	485	620	690	830	895	
		560 (433)	600 (473)	-	-								

NOTE: *MNM MISSED APCH GRADIENT. CIRCLING S OF AD ONLY.

CHANGES: COMPLETE REVISION.

Avinor

02 FEB 2017

RECOMMENDED RNAV PROCEDURE CODING

ENVD RNAV(GNSS) RWY 26										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	AGDIR	-	-	-	-	-	A3000+	-	-
020	TF	TOKLA	-	-	-	5.0	-	A3000+	-	-
010	IF	RULAX	-	-	-	-	-	A3000+	-	-
020	TF	TOKLA	-	-	-	5.0	-	A3000+	-	-
010	IF	TOKLA	-	-	-	-	-	A3000+		
020	TF	VD506	-	-	-	4.0	-	A2000+	-	-
030	TF	RW26	Y	-	-	4.5	-	-	-	-3.9/15
040	CA	-	-	253(267.5)	-	-	-	A2000	-	-
050	DF	AGDIR	-	-	-	-	L	A3000	-	-
060	HM	AGDIR	-	344(357.8)	-	1 MIN	L	A3000+	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.