


STANDARD ARRIVAL CHART INSTRUMENT (RNAV 1 STAR BASED ON GNSS)

64 MSA 25 NM ARP	ATIS: 128.650	ALT AND ELEV ARE IN FT DIST IN NM			ÅLESUND/VIGRA RWY 24 NORWAY DEKEB 1R, OBITI 2R, TUMIM 3R
	APP: 129.325				
	TWR: 118.100				
		1:1 000 000	VAR: 0.5 ° E (2015)	TA 7000	

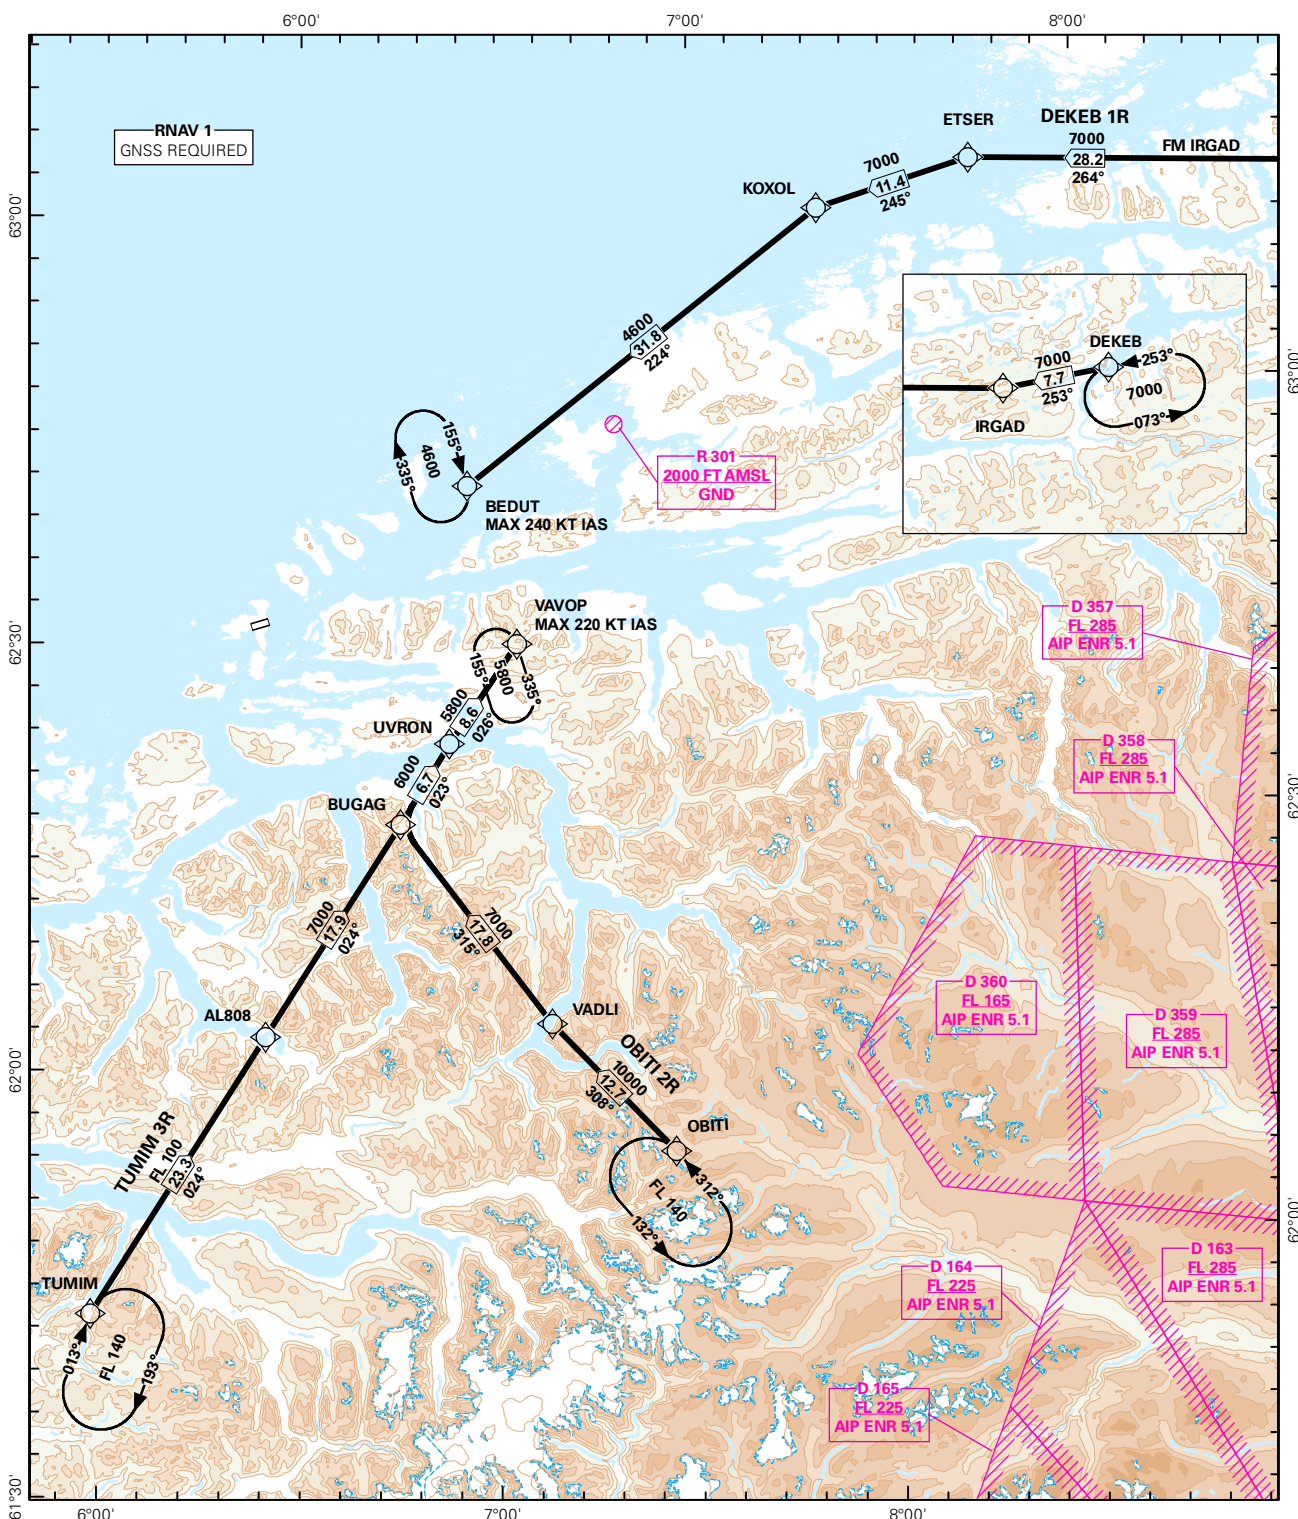

CHANGES: RWY ID, TUMIM 3R, EDITORIALS.

**STANDARD ARRIVAL ROUTES INSTRUMENT
(RNAV 1 STAR BASED ON GNSS)**
**Ålesund/Vigra
RWY 24**
GENERAL: Surveillance service shall be available.

**LOSS OF RNAV 1
CAPABILITY:** Request vectoring.

VECTORIZING: Vectoring may be used for sequencing.

**RADIO COMMUNICATION
FAILURE:** Squawk A7600. Proceed on STAR and make APCH to RWY 24.

DESIGNATOR	ROUTE	RESTRICTIONS	DESCEND	CLEARANCE LIMIT
DEKEB 1R (DEKEB ONE ROMEO ARRIVAL)	From DEKEB, to IRGAD, to ETSER, to KOXOL, to BEDUT	Cross DEKEB at or above 7000 FT. Cross KOXOL at or above 7000 FT. Cross BEDUT at or above 4600 FT and MAX 240 KT IAS.	As cleared by ATC.	BEDUT
OBITI 2R (OBITI TWO ROMEO ARRIVAL)	From OBITI, to VADLI, to BUGAG, to UVRON, to VAVOP.	Cross OBITI at or above FL 140. Cross VADLI at or above 10 000 FT. Cross BUGAG at or above 7000 FT. Cross UVRON at or above 6000 FT. Cross VAVOP at or above 5800 FT and MAX 220 KT IAS.	As cleared by ATC.	VAVOP
TUMIM 3R (TUMIM THREE ROMEO ARRIVAL)	From TUMIM, to AL808, to BUGAG, to UVRON, to VAVOP.	Cross TUMIM at or above FL 140. Cross AL808 at or above FL 100. Cross BUGAG at or above 7000 FT. Cross UVRON at or above 6000 FT. Cross VAVOP at or above 5800 FT and MAX 220 KT IAS.	As cleared by ATC.	VAVOP