
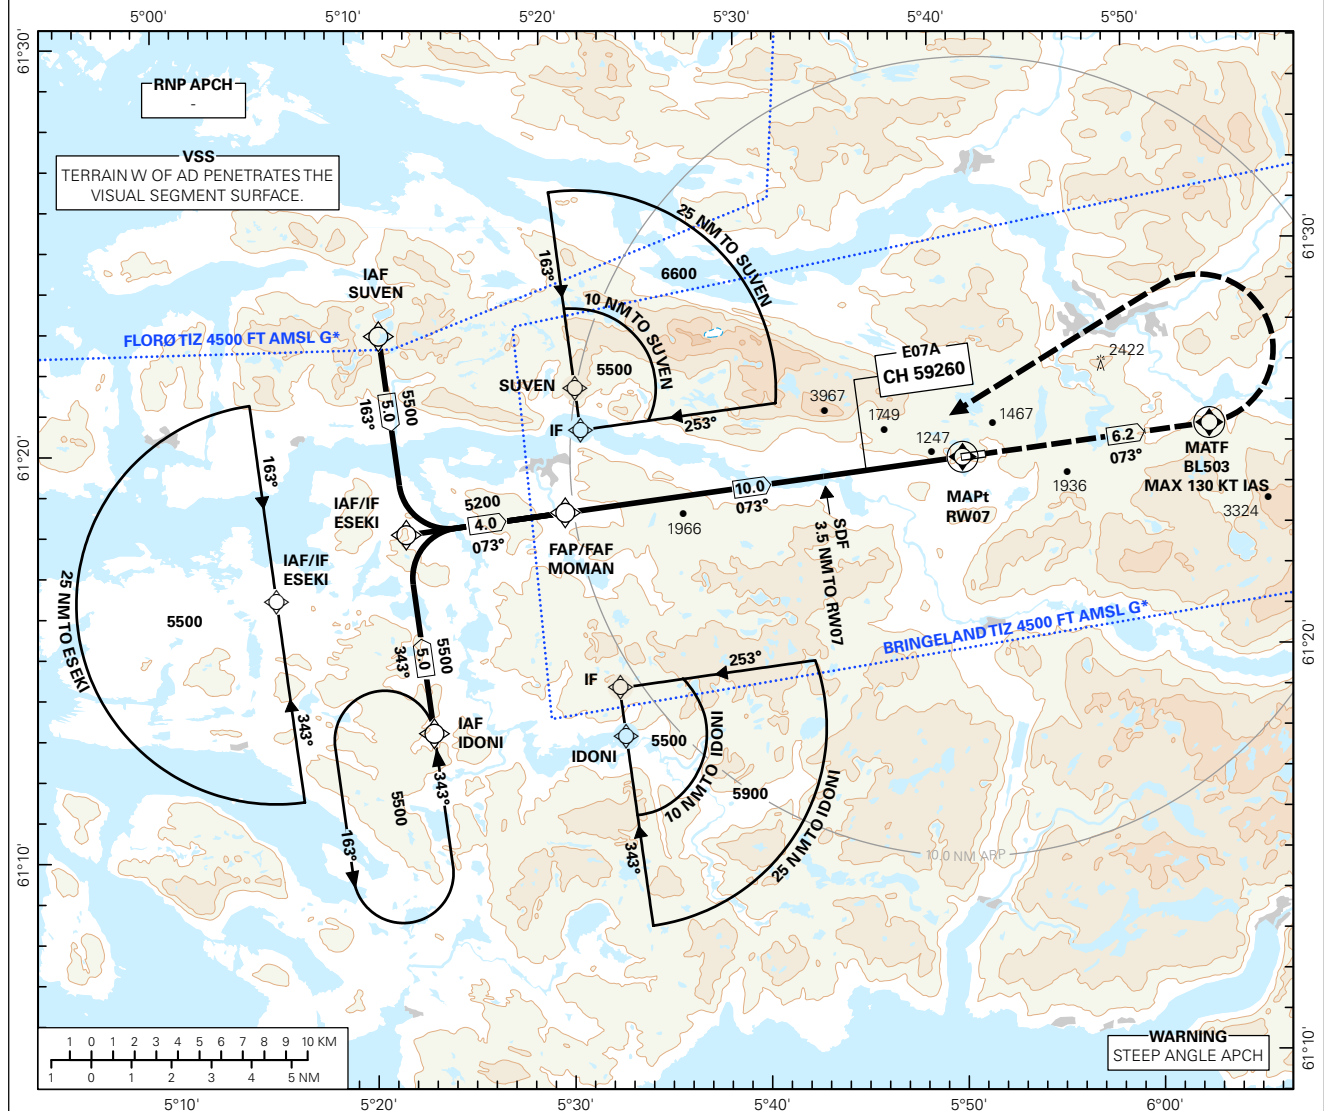


INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000

FØRDE

BRINGELAND**RNAV(GNSS) RWY 07****TRANSITION ALTITUDE
6000**

DIST TO THR	11	10	9	8	7	6	5	4
ALT (HGT)	-	5200 (4171)	4790 (3761)	4380 (3351)	3970 (2941)	3560 (2531)	3140 (2111)	2730 (1701)

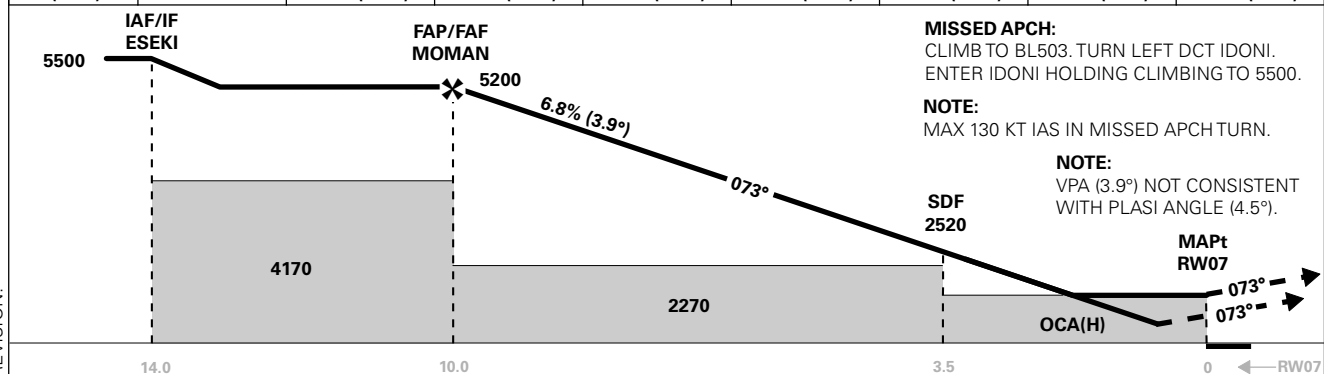

CAT OF ACFT		A	B	C	D	FINAL APCH		DIST FAF - RW07: 10.0					
OCA(H) STRAIGHT - IN	LPV 2.5%*	1990 (961)	1996 (967)	-	-	SPEED	KT	70	90	100	120	130	
	LPV 3.0%*	1671 (642)	1688 (659)	-	-								
	LPV 4.0%*	1541 (512)	1565 (536)	-	-	TIME	MIN:SEC	08:35	06:40	06:00	05:00	04:37	
	LPV 5.0%*	1457 (428)	1481 (452)	-	-								
	LNAV 2.5%*	2380 (1351)	2400 (1371)	-	-	ROD	FT/MIN	480	620	685	825	895	
CIRCLING	LNAV 3.0%*	2180 (1151)	2200 (1171)	-	-								
	LNAV 4.0%*	1810 (781)	1840 (811)	-	-								
		2400 (1355)	2970 (1925)	-	-								

NOTE: CIRCLING S OF AD ONLY. *MNM MISSED APCH CLIMB GRADIENT.

Avinor

28 MAY 2015

CHANGES: COMPLETE REVISION.

RECOMMENDED RNAV PROCEDURE CODING

ENBL RNAV(GNSS) RWY 07										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	IDONI	-	-	-	-	-	A5500+	-	-
020	TF	ESEKI	-	343 (343.5)	-	5.0	-	A5500+	-	-
010	IF	SUVEN	-	-	-	-	-	A5500+	-	-
020	TF	ESEKI	-	163 (163.4)	-	5.0	-	A5500+	-	-
010	IF	ESEKI	-	-	-	-	-	A5500+	-	-
020	TF	MOMAN	-	073 (073.4)	-	4.0	-	A5200+	-	-
030	TF	RW07	Y	073 (073.5)	-	10.0	-	-	-	-
040	TF	BL503	Y	073 (073.8)	-	6.2	-	A5500	-	-
050	DF	IDONI	-	-	-	-	L	A5500	-	-
060	HM	IDONI	-	343 (343.5)	-	1 MIN	L	A5500	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operation Type A limitations.

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	360.0
SBAS Provider	1	FPAP latitude	612340.6155N
Airport Identifier	ENBL	FPAP longitude	0054653.3730E
Runway	RW07	Threshold crossing height	15
Approach performance designator	0	TCH units	M
Route Indicator	-	Glide path angle	3.9
Reference path data selector	0	Course width at threshold	105
Reference path Identifier	E07A	Length offset	648
LTP/FTP latitude	612325.3780N	Horizontal alert limit (HAL)	40
LTP/FTP longitude	0054503.6950E	Vertical alert limit (VAL)	50
PRECISION APPROACH PATH CRC REMAINDER			4521798E

NON FAS DATA BLOCK FIELDS

LTP Ortometric Height	313.5
FPAP Ortometric Height	318.6