



INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000


BARDUFOSS

BARDUFOSS**ILS or LOC RWY 28**TRANSITION ALTITUDE
7000

ATIS: 129.725	AD ELEV: 252		
APP: 118.800 125.850	THR ELEV: 219	DIST IN NM	
TWR: 118.100 122.100	HGT RELATED TO THR RWY 28	ELEV, ALT AND HGT IN FT	
VDF: 118.800	CIRCLING HGT RELATED TO AD ELEV		
BEARINGS ARE MAGNETIC - VAR 7.6 ° E (2015)			

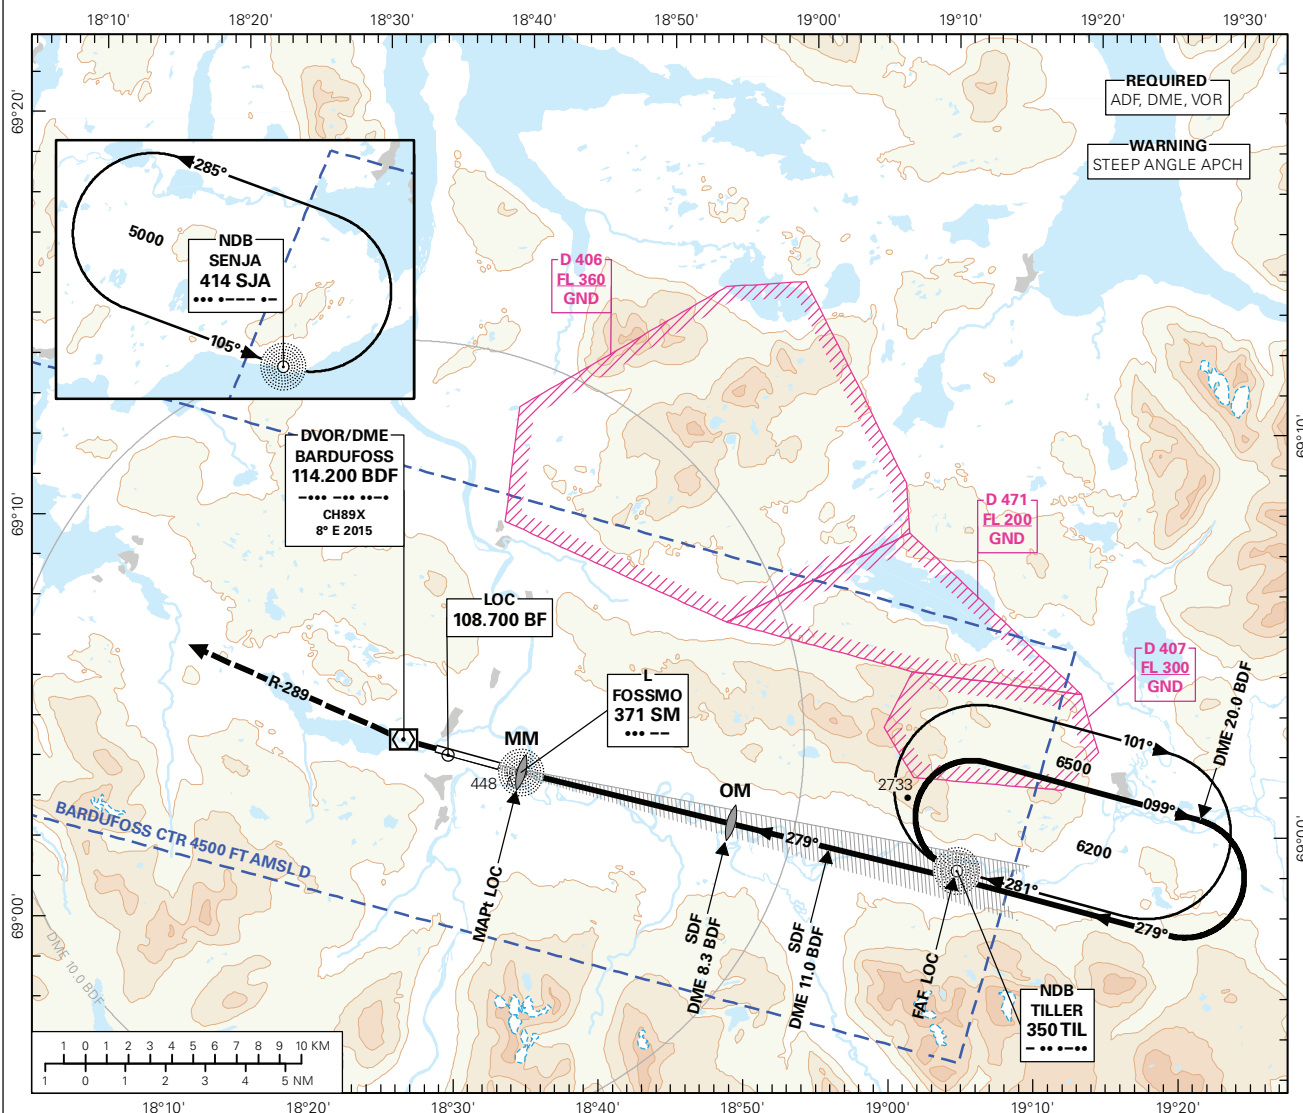

DIST TO BDF	11	10	9	8	7	6	5	4
ALT (HGT)	3730 (3511)	3330 (3111)	2930 (2711)	2540 (2321)	2140 (1921)	1740 (1521)	1340 (1121)	940 (721)

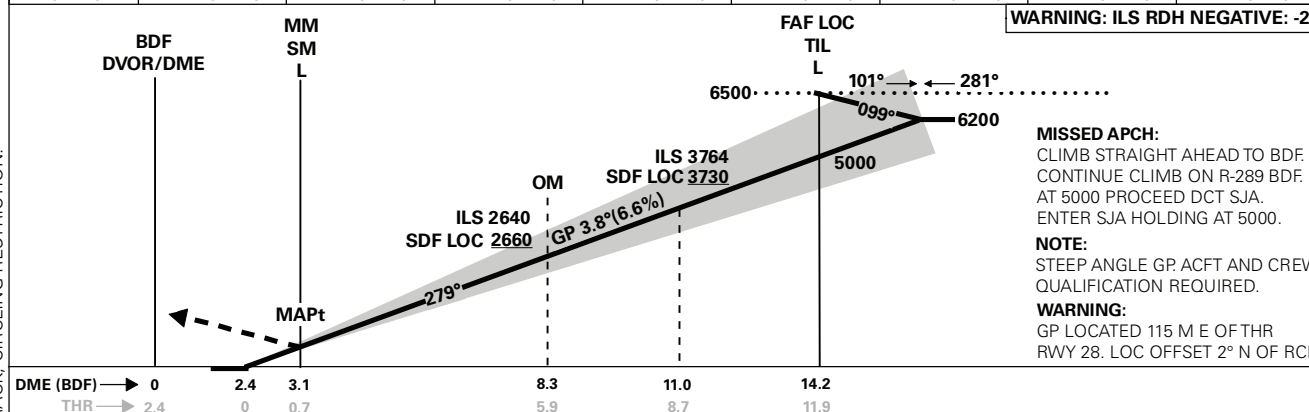

MISSED APCH:
CLIMB STRAIGHT AHEAD TO BDF.
CONTINUE CLIMB ON R-289 BDF.
AT 5000 PROCEED DCT SJA.
ENTER SJA HOLDING AT 5000.

NOTE:
STEEP ANGLE GP ACFT AND CREW
QUALIFICATION REQUIRED.

WARNING:
GP LOCATED 115 M E OF THR
RWY 28. LOC OFFSET 2° N OF RCL.

CAT OF ACFT		A	B	C	D	FINAL APCH	DIST FAF - MAPt: 11.2					
OCA(H) STRAIGHT - IN	ILS	787 (568)	801 (582)	815 (596)	829 (610)		SPEED	KT	70	90	120	150
	LOC	790 (571)	810 (591)	820 (601)	830 (611)	MIN:SEC		09:35	07:27	05:35	04:28	03:44
		-	-	-	-	TIME		FT/MIN	465	600	800	995
CIRCLING		1670 (1418)	1760 (1508)	2570 (2318)	3940 (3688)	ROD	FT/MIN	465	600	800	995	1195

NOTE: CIRCLING S OF AD ONLY

CHANGES: RACETRACK, CIRCLING RESTRICTION.

Avinor

15 SEP 2016