


RØST

RØST


RNAV(GNSS) RWY 03

TRANSITION ALTITUDE
7000



CLIMB ON COURSE 025° TO RS501. TURN RIGHT DCT DIVOL.
ENTER DIVOL HOLDING CLIMBING TO 4000.

VPA (3.5°) NOT CONSISTENT WITH PLASI ANGLE (4.5°).

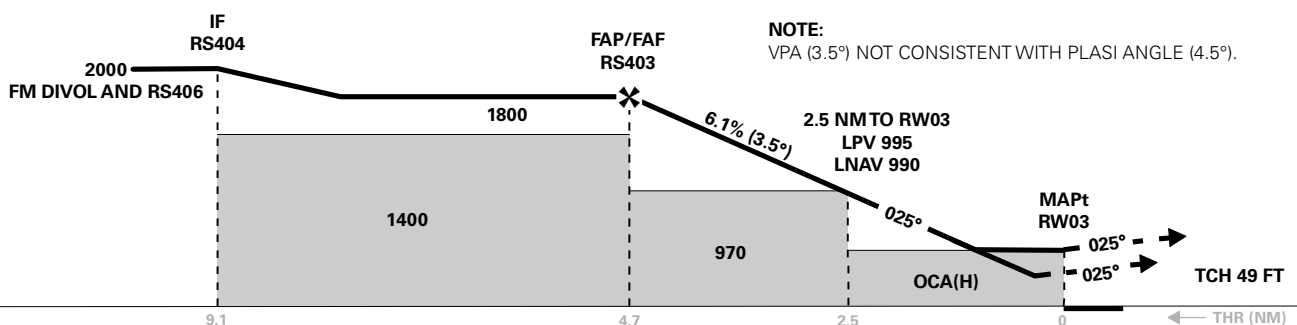

NOTE: *MNM MISSED APCH CLIMB GRADIENT.

RECOMMENDED RNAV PROCEDURE CODING

ENRS RNAV(GNSS) RWY 03										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/ TCH (M)
010	IF	DIVOL	-	-	-	-	-	A4000+	-	-
020	TF	RS404	-	295 (298.6)	-	5.0	-	A2000+	-	-
010	IF	RS406	-	-	-	-	-	A4000+	-	-
020	TF	RS404	-	115 (118.2)	-	5.0	-	A2000+	-	-
010	IF	RS404	-	-	-	-	-	A2000+	-	-
020	TF	RS403	-	025 (028.4)	-	4.4	-	A1800+	-	-
030	TF	RW03	Y	025 (028.5)	-	4.7	-	-	-	-3.5/15
040	CF	RS501	Y	025 (028.6)	-2.9	5.2	-	-	-	-
050	DF	DIVOL	-	-	-	-	R	-	-	-
060	HM	DIVOL	-	205 (208.9)	-	-	R	A4000	-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Note: The use of SBAS/GNSS geometric altitude as a source of altitude for approaches to LNAV/VNAV minima is permitted only for aircraft specifically certified for this type of operation. See "EASA-CM-AS-002 Clarifications to AMC 20-27" for additional information.

Note: Published OCA(H) values are obstacle clearance values. Decision heights (DH) below 250 FT shall not be used due to APV approach operations Type A limitations.

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	42.6
SBAS Provider	1	FPAP latitude	673210.0475N
Airport Identifier	ENRS	FPAP longitude	0120655.1580E
Runway	RW03	Threshold crossing height	15
Approach performance designator	0	TCH units	M
Route Indicator	-	Glide path angle	3.5
Reference path data selector	0	Course width at threshold	105
Reference path Identifier	E03A	Length offset	704
LTP/FTP latitude	673122.0045N	Horizontal alert limit (HAL)	40
LTP/FTP longitude	0120546.7355E	Vertical alert limit (VAL)	50
PRECISION APPROACH PATH POINT CRC REMAINDER			30A5CA03

NON FAS DATA BLOCK FIELDS

LTP Ortometric Height	2.8
FPAP Ortometric Height	2.8