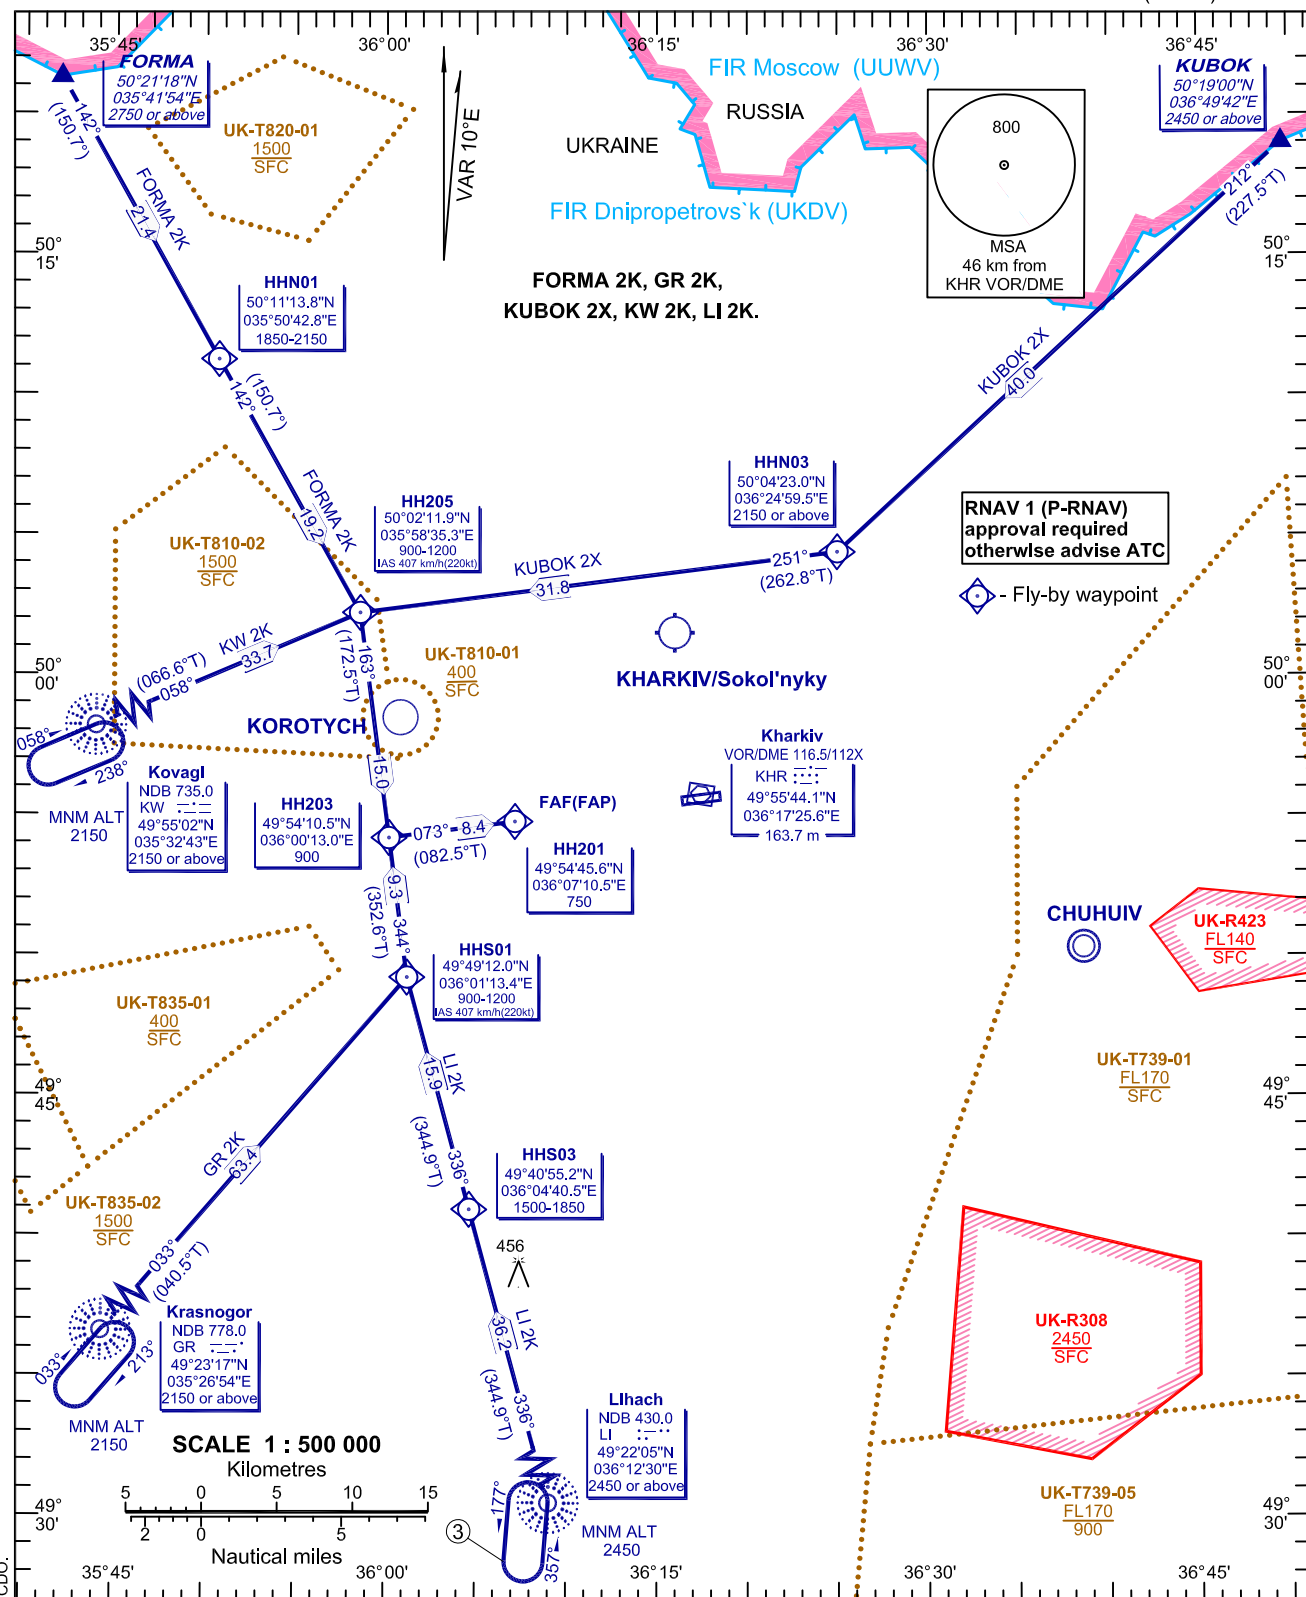


RNAV ARRIVAL PROCEDURE
TRANSITION TO FINAL APPROACHTRANSITION LEVEL: by ATC
TRANSITION ALT: 3050Radar 118.800
TWR 118.100
ATIS 126.750(ENG) 127.600(RUS)KHARKIV/Osнова
RNAV (GNSS) RWY 07

NOTE:

1. Expect vectors to final.
2. For final approach see ILS or LOC instrument approach chart UKHH RWY 07.
3. Available for missed approach only at 3050 AMSL.

BEARINGS AND TRACKS ARE MAGNETIC
ALTITUDES, HEIGHTS AND ELEVATIONS ARE IN METRES
DISTANCES ARE IN KILOMETRES

Continuous Descent Operations (CDO)

1. CDO are performed during periods of low traffic density.
2. CDO may be requested by the pilot or offered by the controller.
3. After receiving a "WHEN READY DESCEND TO (LEVEL)" or "DESCEND TO (LEVEL) AT PILOTS DISCRETION" clearance plan/optimize the vertical profile in order to apply CDO technique to the FAP.
4. Specified minimum level at waypoints must be adhered to unless specifically cancelled by ATC.
5. Maintain MAX IAS 220 kt at a distance of 20 track miles from touchdown.
6. For operational regulations refer to UKHH AD 2.22 and ENR 1.5.

RNAV ARRIVAL PROCEDURE					RNAV 1 (GNSS) RWY 07		
Name	Path description	Fix identifier (Waypoint name)	Flyover	Course °M (°T)	Turn direction	Altitude	Speed limit
FORMA 2K FORMA TWO KILO	IF	FORMA	-	-	-	+ 2750	-
	TF	HHN01	N	142 (150,7)	-	1850-2150	-
	TF	HH205	N	142 (150,7)	-	900-1200	407km/h (220kt)
	TF	HH203	N	163 (172,5)	R	900	-
	TF	HH201	N	073 (082,5)	L	750	-
KUBOK 2X KUBOK TWO X-RAY	IF	KUBOK	-	-	-	+ 2450	-
	TF	HHN03	N	212 (227,5)	-	+ 2150	-
	TF	HH205	N	251 (262,8)	R	900-1200	407km/h (220kt)
	TF	HH203	N	163 (172,5)	L	900	-
	TF	HH201	N	073 (082,5)	L	750	-
KW 2K Kovagi TWO KILO	IF	KW	-	-	-	+ 2150	-
	TF	HH205	N	058 (066,6)	-	900-1200	407km/h (220kt)
	TF	HH203	N	163 (172,5)	R	900	-
	TF	HH201	N	073 (082,5)	L	750	-
GR 2K Krasnogor TWO KILO	IF	GR	-	-	-	+ 2150	-
	TF	HHS01	N	033 (040,5)	-	900-1200	407km/h (220kt)
	TF	HH203	N	344 (352,6)	L	900	-
	TF	HH201	N	073 (082,5)	R	750	-
LI 2K Lihach TWO KILO	IF	LI	-	-	-	+ 2450	-
	TF	HHS03	N	336 (344,9)	-	1500-1850	-
	TF	HHS01	N	336 (344,9)	-	900-1200	407km/h (220kt)
	TF	HH203	N	344 (352,6)	R	900	-
	TF	HH201	N	073 (082,5)	R	750	-

RNAV HOLDINGS

Fix identifier (Waypoint name)	Inbound Track °M (°T)	Turn direction	Minimum Altitude	Time MIN	Distance	Speed limit
KW	058 (066,6)	R	2150	1	-	463km/h (250kt)
GR	033 (040,5)	R	2150	1	-	463km/h (250kt)

WAYPOINTS

Waypoint name	Coordinates		Waypoint name	Coordinates		Waypoint name	Coordinates	
FORMA	50°21'18,0"N	035°41'54,0"E	HHN01	50°11'13,8"N	035°50'42,8"E	KW	49°55'02,0"N	035°32'43,0"E
GR	49°23'17,0"N	035°26'54,0"E	HHN03	50°04'23,0"N	036°24'59,5"E	LI	49°22'05,0"N	036°12'30,0"E
HH201(FAF/FAP)	49°54'45,6"N	036°07'10,5"E	HHS01	49°49'12,0"N	036°01'13,4"E			
HH203	49°54'10,5"N	036°00'13,0"E	HHS03	49°40'55,2"N	036°04'40,5"E			
HH205	50°02'11,9"N	035°58'35,3"E	KUBOK	50°19'00,0"N	036°49'42,0"E			

INTENTIONALLY LEFT BLANK
СТРАНИЦА НАМЕРЕННО ОСТАВЛЕНА НЕЗАПОЛНЕННОЙ